# MAIN - one flat custom plate

FT02_MAIN_220_T1500_FIT_TRIAL

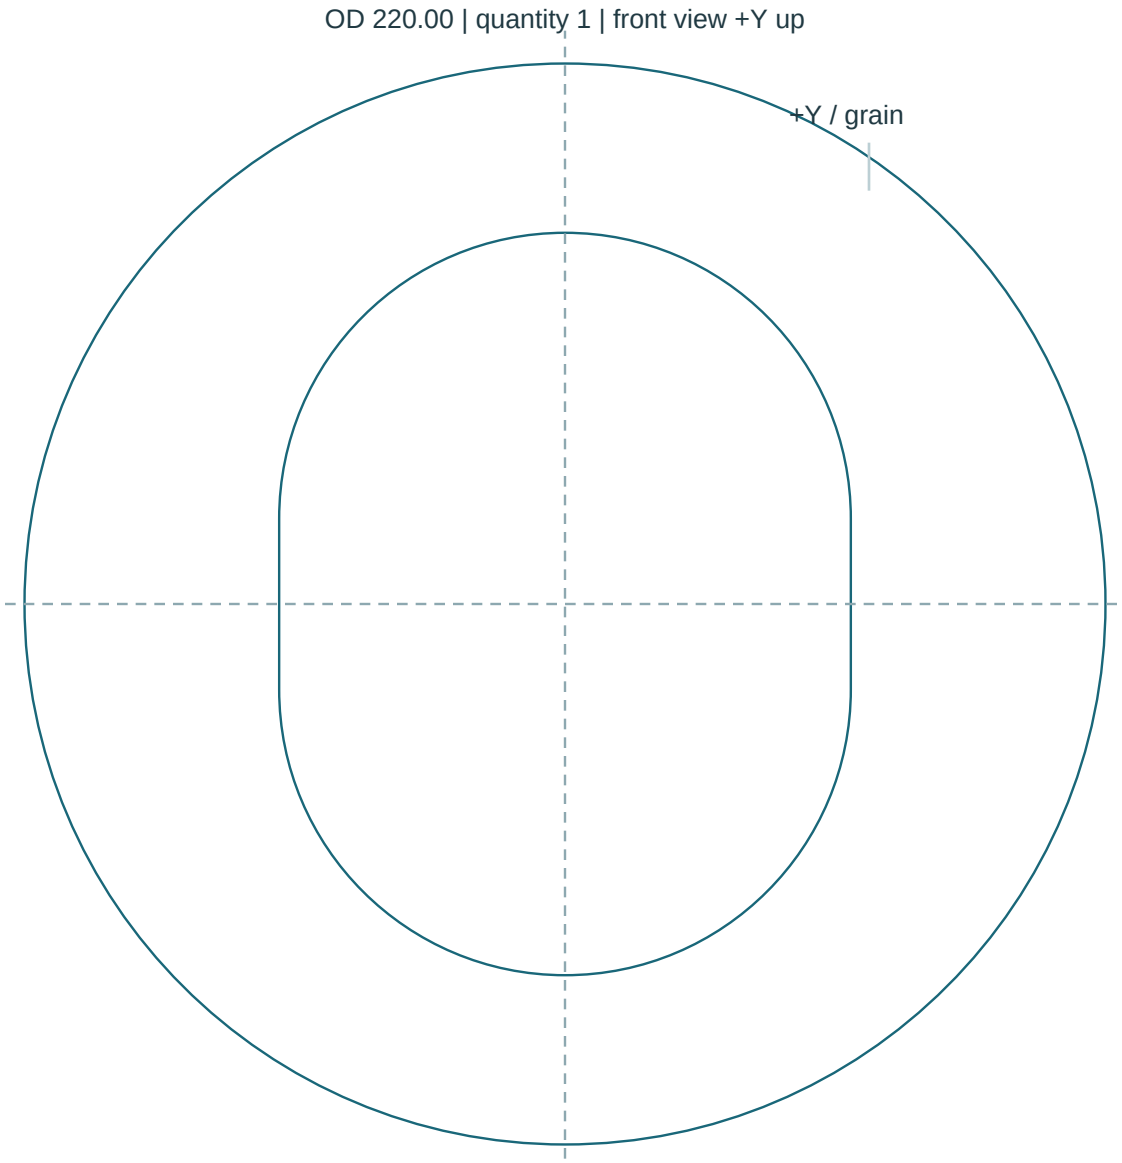


Centered vertical capsule 116.35 x 151.10; ends R58.175; arc centers (0, +/-17.375). No mounting holes/tabs.

Thickness 1.500 mm. Outer center X=Y=0; back Z=0; front Z=1.500. STEP is one solid. Acrylic CUT DXF is compensated; STEP is the finished profile. All files use mm. View above is 65%, dimensions govern.

Ponoko clear acrylic: 1.50 mm nominal, catalog range 1.27-1.73. Dry-fit only. PONOKO_K020_CUT DXF uses 0.20 mm nominal kerf compensation; this drawing and STEP show FINISHED targets. No second compensation. Requested profile +/-0.25 mm.

Flatness target 0.5 mm; report actual stock thickness. Smooth/deburr both faces and all edges; remove cutting microtabs without altering profile. Protect cosmetic face; align grain +Y on both plates. No bends, threads or countersinks. These are requested shop targets, not supplier certifications.

# DIV - one flat custom plate

FT02_DIV_124_T1500_FIT_TRIAL

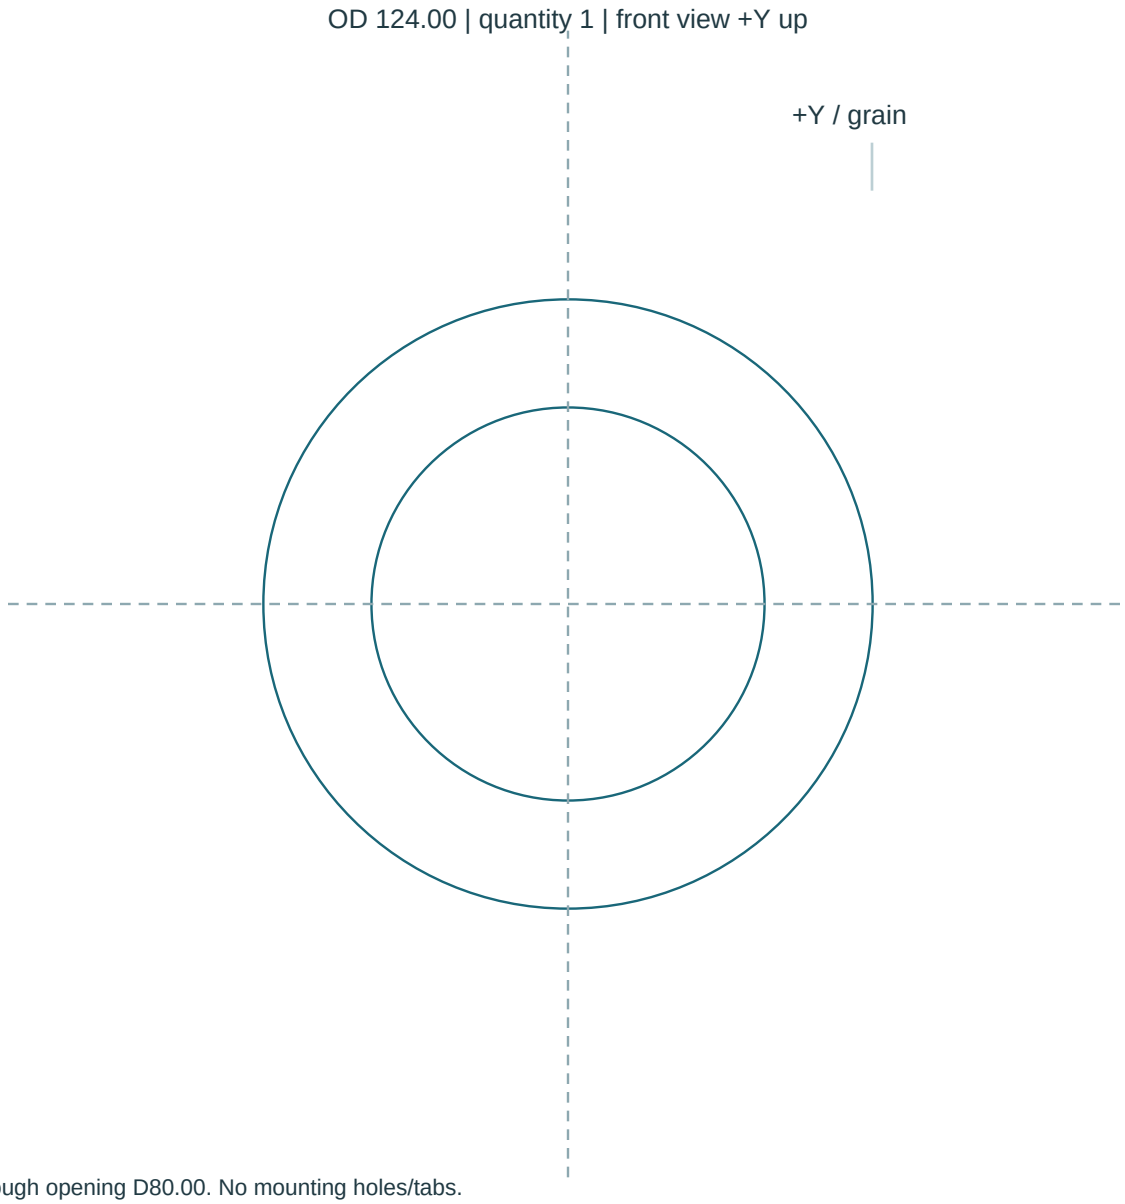


Concentric through opening D80.00. No mounting holes/tabs.

Thickness 1.500 mm. Outer center X=Y=0; back Z=0; front Z=1.500. STEP is one solid. Acrylic CUT DXF is compensated; STEP is the finished profile. All files use mm. View above is 65%, dimensions govern.

Ponoko clear acrylic: 1.50 mm nominal, catalog range 1.27-1.73. Dry-fit only. PONOKO_K020_CUT DXF uses 0.20 mm nominal kerf compensation; this drawing and STEP show FINISHED targets. No second compensation. Requested profile +/-0.25 mm.

Flatness target 0.5 mm; report actual stock thickness. Smooth/deburr both faces and all edges; remove cutting microtabs without altering profile. Protect cosmetic face; align grain +Y on both plates. No bends, threads or countersinks. These are requested shop targets, not supplier certifications.