MAIN - one flat custom plate

FT02_MAIN_220_T1520_FIT_TRIAL

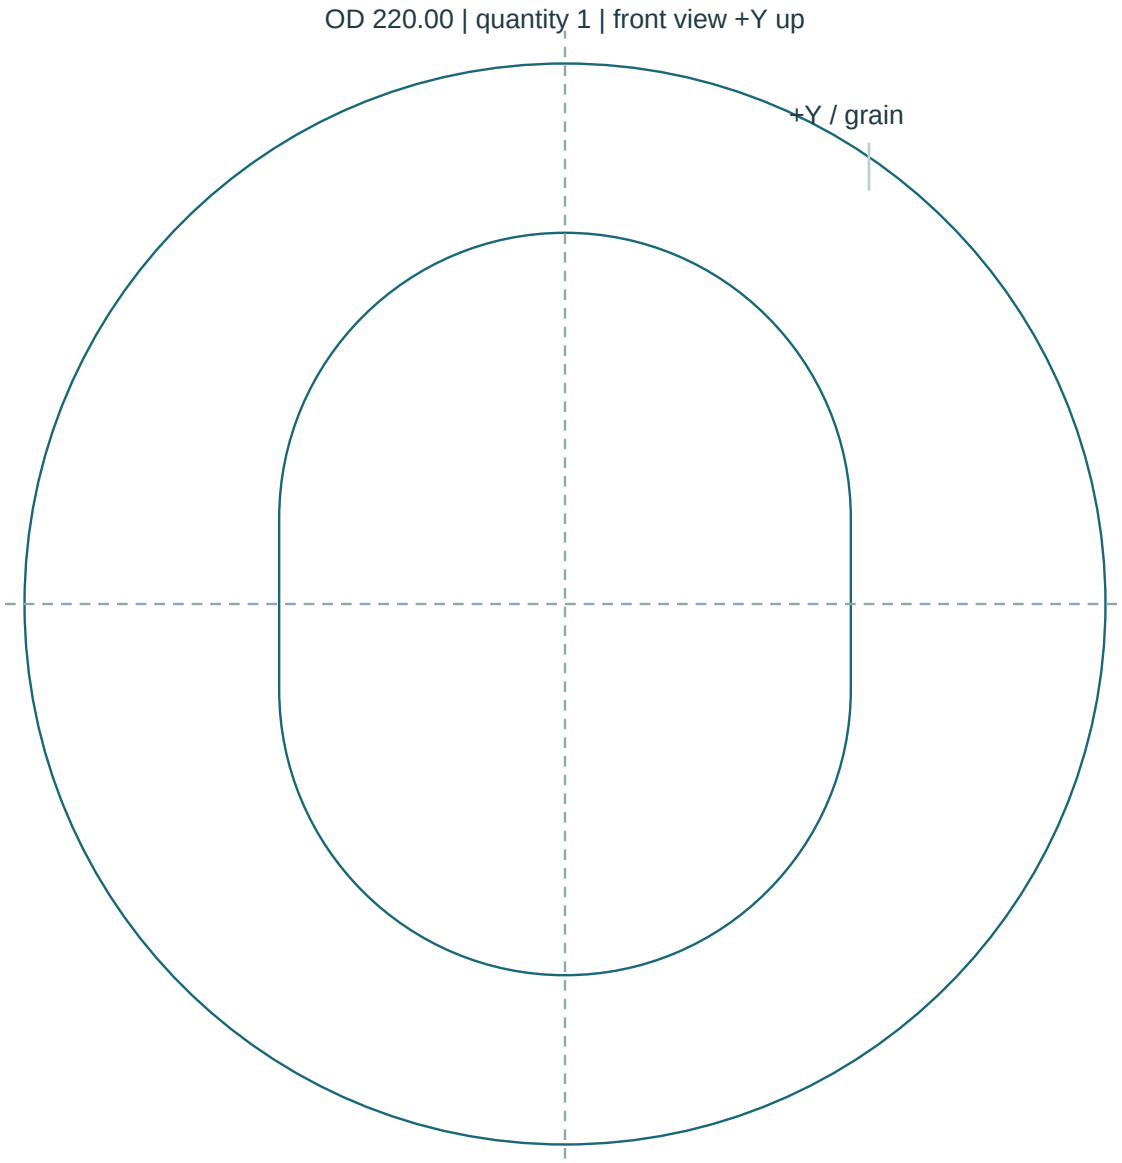

Centered vertical capsule 116.35 x 151.10; ends R58.175; arc centers (0, +/-17.375). No mounting holes/tabs.

Thickness 1.520 mm. Outer center X=Y=0; back Z=0; front Z=1.520. STEP is one solid. Metal DXF is the finished profile, without customer kerf compensation. All files use mm. View above is 65%, dimensions govern.

Ponoko #4 brushed304:1.52 mm nominal, catalog range1.44-1.64. Brushed one face; actual quote offers linear deburring on MAIN only. DIV has As-cut only. Safe edges, cosmetic face and matching grain still require confirmation/secondary finishing. Requested profile +/-0.13 mm.

Flatness target 0.5 mm; report actual stock thickness. Smooth/deburr both faces and all edges; remove cutting microtabs without altering profile. Protect cosmetic face; align grain +Y on both plates. No bends, threads or countersinks. These are requested shop targets, not supplier certifications.

DIV - one flat custom plate

FT02_DIV_124_T1520_FIT_TRIAL

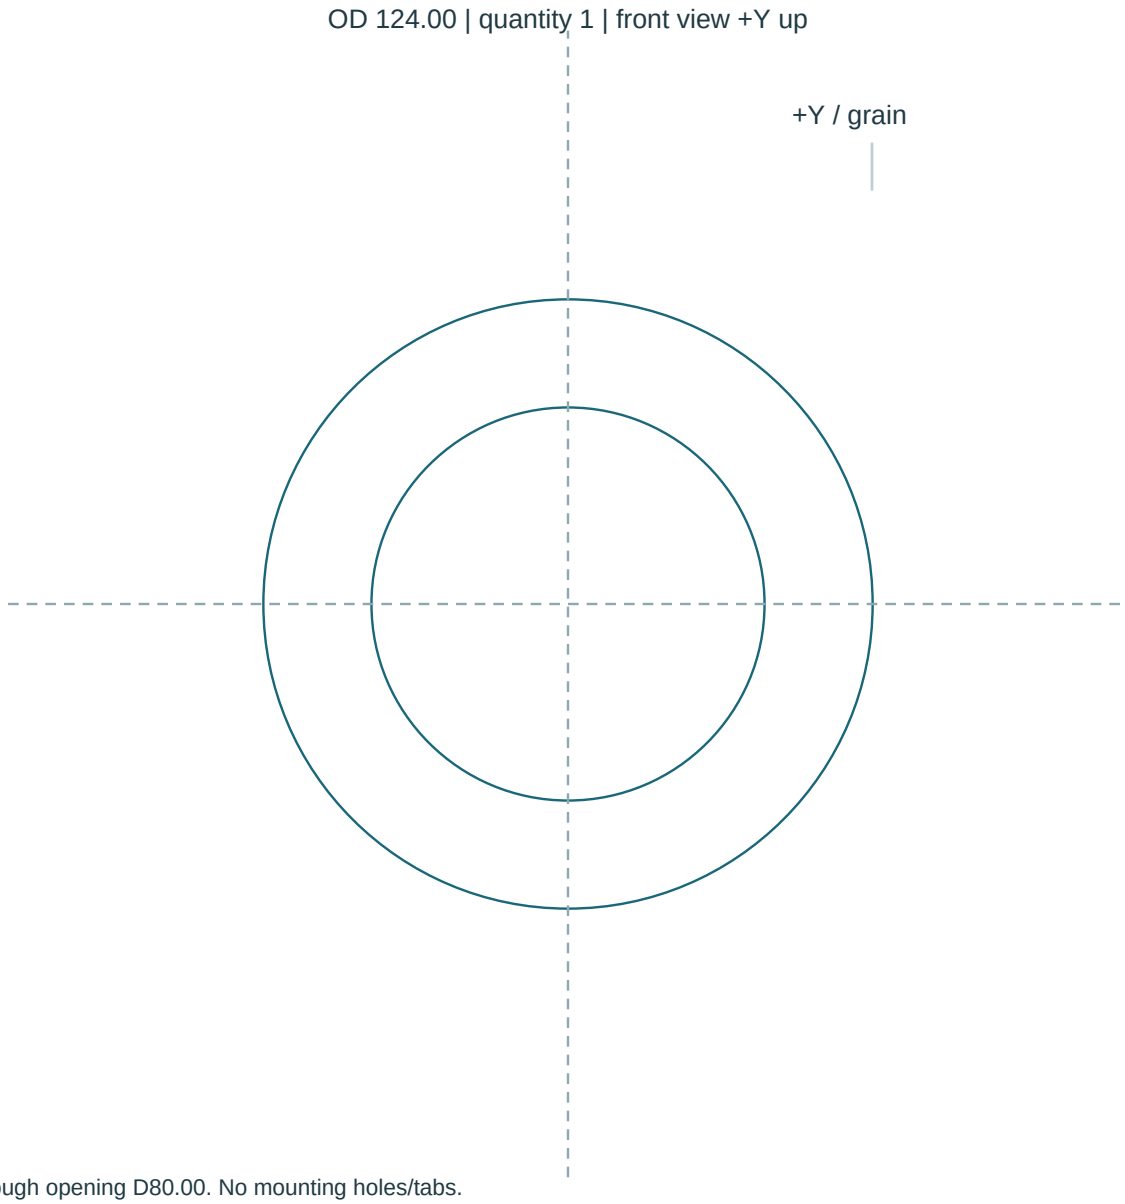

Concentric through opening D80.00. No mounting holes/tabs.

Thickness 1.520 mm. Outer center X=Y=0; back Z=0; front Z=1.520. STEP is one solid. Metal DXF is the finished profile, without customer kerf compensation. All files use mm. View above is 65%, dimensions govern.

Ponoko #4 brushed304:1.52 mm nominal, catalog range1.44-1.64. Brushed one face; actual quote offers linear deburring on MAIN only. DIV has As-cut only. Safe edges, cosmetic face and matching grain still require confirmation/secondary finishing. Requested profile +/-0.13 mm.

Flatness target 0.5 mm; report actual stock thickness. Smooth/deburr both faces and all edges; remove cutting microtabs without altering profile. Protect cosmetic face; align grain +Y on both plates. No bends, threads or countersinks. These are requested shop targets, not supplier certifications.