MAIN / tile 1A / 100%

Print at actual size (100%), not Fit. Check both 100 mm bars on EVERY page. Join matching crosses; adjacent tiles overlap by 20 mm. Cut ONLY the solid outer/aperture profile.

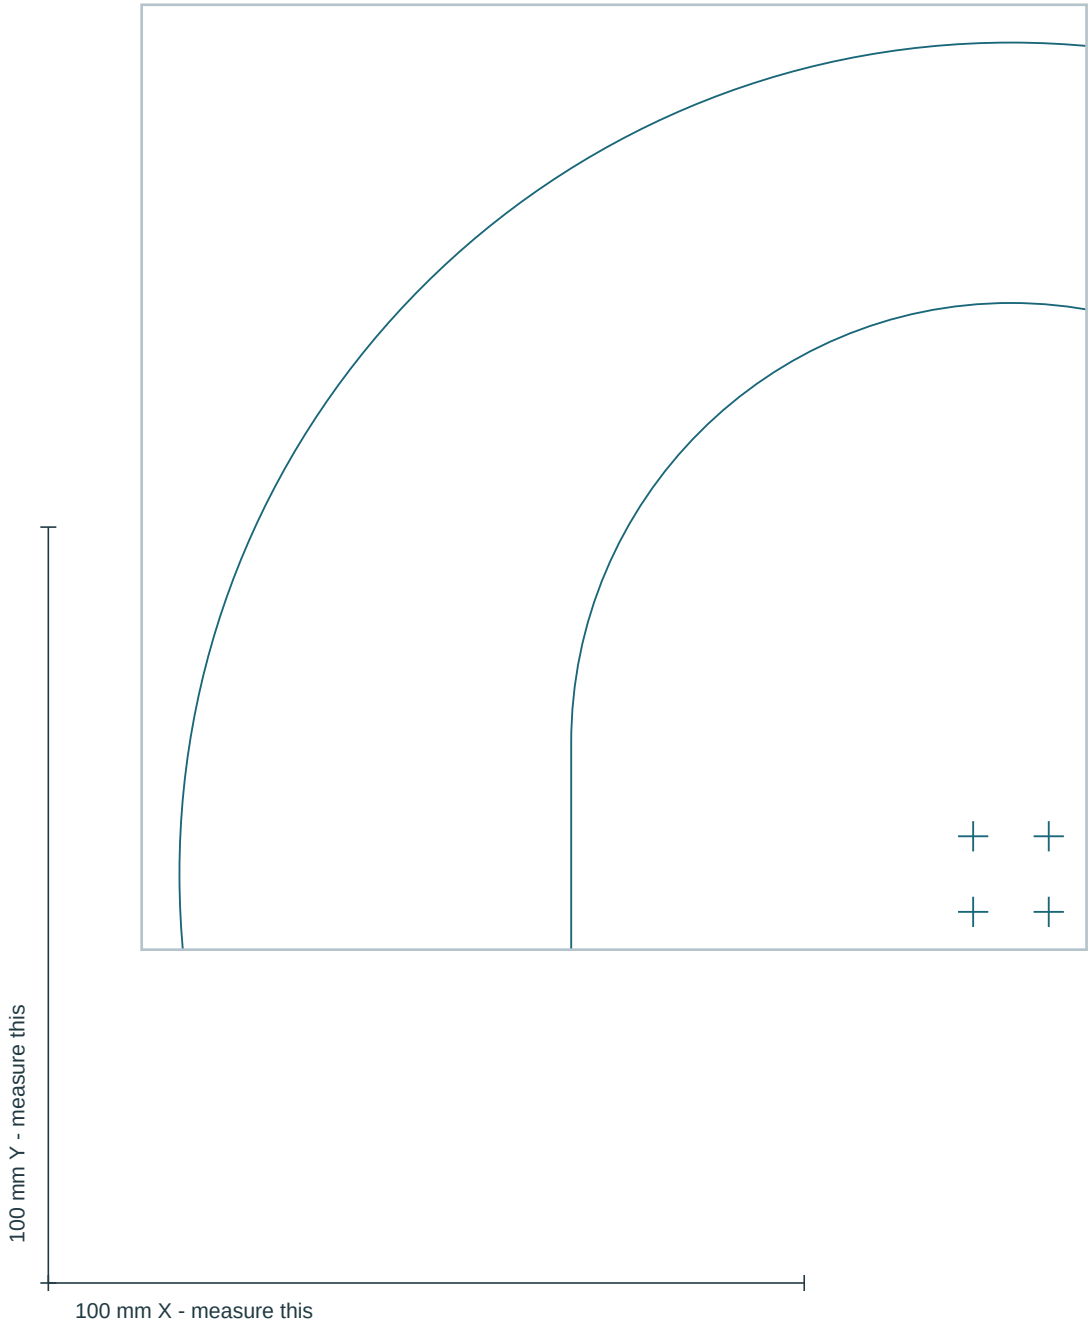

MAIN / tile 1B / 100%

Print at actual size (100%), not Fit. Check both 100 mm bars on EVERY page. Join matching crosses; adjacent tiles overlap by 20 mm. Cut ONLY the solid outer/aperture profile.

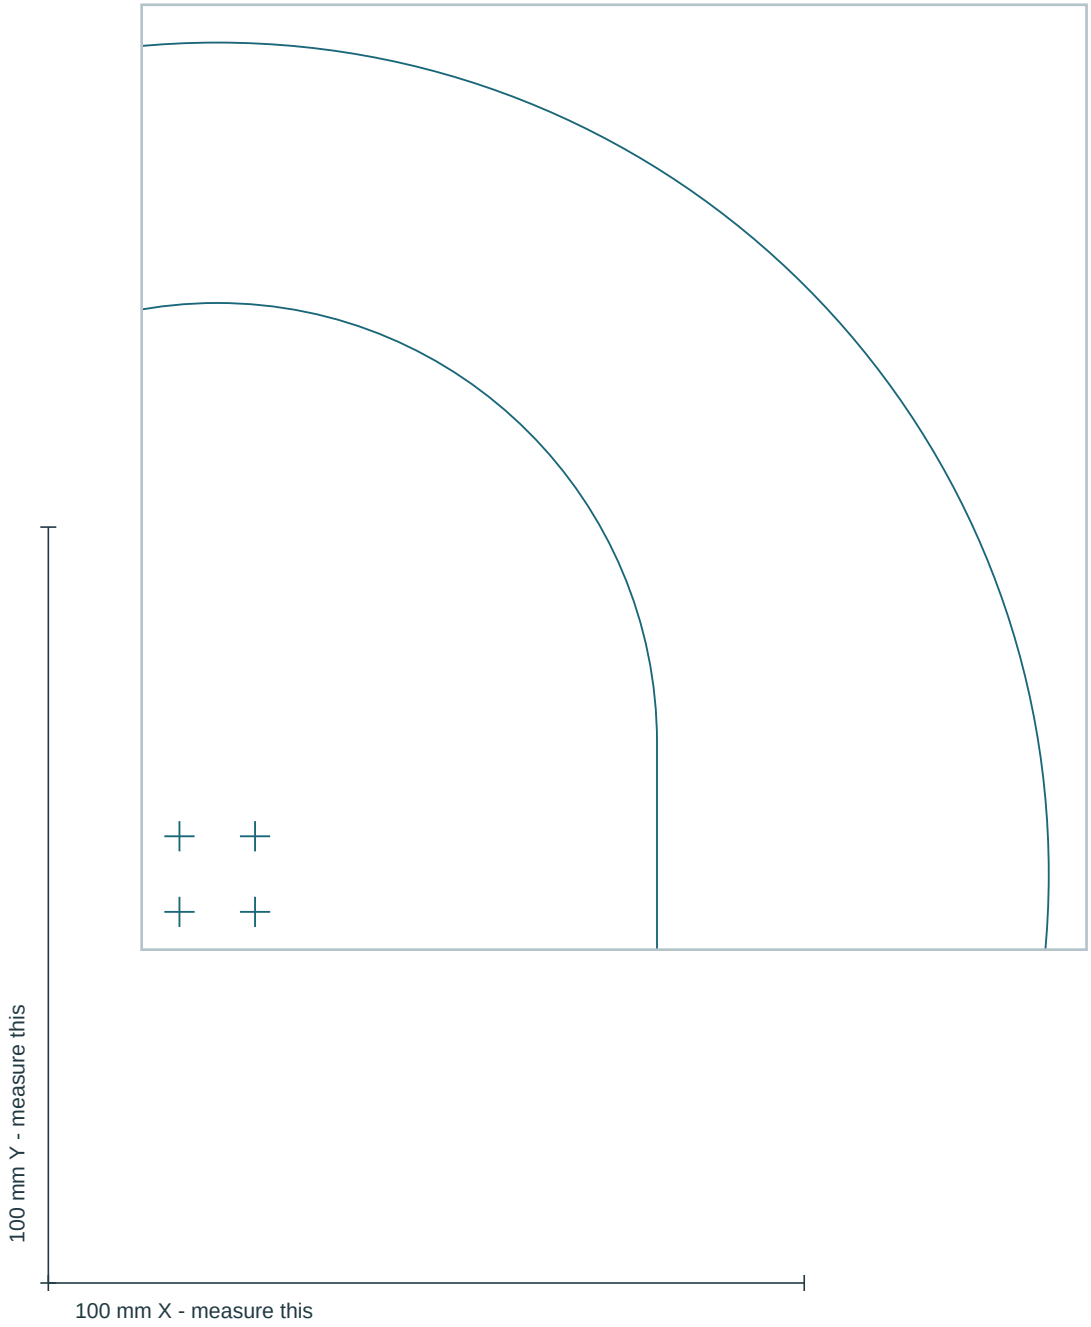

MAIN / tile 2A / 100%

Print at actual size (100%), not Fit. Check both 100 mm bars on EVERY page. Join matching crosses; adjacent tiles overlap by 20 mm. Cut ONLY the solid outer/aperture profile.

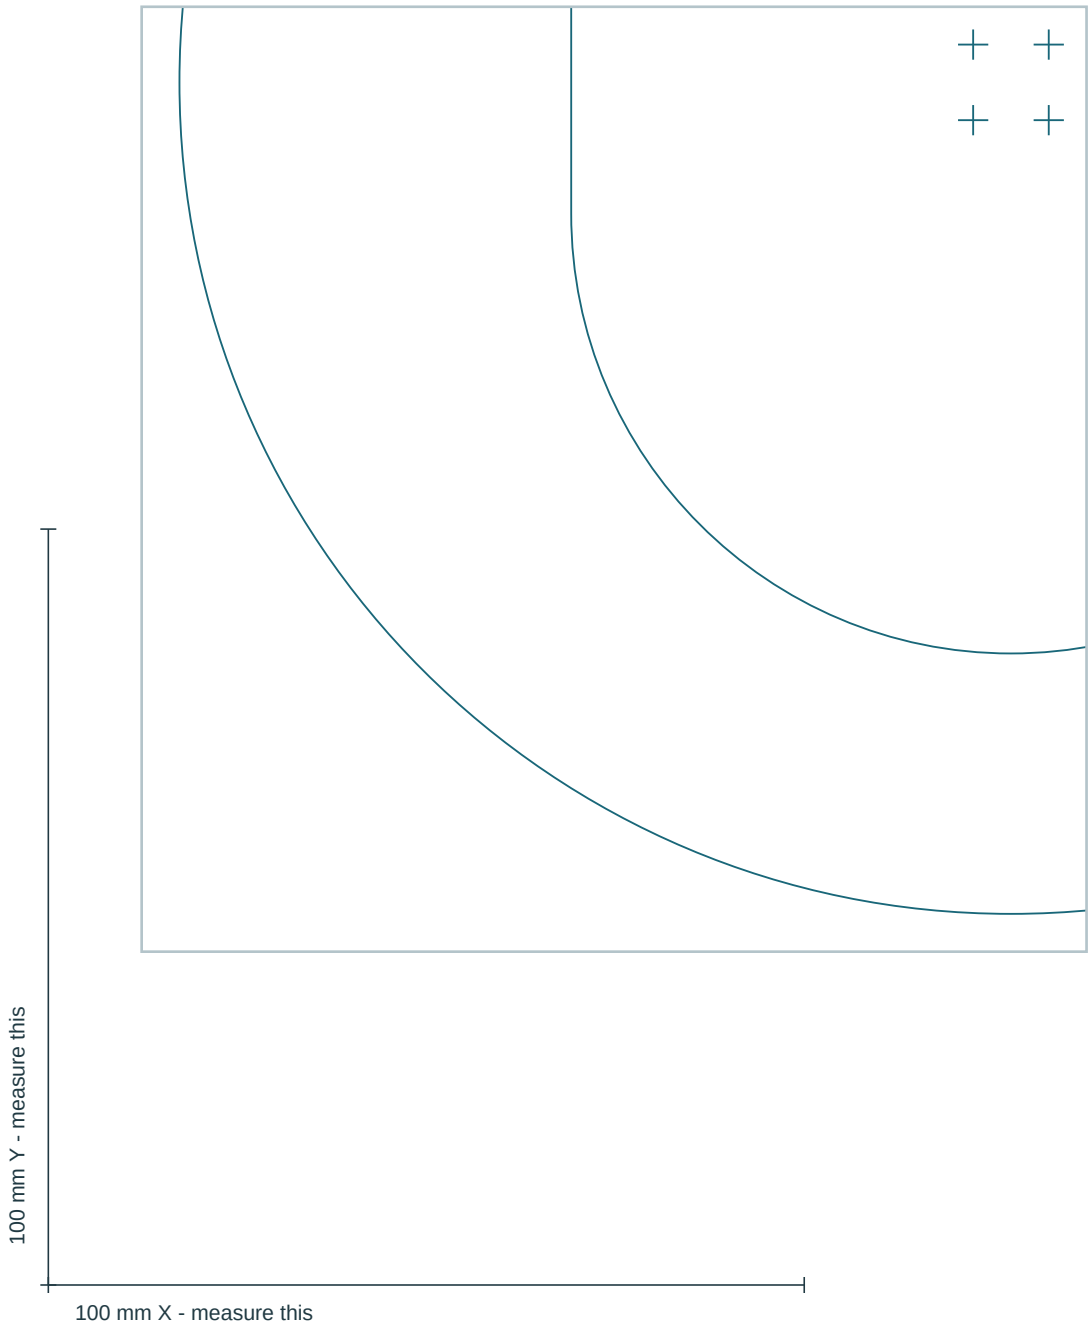

MAIN / tile 2B / 100%

Print at actual size (100%), not Fit. Check both 100 mm bars on EVERY page. Join matching crosses; adjacent tiles overlap by 20 mm. Cut ONLY the solid outer/aperture profile.

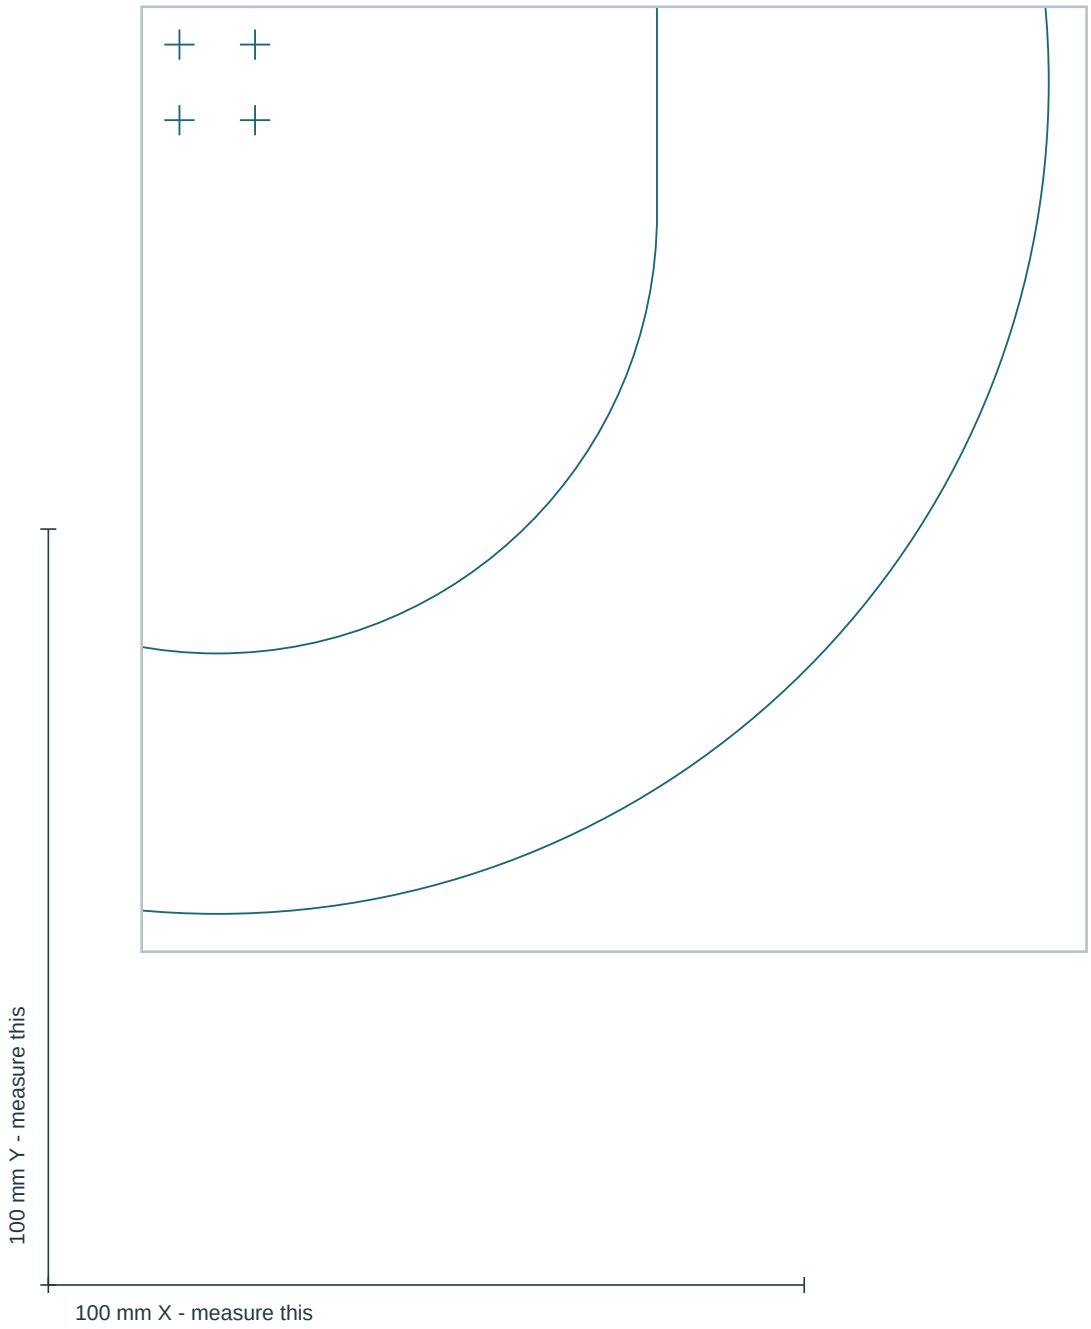

DIVERTER / one sheet / 100%

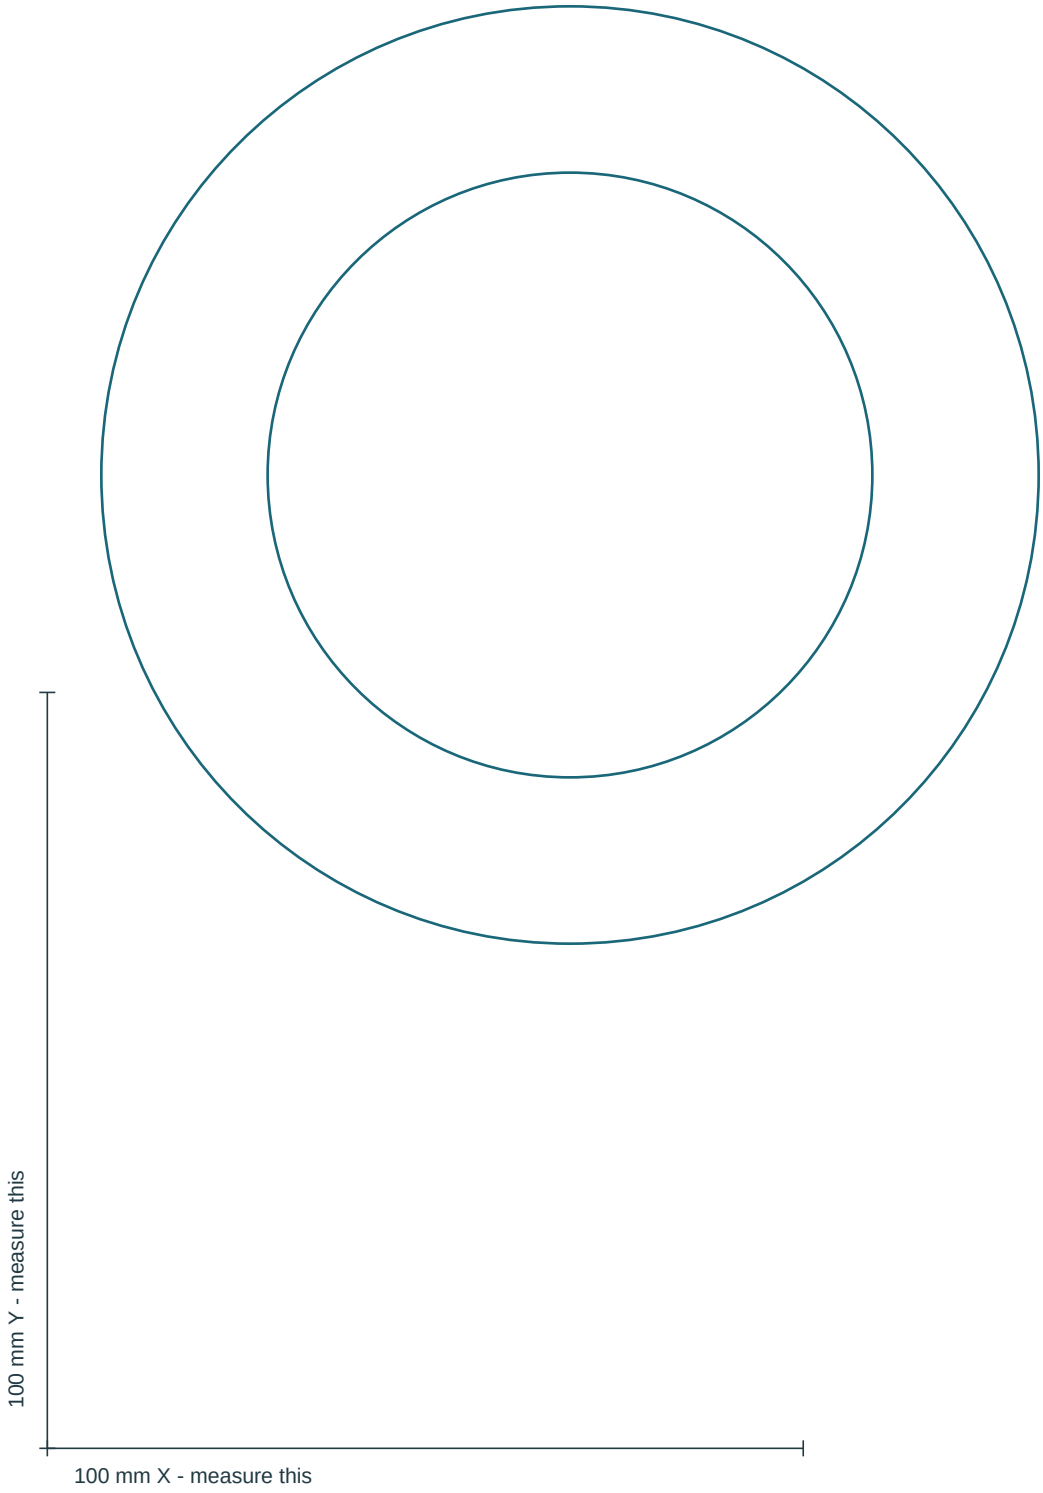

Reference overlay + removable gauges

The main cover/gasket overlay uses the same 4-tile registration as the main profile; use REFERENCE_OVERLAYS_LETTER.pdf for the actual 100% overlay, or use the gauges below. Use from the FRONT, never as a spacer under foam. Nominal widths do not certify actual concentricity.

Main cover D184.15; nominal inner outline 130.35 x 165.10 with assumed R40 corners; foam band 6 mm at edge. These are REFERENCE marks only, not extra cuts in the metal. Main cutting outline D220, one capsule 116.35 x 151.10. Diverter cover nominal D98.425; custom ring D124/80.

MAIN visible border: 17.9250 mm

Cut this card width; compare at four directions.

DIV visible border: 12.7875 mm
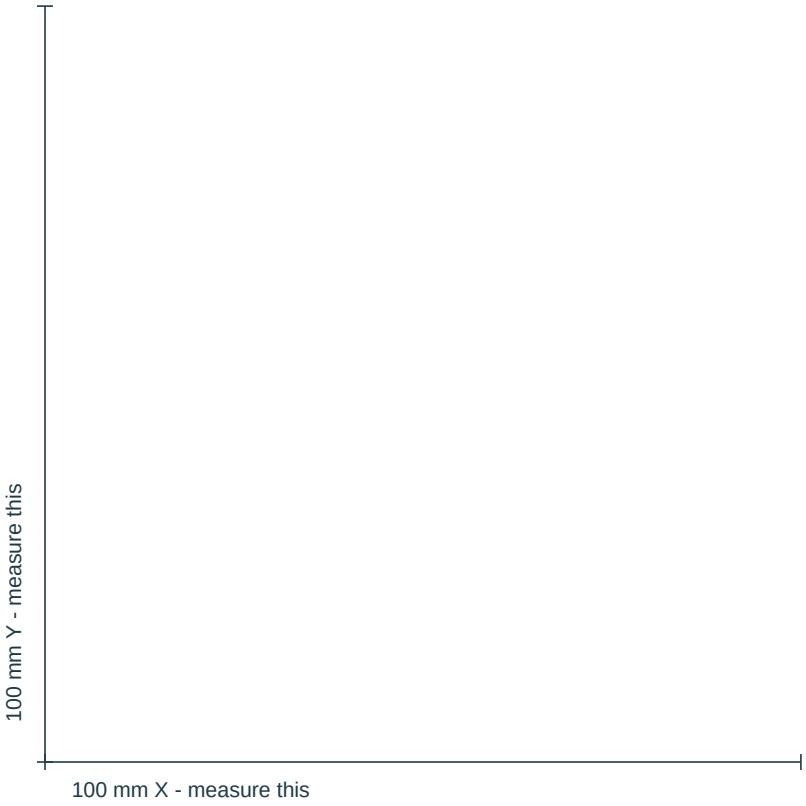
Cut this card width; compare at four directions.