
PROFILE TRIAL / R003 / tile 1-1

DRAFT - NOT FOR FABRICATION. Print at 100% / actual size.

Measure BOTH 100 mm bars before taping. Disable fit-to-page.

Match the C cross and overlap grid; do not cut the stone. UP is +Y.

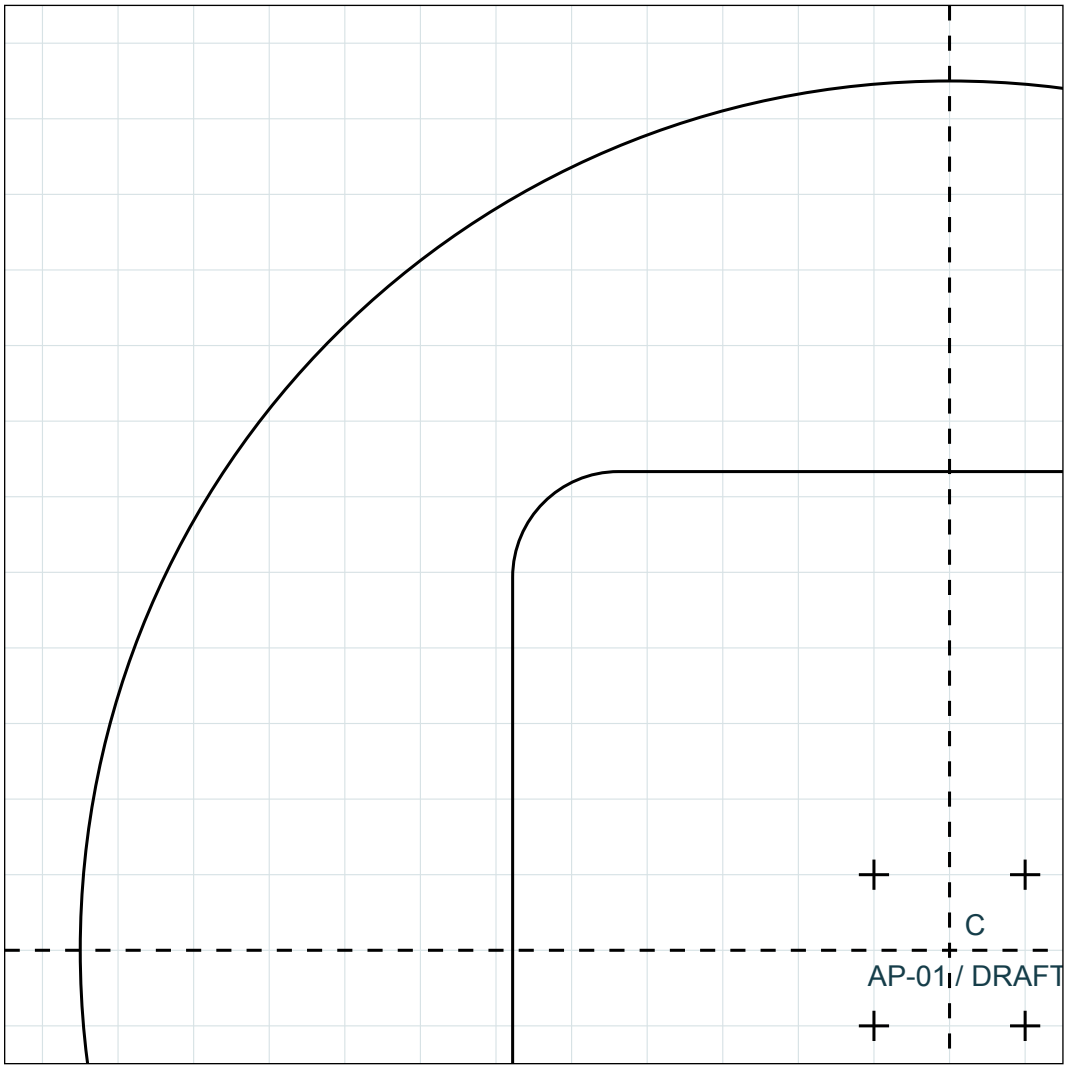

100 mm Y calibration

Local C coordinates: X -125 to 15 mm; Y -15 to 125 mm

100 mm X calibration (measure between end ticks)

Paper/card checks planar registration and coverage only. It cannot validate the depth stack.

Trial plate thickness shown in CAD: 3.175 mm. Use measured spacers / a thickness mockup later.


Prototype materials are not approved for permanent wet-area use. Keep original hardware and drainage.

PROFILE TRIAL / R003 / tile 1-2

DRAFT - NOT FOR FABRICATION. Print at 100% / actual size.

Measure BOTH 100 mm bars before taping. Disable fit-to-page.

Match the C cross and overlap grid; do not cut the stone. UP is +Y.

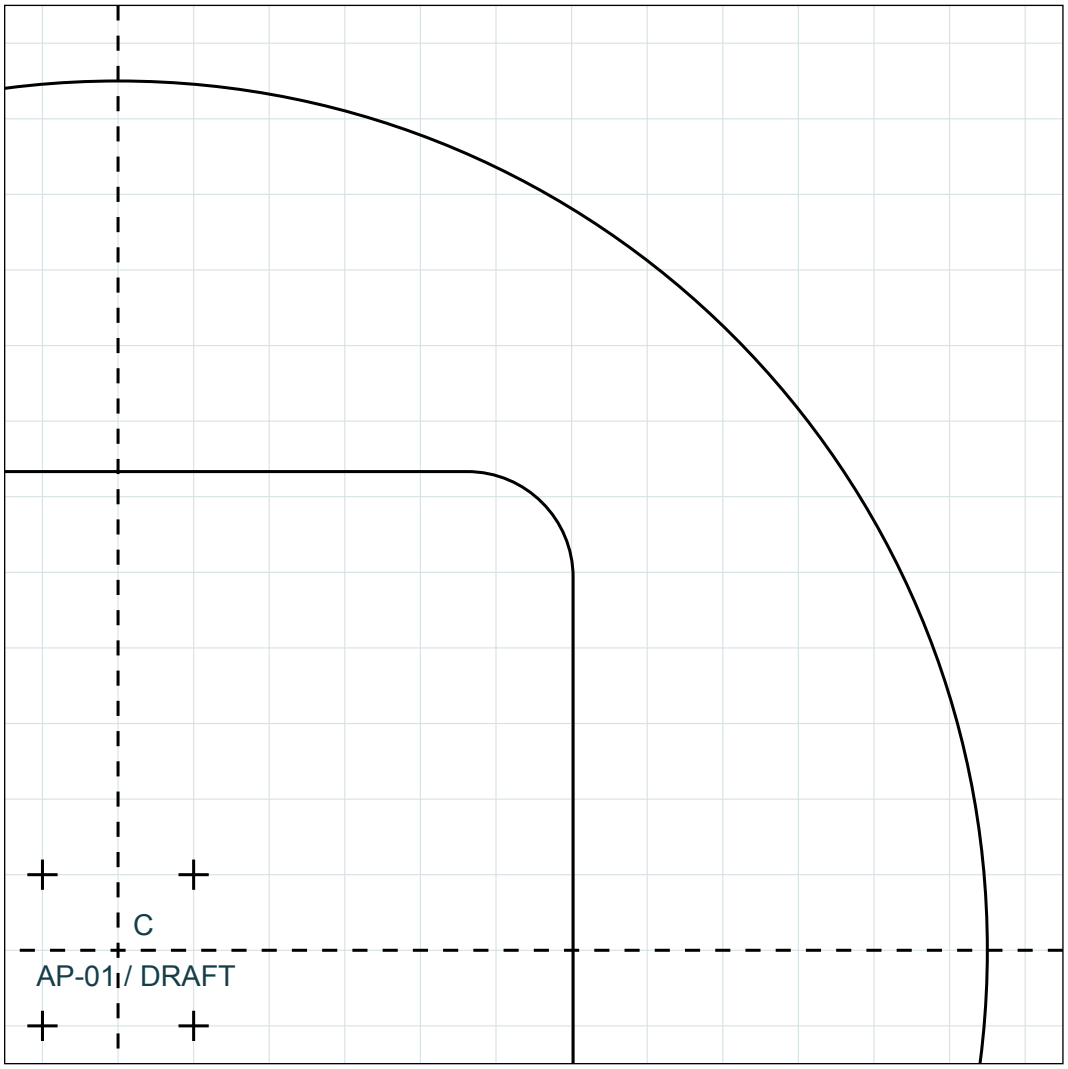

100 mm Y calibration

Local C coordinates: X -15 to 125 mm; Y -15 to 125 mm

100 mm X calibration (measure between end ticks)

Paper/card checks planar registration and coverage only. It cannot validate the depth stack.

Trial plate thickness shown in CAD: 3.175 mm. Use measured spacers / a thickness mockup later.


Prototype materials are not approved for permanent wet-area use. Keep original hardware and drainage.

PROFILE TRIAL / R003 / tile 2-1

DRAFT - NOT FOR FABRICATION. Print at 100% / actual size.

Measure BOTH 100 mm bars before taping. Disable fit-to-page.

Match the C cross and overlap grid; do not cut the stone. UP is +Y.

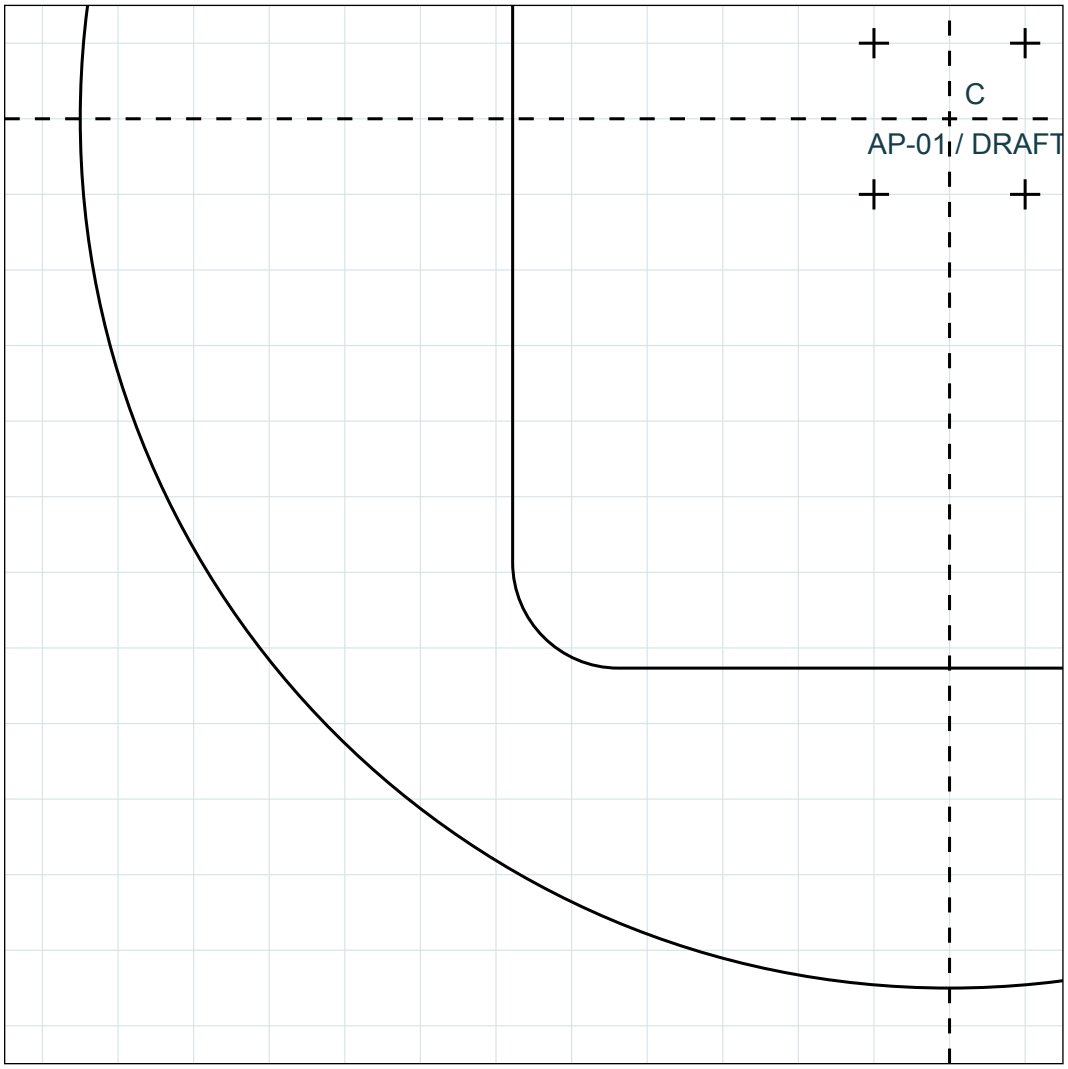

100 mm Y calibration

Local C coordinates: X -125 to 15 mm; Y -125 to 15 mm

100 mm X calibration (measure between end ticks)

Paper/card checks planar registration and coverage only. It cannot validate the depth stack.

Trial plate thickness shown in CAD: 3.175 mm. Use measured spacers / a thickness mockup later.


Prototype materials are not approved for permanent wet-area use. Keep original hardware and drainage.

PROFILE TRIAL / R003 / tile 2-2

DRAFT - NOT FOR FABRICATION. Print at 100% / actual size.

Measure BOTH 100 mm bars before taping. Disable fit-to-page.

Match the C cross and overlap grid; do not cut the stone. UP is +Y.

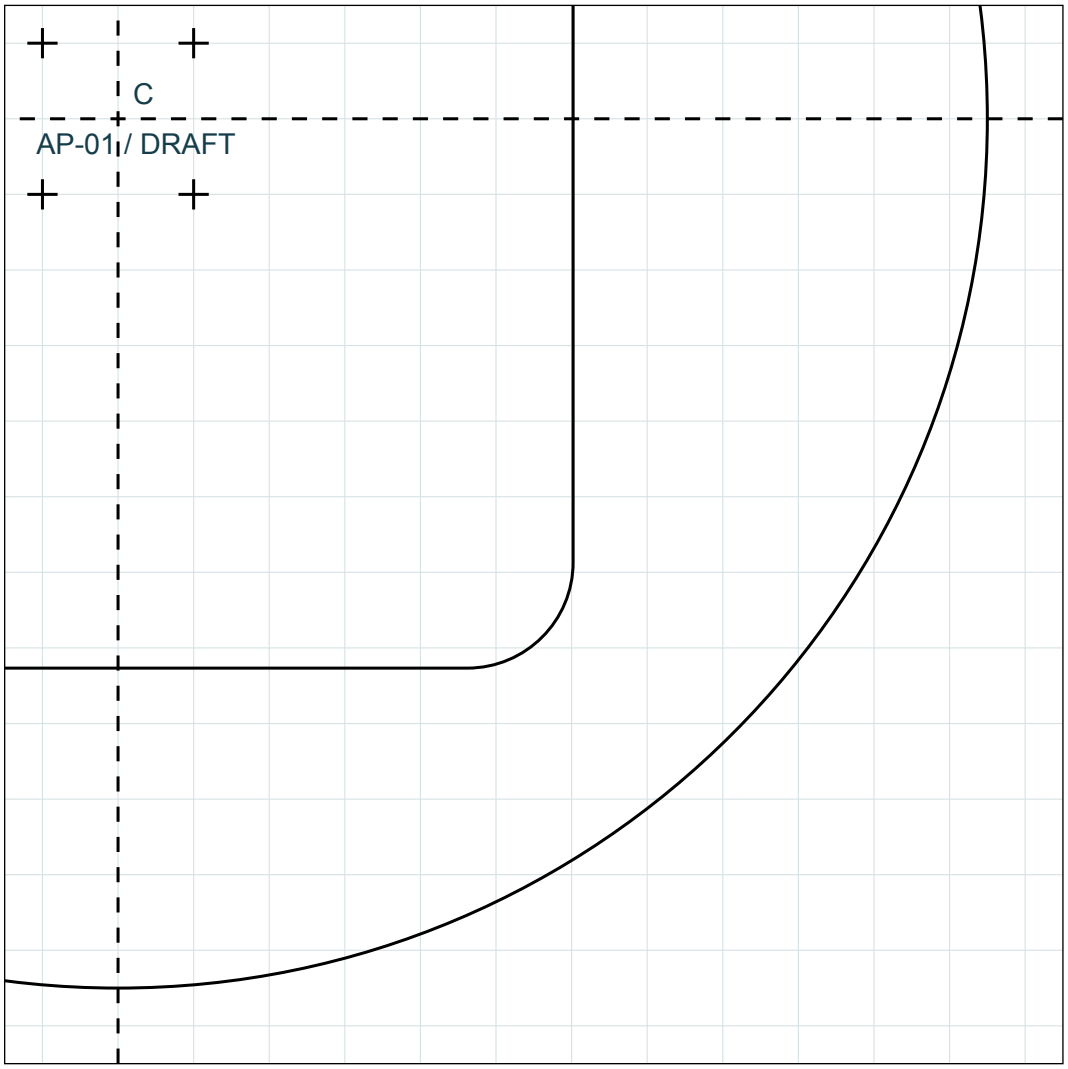

100 mm Y calibration

Local C coordinates: X -15 to 125 mm; Y -125 to 15 mm

100 mm X calibration (measure between end ticks)

Paper/card checks planar registration and coverage only. It cannot validate the depth stack.

Trial plate thickness shown in CAD: 3.175 mm. Use measured spacers / a thickness mockup later.

Prototype materials are not approved for permanent wet-area use. Keep original hardware and drainage.