


PICTURE & SPECIFICATION

www.NZCAMERAHIRE.CO.NZ

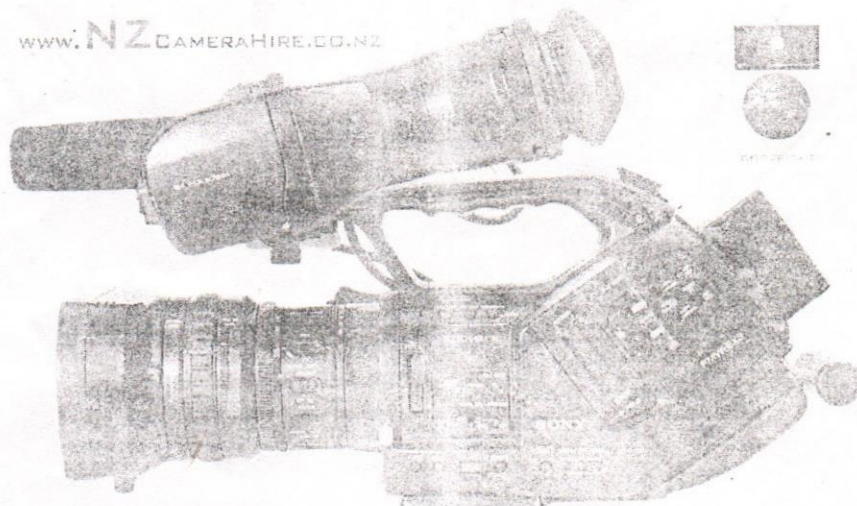

SONY XDCAM EX-3 CineAlta

Full 1920 x 1080 HD,
SxS PRO Memory Card Camera
with interchangeable lens

CAMERA SPECIFICATIONS


- Pickup device: 3-chip 1/2 - inch type Exmor CMOS
- Effective picture elements: 1920(H) x 1080(V), 16:9 Optical system: F1.6 prism system
- Built-in filters: ND filter OFF: Clear, 1: 1/8ND, 2: 1/64ND Sensitivity: (2000 lx, 89.9% reflectance) F10 (typical)(1920 x 1080/50i mode)
- Minimum illumination: 0.14 lx (typical) (1920 x 1080/50i mode, F1.9, +18 dB gain, with 64-frame accumulation)
- S/N ratio: 54 dB (Y)(typical)
- Horizontal resolution: 1000 TV lines or more (1920 x 1080i mode)
- Shutter speed: 1/33 to 1/2000 sec.
- Shutter angle: 180, 90, 45, 22.5, 11.25 degrees
- Slow Shutter (SLS): 2-, 3-, 4-, 5-, 6-, 7-, 8-, 16-, 32-, and 64-frame accumulation
- Slow & Quick Motion function: (over and under-cranking)
- 720P - selectable from 1 to 60 fps as recording frame rate
- 1080P - selectable from 1 to 30 fps as recording frame rate

SIGNAL INPUTS / OUTPUTS

- OUT: Composite - BNC, S-Video, Audio - RCA (Ch-1, Ch-2), Timecode - BNC, Component - Mini D, HD / SD-SDI - BNC, 2.0
- IN: Timecode - BNC, Genlock - BNC, i.Link 4 pin Firewire, USB 2.0, D

KIT INCLUDES:

- 3x 32GB SxS Cards = 6 hours recording time,
- 3x BP-U60(approx. 4 hrs) 1x BP-U30


BARUN KUMAR SARKER
Instr Lt Cdr BN
Public Relation Officer
Directorate of Naval Intelligence
Naval Headquarters

- (approx. 2.5 hrs) Lithium-ion Batteries
- Battery charger / Power supply
- Sachtler Fluid Head Video18 Tripod
- Shotgun Microphone
- Wet weather cover
- Laptop with SxS card reader slot or
USB Memory Card Reader / Writer
- (extra 1 TB external hard drives available for \$10 p/day)

RECORDING FRAME RATE - PAL

- HQ mode: 1920x1080/50i, 25P, 1280x720/50P, 25P SP
mode: 1440 x 1080/50i
- Native 24P recording
- HQ mode: 100 min. with two 16 GB memory cards
- SP mode: 140 min. with two 16 GB memory car

LENS SPECIFICATIONS

- ½ - inch EX mount
- Zoom ratio: 14x (optical), servo/manual selectable
- Focal length: $f = 5.8$ to 81.2 mm
(equivalent to 31.4 to 439 mm on 35 mm lens)
- Iris: F1.9 to F16 and Close, servo/manual selectable


 BARUN KUMAR SARKER
 Instr Lt Cdr BN
 Public Relation Officer
 Directorate of Naval Intelligence
 Naval Headquarters

4/3/2019

Camera - videoroom005@gmail.com - Gmail

Gmail

Search mail

Camera Inbox x



Soongi Productions

to me

Camera: Sony Cinealta XDCAM EX PMW-EX3-Camcorder with kid lenses

Extra Battery: BP-U60-2 pecs.

Charger: ACC-U60

Sound Boom: rode microphone ntg-2

Wind Shield: RODE Blimp – 1pecs.

Boom Cable: 25 feet

Boom Sick: RODE Professional Boompole-3.3m

Lapel: Sennheiser EW 122P G3-B Portable Wireless Lapel Mic- 1 pair

Tripod: libec LX10 tripod

Memory Card Adaptor: MEAD-MS01-2pecs

Memory Card: SanDisk Extreme Pro UHS-II 32GB-250mbps – 2pecs

Reply

Forward

No 1
of
Star


BARUN KUMAR SARKER
Instr Lt Cdr BN
Public Relation Officer
Directorate of Naval Intelligence
Naval Headquarters