


Data sheet

Linear Actuators JC35D



www.jiecang.com

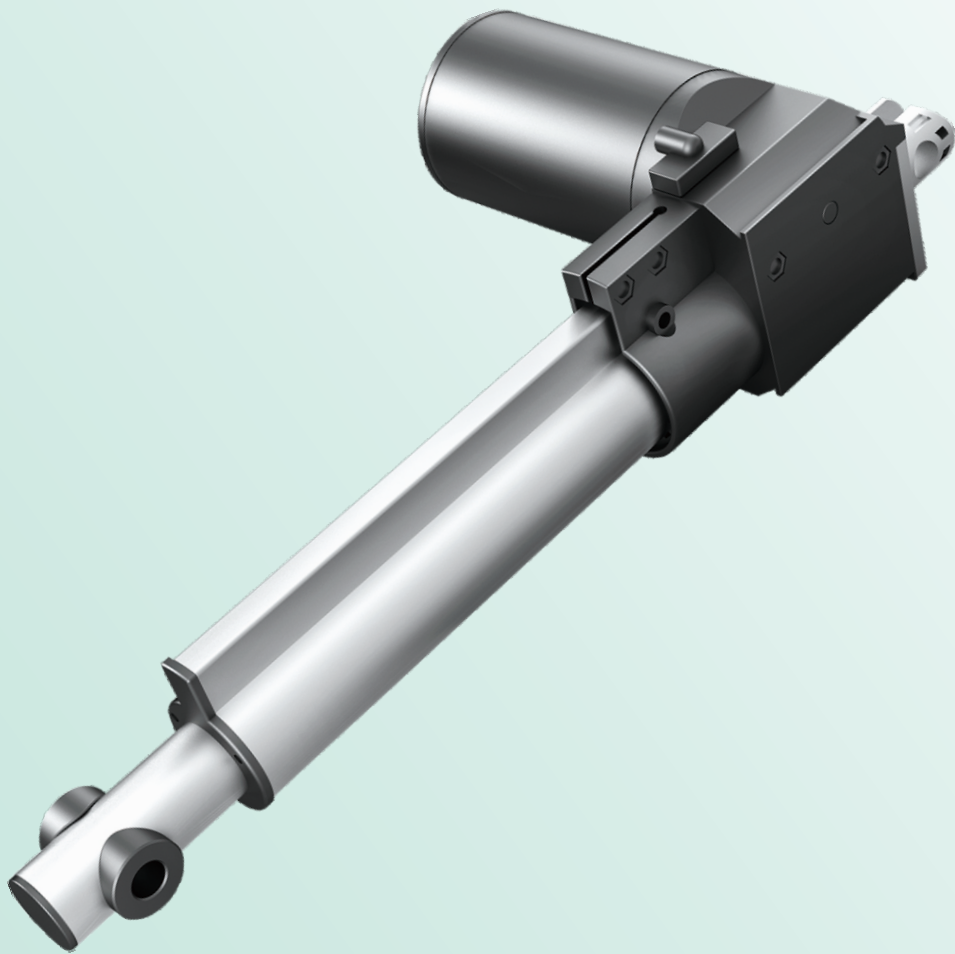

JIECANG
LINEAR MOTION

Data sheet

JC35D

Features

- 24V DC permanent magnet motor
- Thrust up to 6000 N in push and up to 4000 N in pull
- Color: grey or black
- Standard protection class: IP43
- Aluminium-Alloy outer tube and inner tube, beautiful and corrosion resistant
- Low noise; The average noise level is lower than 48dB (ambient noise is less than 40dB).
- Built-in electronic limit switches
- High-strength front and back
- Certificate : CE, UL60601-1, IEC60601-1



Options

- Only push no pull function: Optional
- Hall sensor feedback: Optional
- Reed switch feedback: Optional
- Without Relay system: Optional

Usage

- Ambient temperature: +5 ° to +40 °
- Duty cycle: Max 10% or 2 minutes continues use followed by 18 minutes not in use
- Matching control box: JCB35E, JCB35Q, JCB35T, JCB35R


Technical specifications

Spindle pitch mm	Max. load push (N)	Max. load pull (N)	Self-lock (N)	Typical speed Unloaded (mm)	Typical speed full load (mm)	Typical Amp full load (A)
4	6000	4000	6000	4.5	3	4
5	4000	4000	4000	6	4	3.3
7.5	3000	3000	3000	9	6	3.3
5	2000	2000	2000	13	9	4
7.5	1500	1500	1500	20	13	4
12	1000	1000	1000	30	21	3.8
16	750	750	750	42	26	4.5


Comments to table

- The above measures are made in connection with 24V DC stabilized voltage supply.
- JIECANG control boxes are designed so that they will short-circuit the motor terminals (poles) of the actuator(s) when the actuator(s) are not running. This solution gives the actuator(s) a higher self-locking ability. If the actuator(s) are not connected to a JIECANG control box, the terminals of the motor must be short-circuited to achieve the self-locking ability of the actuator.
- When the load in push is above 6000N, the max. stroke length is 400mm;
When the load in push is above 4000N, the max. stroke length is 500mm;
When the load in push is above 3000N, the max. stroke length is 600mm;
When the load in push is above 2000N, the max. stroke length is 650mm;
When the load in push is above 1500N, the max. stroke length is 650mm;
When the load in push is above 1000N, the max. stroke length is 650mm;
When the load in push is above 750N, the max. stroke length is 700mm;

Dimension

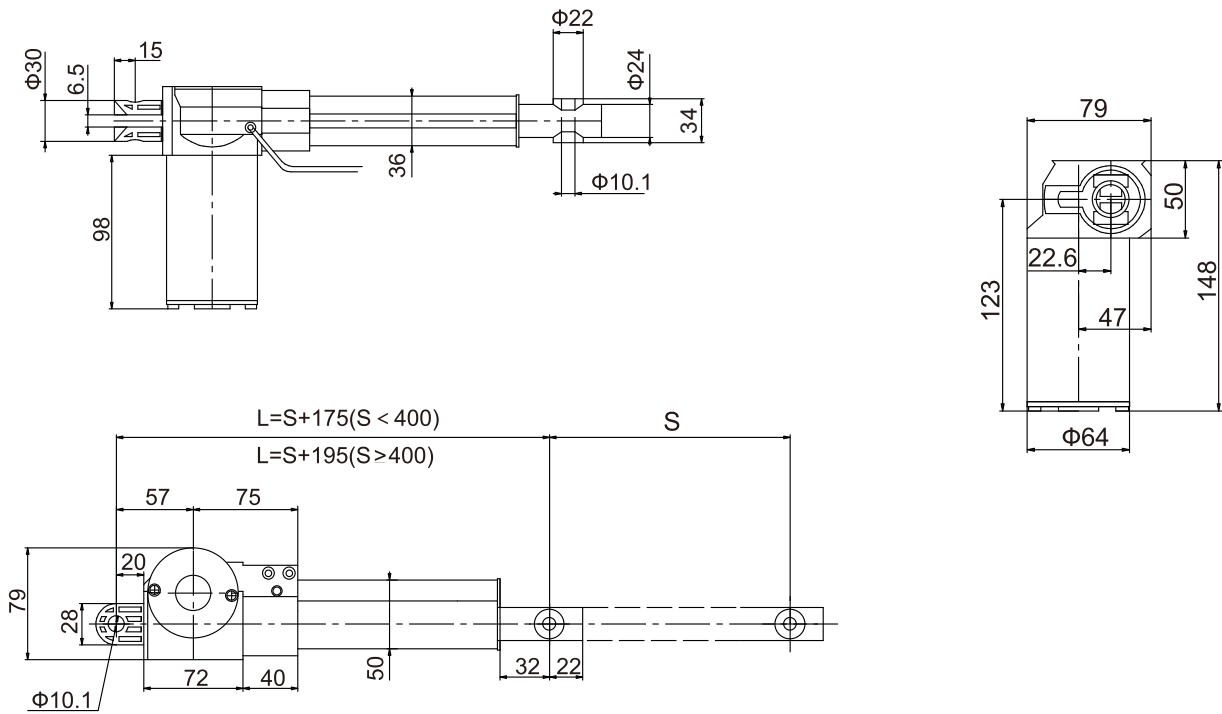

JC35D mounting with JCB35Q

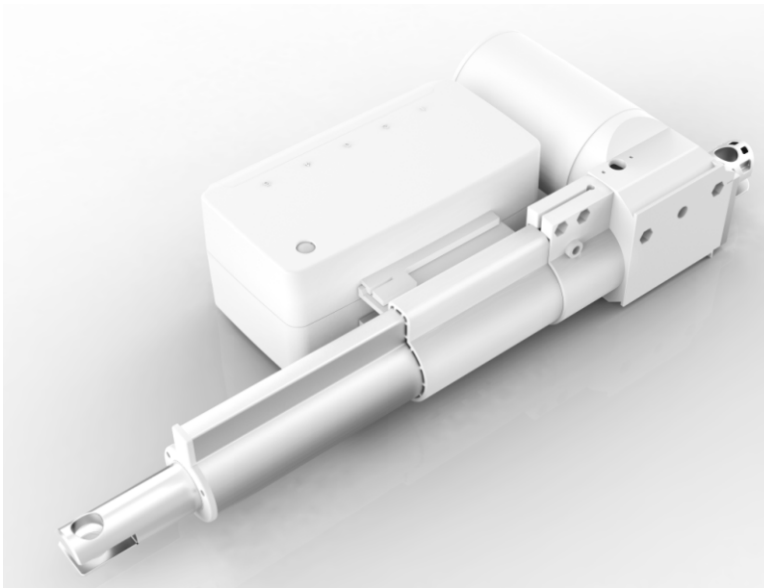


Installation dimensions

$$L = S + 175 \quad (S < 400)$$

$$L = S + 195 \quad (S \geq 400)$$

Ordering Key

JC35D - Y - 6 - 3 - 24 - 100/275 - V - G - D - Z - K - 0 - 10 - 2D0

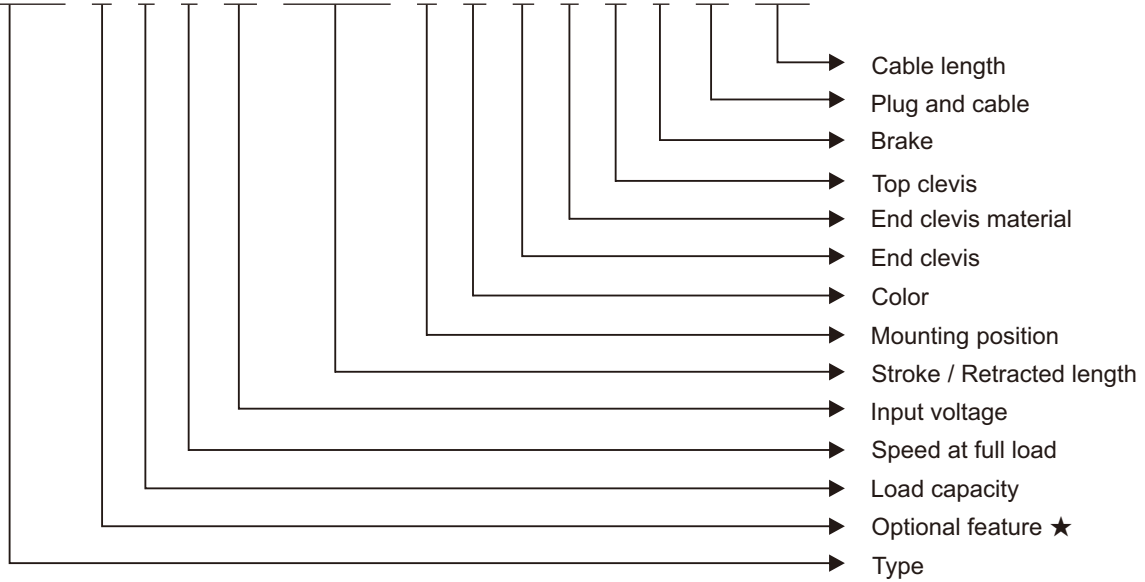

- ★
- 0 Standard
 - Y Hall sensor feedback
 - R Reed Switch feedback
 - P Only push no pull