ADDITIONAL INFORMATION
1. Blasting may take place HJ. Check current NOTAM. MNT CTAF.
2. Bird hazard exists at sunrise and sunset.
3. Fruit bat hazard exists at sunrise and sunset on RWY and APCH.

CHARTS RELATED TO THE AERODROME
1. WAC 3110.
2. Also refer to AIP Departure and Approach Procedures.

GRUYERE **ELEV 1542**

AVFAX CODE 6406

WA		UTC +8	YGRM
280203S	1234851E	VAR 2 DEG E	CERT

AD OPR Gruyere Management Pty Ltd, Level 4, 235 St Georges Terrace, Perth, WA, 6000.
Email: gjv.aerodrome@gruyerejv.com. PH 08 6187 4148: H24 0427 389 326.

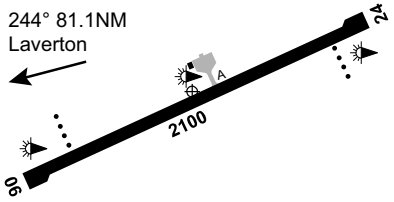

REMARKS
PPR FM AD OPR.

HANDLING SERVICES AND FACILITIES
JET A1 AVBL. Fixed facility. PPR from AD OPR.

AERODROME OBSTACLES
Lit mast HGT 1,562FT AMSL BRG 278 DEG MAG, 222M FM ARP.

METEOROLOGICAL INFORMATION PROVIDED
AWIS FREQ: 133.45MHz (requires three one-second pulses to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS
06/24 063 69a PCR 250/F/B/Y/T WID 30 RWS 150

AERODROME AND APPROACH LIGHTING

RWY 06/24	LIRL	AFRU+PAL 125.85		SDBY PWR AVBL
RWY 06/24	PAPI(1)	AFRU+PAL 125.85	3.0 DEG48.5FT	SDBY PWR AVBL
RWY 06/24	PTBL(2)			BY PRIOR ARRANGEMENT

(1) Left side only.
(2) 60MIN PN.
RWY 06/24 edge LGT spacing: 60M.

OTHER LIGHTING
Secondary PWR switchover time: 15MIN - manually activated.

ATS AND AERODROME COMMUNICATION FACILITIES
FIA MELBOURNE CENTRE 118.4

LOCAL TRAFFIC REGULATIONS
1. RWY 06/24: All fixed wing ACFT ABV 20,000KG must make MAX RAD turns at MNM speed at all turning nodes to avoid SFC damage.
2. All ACFT to follow APN markings.
3. All jet ACFT to use idle PWR for movements on the APN with the exception of breakaway thrust to initiate taxi. ACFT that cannot comply with this restriction must advise the AD OPR prior to DEP.
4. PRKG by prior arrangement with AD OPR.

CTAF - AFRU 125.85

ADDITIONAL INFORMATION

1. Blasting HJ DLY BRG 028 DEG MAG 3.6NM FM ARP. Dust plumes may occur following blasting, ACFT are requested to avoid flying over mine pit.
2. UAV OPR HJ daily BRG 037DEG MAG 3.7NM FM ARP. SFC to 400FT AGL.

CHARTS RELATED TO THE AERODROME

1. WAC 3352.
2. Also refer to AIP Departure and Approach Procedures.

GUDAI-DARRI MINE — ELEV 1473

AVFAX CODE 6838

WA		UTC +8	YKDD
223019S	1190434E	VAR 1 DEG E	CERT

AD OPR Mount Bruce Mining Pty Ltd, Level 18, 152-158 St Georges Terrace, Perth, WA, 6000. Email: gudaidarri.airport@amsaustralia.com. PH 08 9327 2000. ARO AH 0428 868 947.



REMARKS

1. Restricted OPS: 24 HR PPR FM AD OPR (AD MGR).
2. All OPS – Advise AD OPR at least 20 MINS prior ETA on 127.925. CS “Gudai-Darri Base”.

HANDLING SERVICES AND FACILITIES

Viva Energy Aviation: 2230-1000 UTC DLY, AH with 2HR PN. PH 0448 680 573. JET A1 - Fuel2Sky Carnet Cards, V or MC.
Marshalling, parking allocation and ground handling services by prior arrangement with AD OPR.

PASSENGER FACILITIES

WC, LG, RF, Telstra 4G mobile reception.

APRONS AND TAXIWAYS

TWY A, Code C WID 18M bitumen seal.

AERODROME OBSTACLES

There are a large number of obstacles in the VCY of the AD. CTC ARO for details.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT C, METAR/SPECI.
2. AWIS FREQ 133.350 (requires three one-second pulses to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

12/30	115	72a	PCR 450/F/B/X/T Sealed.	WID 45	RWS 300

AERODROME AND APPROACH LIGHTING

RWY 12/30	LIRL(3)	PAL+AA 119.6		
RWY 12/30	PAPI(1)	PAL+AA 119.6	3.0 DEG54FT	SDBY PWR AVBL
RWY 12/30	PTBL(2)			BY PRIOR ARRANGEMENT

(1) Left side. PAL+AA requires three three-second pulses to activate.
(2) EMERG (mercy flights) only. 2HR PN.
(3) PAL+AA requires three three-second pulses to activate.
RWY edge light spacing: 59.5M.

OTHER LIGHTING

1. SDBY PWR switchover time: 20 SEC.
2. TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	MELBOURNE CENTRE	128.15 Circuit area

Information may be continued on the next page: PTO