ADDITIONAL INFORMATION

1. Bird hazard exists.
2. Kangaroos may be on RWY - pilots should conduct a flyover before landing.

CHARTS RELATED TO THE AERODROME

WAC 3469.

MCARTHUR RIVER MINE — ELEV 136

AVFAX CODE 8020



NT UTC +9:30 YMHU
162636S 1360436E VAR 4 DEG E CERT
AD OPR McArthur River Mining Pty Ltd, PO Box 36821, Winnellie, NT, 0821. ARO 08 8975 8138: 0447 785 408: Fax 8975 8143. Fax 08 8975 8156.

REMARKS

1. Restricted OPS: 24HR PPR FM AD OPR.
2. Basic Aviation Restrict Standard (BARS) accredited and McArthur River Mine contracted airlines only - aeromedical exempted.
3. This AD is a Security Controlled Airport.
4. AD OPR CTC times daily BTN 2030-1030 UTC. Other times EMERG call-out only.
5. AD Charges may apply. Landing fees are payable by EFTPOS only.

HANDLING SERVICES AND FACILITIES

JET A1 AVBL. Contact ARO. Payment is by EFTPOS only (no carnet or other membership cards accepted).

AERODROME OBSTACLES

1. Cranes 278FT AMSL WI 300M RAD of conveyor antenna (marked and lit) BRG 048 MAG 1NM FM ARP.
2. Mobile machinery 176FT AGL BRG 049 MAG 1.3NM FM ARP infringes OLS by 28FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT D, METAR/SPECI.
2. AWIS Phone 08 7922 2510 - Report faults to AD OPR.
3. AWIS FREQ 133.250 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

06/24	065	82a	PCR 350/F/D/1.10 MPa/T		WID 30	RWS 150

AERODROME AND APPROACH LIGHTING

RWY 06/24	LIRL	PAL+AA 120.65		SDBY PWR AVBL
RWY 06/24	PAPI	PAL+AA 120.65	3.0 DEG49FT	SDBY PWR AVBL

1. PPR for lighting from AD OPR
2. PAL operates for 60 MIN period.
3. HJ selection of PAL will activate PAPI, ABN and illuminate WDI.
4. RWY LGT operate only from twilight or in lower light conditions.
5. The last 10 MIN of the 60 MIN lighting period is signalled by illuminated WDI flashing.
6. RWY edge LGT spacing: RWY 06/24: 60M.

OTHER LIGHTING

ABN ALTN 6 WG Operation when lighting on.

1. SDBY PWR AVBL on 30 SEC response.
2. TWY LGT: Operation when lighting on.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA BRISBANE CENTRE 128.5 Circuit Area

LOCAL TRAFFIC REGULATIONS

1. Parking limited for ACFT ABV 5,700 KG MTOW.
2. ACFT ABV 5,700KG MTOW must carry out 180DEG turns at RWY ends only.

Information may be continued on the next page: PTO

FLIGHT PROCEDURES

Right hand circuits RQ when OPR on RWY 06.

CTAF - AFRU 126.7

ADDITIONAL INFORMATION

1. Blasting D242 SFC - 650FT AMSL. 0100-0200 UTC DLY, 0500-0600 UTC DLY or as amended by NOTAM.
2. Bird Hazard exists mainly Australian bustard and pink crested galah.
3. Public airport YBRL (Borroloola) APRX 22NM NE of YMHU.

CHARTS RELATED TO THE AERODROME

1. WAC 3221.
2. Also refer to AIP Departure and Approach Procedures.

MEEKATHARRA ELEV 1696

AVFAX CODE 6601

WA		UTC +8	YMEK
263642S	1183252E	VAR 0 DEG E	CERT

AD OPR Shire of Meekatharra, PO Box 129, Meekatharra, WA, 6642. Email: CEO nathan.cain@meekatharra.wa.gov.au. ARO Email: mike.cuthbertson@meekatharra.wa.gov.au PH H24 0417 968 115. Council PH BH 08 9980 0600.

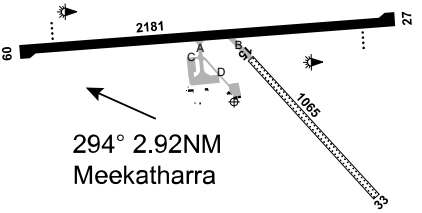

REMARKS

1. AD charges: All ACFT, non VH registered ACFT are to pay LDG fees to the AD Manager via EFTPOS on arrival.
2. This AD is a Security Controlled Airport.
3. Only Telstra mobile coverage AVBL.
4. AD is an alcohol free zone. Alcohol is not permitted to be brought onto or consumed at the AD.

HANDLING SERVICES AND FACILITIES

AIR BP: 2300-1000 UTC JO, JF HO/OR, AH 20 MIN PN (JET A1 underwing only), AH call-out fee applies. Phone 0417 968 115. JET A1 underwing only.
Cardswipe self serve bowser H24 AVGAS and JET A1 overwing.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT C, METAR/SPECI.
2. AWIS Phone 08 6216 2626 - Report faults to BoM.
3. AWIS FREQ 120.45 (1 SEC pulse to ACT, INFO will broadcast for three cycles) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

09/27	085	72a	PCR 190/F/A/Y/T Sealed	WID 30	RWS 150
15/33	139	35c	5700 kg/0.45 MPa Gravel	WID 30	RWS 90

AERODROME AND APPROACH LIGHTING

RWY 09/27	LIRL(1)	AFRU+PAL 126.55		SDBY PWR AVBL
RWY 09/27	PAPI	AFRU+PAL 126.55	3.0 DEG48FT	SDBY PWR AVBL

(1) PAL activates all LIRL HN.

1. HJ selection of PAL will only activate PAPI.
2. RWY LGT operate only from twilight or when poorer light levels exist.
3. RWY edge light spacing: 60M.
4. IWI will activate on PAL. Only primary IWI will flash in last 10MIN of 60MIN cycle.