RAMINGINING

ELEV 216

AVFAX CODE 8052



NT UTC +9:30 YRNG
122123S 1345351E VAR 3 DEG E CERT
AD OPR East Arnhem Regional Council, CMB 10 via Winnellie, NT, 0822. PH 08 8979 7836 AH 0427 755 027. ARO H24 0428 845 969.

REMARKS

This AD is a Security Controlled Airport.

PASSENGER FACILITIES

Telephone facilities not AVBL.

AERODROME OBSTACLES

Trees:

a. 294FT AMSL BRG 163 DEG MAG 253M FM ARP. Infringes TNS by 20FT.
b. 277FT AMSL BRG 087 DEG MAG 120M FM ARP. Infringes TNS by 14FT.
c. 254FT AMSL BRG 270 DEG MAG 1,301M FM ARP. Infringes TNS by 20FT.
d. 271FT AMSL BRG 258 DEG MAG 1,135M FM ARP. Infringes TNS by 23FT.

PHYSICAL CHARACTERISTICS

09/27 089 45 Unrated. Sealed WID 18 RWS 90

AERODROME AND APPROACH LIGHTING

RWY 09/27 PTBL(1) BY PRIOR ARRANGEMENT
(1) EMERG use only. IWI and SDBY lighting requires 1HR PN to ARO.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA BRISBANE CENTRE 123.4 Circuit Area

LOCAL TRAFFIC REGULATIONS

RWY 09/27 - ACFT to carry out MAX RAD turns on all sealed pavements. 180 DEG turns at RWY ends only.

CTAF 127.5

CHARTS RELATED TO THE AERODROME

WAC 3109.

RAVENSTHORPE

ELEV 209

AVFAX CODE 6303

WA UTC +8 YNRV
334750S 1201229E VAR 0 DEG W CERT
AD OPR Shire of Ravensthorpe, PO Box 43, Ravensthorpe, WA, 6346.
Email: shire@ravensthorpe.wa.gov.au. ARO 0427 977 489: AH 0427 381 098.
Council PH 08 9839 0000. Fax 08 9838 1282. Website: www.ravensthorpe.wa.gov.au.

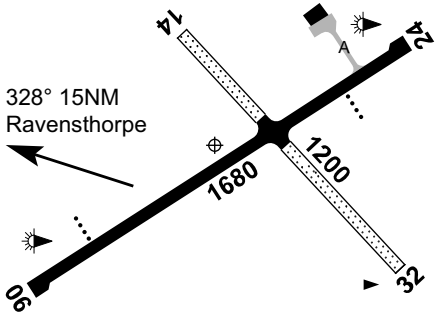

Information may be continued on the next page: PTO

REMARKS

1. AD Charges: RPT, Charter and GA.
2. This AD is a Security Controlled Airport.
3. Access to apron is via personnel gate with coded analogue lock (access air side only - exit is via a turn latch). PH AD OPR for code.
4. Personnel gate must not be secured in open position at any time while unattended.
5. 48HR PPR - CTC ARO.

HANDLING SERVICES AND FACILITIES

Nil fuel AVBL.

PASSENGER FACILITIES

WC (H24). LG only AVBL during scheduled operations.

PHYSICAL CHARACTERISTICS

06/24	059	55a	PCR 210/F/B/Y/T Sealed	WID 30	RWS 150
14/32	139	39c	PCR 45/F/B/Y/T Gravel	WID 30	RWS 90

AERODROME AND APPROACH LIGHTING

RWY 06/24	LIRL	AFRU+PAL 126.7		SDBY PWR AVBL
RWY 06/24	PAPI(1)	AFRU+PAL 126.7	3.0 DEG42FT	SDBY PWR AVBL

(1) Left side.

1. RWY edge light spacing: 06/24: 60M.
2. Manual activation of lighting requires at least 2 HR PN to AD OPR.

OTHER LIGHTING

1. Secondary PWR switchover time: 15 SEC.
2. TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	MELBOURNE CENTRE	125.4

LOCAL TRAFFIC REGULATIONS

1. Itinerant PRKG to W end of RPT apron.
2. RWY 06/24 45 M WID turning nodes at each end.
3. RWY 06/24: ACFT ABV 5,700KG must use turning nodes for 180 DEG turns.
4. All ACFT to make MAX RAD turns at MNM speed to avoid SFC damage.
5. DH8D, E190 and F100 to use outer lead in line.
6. In the event that emergency ACFT and non-emergency ACFT should find themselves congested, Ravensthorpe ground staff will direct non-emergency ACFT to the gravel PRKG bay, W of the APN. It is under strict site guidelines that non-emergency ACFT stay in the position allocated until emergency ACFT complete their OPS and it is safe to vacate APN.

CTAF - AFRU 126.7

ADDITIONAL INFORMATION

Bird hazard exists in VCY of AD. Flocks of Australian ravens, pink and grey galahs, plovers and black cockatoos.

CHARTS RELATED TO THE AERODROME

1. WAC 3461.
2. Also refer to AIP Departure and Approach Procedures.