CTAF - AFRU 118.5

ADDITIONAL INFORMATION

1. Animal hazards exists.
2. Wildlife management program ACT in VCY of AD. 10MIN PN RQ to vacate movement areas. Activity will be de-conflicted with planned flying. CS 'CHASER', PH 0407 232 172.

CHARTS RELATED TO THE AERODROME

1. WAC 3351, 3462.
2. MIL Aerodrome Obstruction Chart Type A: DEC 2024.

GLADSTONE — ELEV 59

AVFAX CODE 4023

QLD		UTC +10	YGLA
235211S	1511322E	VAR 10 DEG E	CERT

AD OPR Gladstone Airport Corporation, PO Box 7200, Kin Kora, QLD, 4680.
Email: admin@gladstoneairport.com.au. PH 07 4977 8800. ARO Duty 07 4977 8812 (H24).

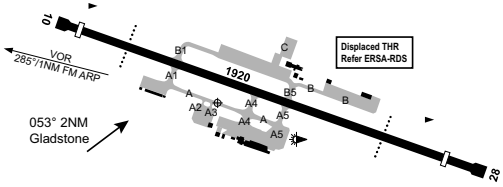

REMARKS

1. AD charges apply, refer to Gladstone Airport conditions of use document. CTC AD OPR by phone/email, 0830-1630 Local.
2. For CHTR OPS 48 HR PN. CTC AD OPR by phone/email. 0830-1630 Local.
3. This AD is a Security Controlled Airport. All pilots and operators must possess and display a current Aviation Security Identification Card (ASIC) when airside.
4. Access to airside RPT aprons. CTC ARO by phone.
5. PN for GA access outside 0900-2030 Local. CTC ARO by phone.

HANDLING SERVICES AND FACILITIES

VIVA: Phone 0427 239 293. Email: gladstonears@outlook.com.Refuelling operating hours 0600-1800 Local MON-FRI, 0600-1700 Local SAT, 0900-1800 Local SUN, 30 MIN PN required for JET A1. AH call-out fees apply. Swipe bowser AVGAS located GA apron via TWY A2 or A3. Viva fuel and Fly2Sky card, VIVA carnet card and credit cards (V and MC).

RESCUE AND FIREFIGHTING SERVICES

1. CAT 6:
   a. MON 2015-1110 UTC.
   b. TUE 2015-1030 UTC.
   c. WED-FRI 2015-1110 UTC.
   d. SAT 2020-0730 UTC.
   e. SUN 0025-1110 UTC.
2. 131.0 MHz AVBL HO.

APRONS AND TAXIWAYS

1. TWY A4 and A5 and A East of TWY A4 - PCR 580/F/C/X/T.
2. TWY A1 and A West of TWY A4 - unrated.
3. TWY B and TXL C - PCR 580/F/D/Y/T.
4. Southern helipads MAX D value 13M. Larger helicopters must use northern helipads.

AERODROME OBSTACLES

1. Light poles, road signs and transient OBST up to 9FT at RWY ends.
2. Fence 41FT AMSL. Infringes TKOF SFC by 3FT.
3. APN lights infringe TNS by MAX 51FT:
   a. Bays 1-4 centred PSN 235216.8S 1511327.8E.
   b. Bay 5,135FT AMSL PSN 235216.7S 1511332.7E.

Information may be continued on the next page: PTO

4. Steady OBST lights
   a. 219FT AMSL PSN 235134.4S 1511426.1E. Infringes inner HZS by 19FT.
   b. 218FT AMSL PSN 235133.5S 1511423.4E. Infringes inner HZS by 18FT.
   c. 160FT AMSL PSN 235151.7S 1511302.3E. Infringes TNS by 9FT.
   d. 317FT AMSL PSN 235118.2S 1511545.3E. Infringes inner HZS by 117FT.
   e. 210FT AMSL PSN 235154.1S 1511215.3E. Infringes TNS by 14FT.
   f. 219FT AMSL PSN 235233.0S 1511511.1E. Infringes RWY 10 TKOF SFC by 52FT.
   g. 180FT AMSL PSN 235243.5S 1511454.5E. Infringes RWY 10 TKOF SFC by 35FT.
   h. 209FT AMSL PSN 234945.6S 1511238.8E. Infringes COS by 9FT.
   i. 80FT AMSL PSN 235157.6S 1511258.0E. Infringes TNS by 7FT.
5. Lit chimneys infringe inner HZS by MAX 304FT
   a. 501FT AMSL PSN 235058.8S 1511311.3E.
   b. 505FT AMSL PSN 235102.2S 1511311.3E.
   c. 504FT AMSL PSN 235105.7S 1511311.2E.
6. Flashing hazard beacons:
   a. 359FT AMSL PSN 235236.3S 1511238.8E. Infringes inner HZS by 281FT.
   b. 540FT AMSL PSN 235206.6S 1511519.3E. Infringes inner HZS by 340FT.
   c. 459FT AMSL PSN 234951.4S 1510906.2E.
   d. 1,219FT AMSL PSN 234817.1S 1510734.0E.
   e. 534FT AMSL PSN 235334.5S 1511522.5E. Infringes inner HZS by 397FT.
7. Unlit OBST:
   a. 87FT AMSL PSN 235206.9S 1511334.1E. Infringes TNS by 4FT.
   b. 2,084FT AMSL PSN 234818.1S 1510509.4E.
   c. 381FT AMSL PSN 235237.4S 1511236.1E.
   d. 380FT AMSL PSN 235347.3S 1511405.7E.
   e. 210FT AMSL PSN 235154.5S 1511215.7E. Infringes TNS by 18FT.
8. Trees:
   a. 114FT AMSL PSN 235227.7S 1511401.4E. Infringes TNS by 14FT.
   b. 90FT AMSL PSN 235225.7S 1511357.2E. Infringes TNS by 3FT.
   c. 94FT AMSL PSN 235224.3S 1511352.3E. Infringes TNS by 5FT.
   d. 106FT AMSL PSN 235225.4S 1511353.0E. Infringes TNS by 6FT.
   e. 194FT AMSL PSN 235154.2S 1511217.1E. Infringes RWY 10 visual segment SFC by 10FT.
   f. 201FT AMSL PSN 235152.8S 1511214.5E. Infringes RWY 10 visual segment SFC by 8FT.
   g. 133FT AMSL PSN 235206.2S 1511254.4E. Infringes TNS by 5FT.
   h. 127FT AMSL PSN 235204.5S 1511253.7E. Infringes TNS by 17FT.
   i. 100FT AMSL PSN 235203.3S 1511253.8E. Infringes TNS by 6FT.
   j. 119FT AMSL PSN 235203.2S 1511251.3E. Infringes TNS by 12FT.
   k. 87FT AMSL PSN 235203.0S 1511257.1E. Infringes TNS by 15FT.
   l. 124FT AMSL PSN 235224.3S 1511345.4E. Infringes TNS by 1FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI.
2. AWIS Phone 07 3564 3715 - Report faults to BoM.
3. AWIS FREQ 126.85 - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

10/28 101 63a PCR 580/F/C/X/T Grooved WID 30 RWS 150

Check APRONS AND TAXIWAYS for additional pavement information.

AERODROME AND APPROACH LIGHTING

RWY 10/28	LIRL	AFRU+PAL 118.8		SDBY PWR AVBL
RWY 10	PAPI	AFRU+PAL 118.8	3.0 DEG53FT	SDBY PWR AVBL
RWY 10	RTIL	AFRU+PAL 118.8		SDBY PWR AVBL
RWY 28	PAPI	AFRU+PAL 118.8	3.0 DEG52FT	SDBY PWR AVBL

1. RWY 10/28 edge light spacing: 60M. LIRL white-coloured.
2. RWY 10 HIRL edge lights stages 4-6 AVBL by pilot request only white-coloured, yellow-coloured for the last 600M. Contact ARO Duty CTAF 118.8 0500-2030 Local. Phone 07 4977 8812 (H24) 20mins PN required.
3. THR: Green.
4. RWY ends: Red.

OTHER LIGHTING

HBN To NE, SE & W of AD

1. Secondary PWR switchover time: 30 SEC.
2. TWY LGT: Blue Edge.
3. Taxi guidance beyond RWY THR: Blue - pavement ends.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA BRISBANE CENTRE 119.55 On ground

On ground COM may be available with ATS dependent on ACFT location, building shielding and railway activity.

RADIO NAVIGATION AND LANDING AIDS

VOR GLA 116.3 235154.9S 1511215.9E (1)

(1) 105/1 NM to ARP. Possible excessive needle fluctuations BTN 275 and 300 radials BLW 10,000FT. Possible minor needle fluctuations on VOR RWY 28 APCH at and BLW 1,000FT.

LOCAL TRAFFIC REGULATIONS

1. ACFT are required to use entire width of RWY to execute 180DEG turns.
2. Skid mounted ACFT are not permitted to park on sealed or asphalt aprons without AD OPR approval.
3. Due to limited PRKG non SKED ACFT ABV 5,700KG MTOW and Jet ACFT RQ AD OPR approval on 48 HR notice.
4. Parking on the RPT APN Bays 1-4 is restricted to RPT ACFT or ACFT approved by the AD OPR.
5. TWY A2, A3 and B5 unavailable to ACFT above 5,700KG MTOW.
6. TWY B west of TWY B5, TWY B1, northern ACFT storage APN and TWY C only AVBL with AD OPR approval.
7. RWY 10/28 intermediate turning nodes unlit.

FLIGHT PROCEDURES

Right hand circuits required RWY 28.

CTAF - AFRU 118.8

ADDITIONAL INFORMATION

1. High Intensity Lighting in vicinity of railway site on APCH to RWY 10.
2. Bird hazard exists. Species-specific NOTAM will be issued during periods of increased activity.
3. Bird hazard (lorikeets) ACT in VCY of THR RWY 28, particularly at dusk.
4. Wildlife hazard (Flying Foxes/Bats) ACT in VCY of RWY 10/28, 30MIN before last light and 1HR after last light.

CHARTS RELATED TO THE AERODROME

1. WAC 3235, 3340.
2. Aerodrome Obstacle Chart, Type A Charts: RWY 10/28, December 2024.
3. Also refer to AIP Departure and Approach Procedures.

Information may be continued on the next page: PTO