PHYSICAL CHARACTERISTICS
08/26 085 38a Unrated. Central 18M of WID sealed. WID 30 RWS 80
RWY WID will revert to 18M when soft wet SFC NOTAM is current. RWY AVBL to ACFT approved for 18M OPS.

AERODROME AND APPROACH LIGHTING
RWY 08/26 LIRL(1)
(1) MED EMERG and PPR use only.

ATS AND AERODROME COMMUNICATION FACILITIES
FIA BRISBANE CENTRE 122.4

CTAF 126.7

ADDITIONAL INFORMATION
Wildlife hazard exists.

CHARTS RELATED TO THE AERODROME
WAC 3220.

MOUNT HOLLAND ELEV 1462

AVFAX CODE 6315
WA UTC +8 YMHL
320630S 1194536E VAR 0 DEG W CERT
AD OPR Covalent Lithium Pty Ltd, L3, 109 St Georges Tce, Perth, WA, 6000.
Email: mth.aerodrome@covalentlithium.com. PH Site Contact: 08 9230 5400.
ARO or AD MGR 0437 721 944 (H24). Website: www.covalentlithium.com.

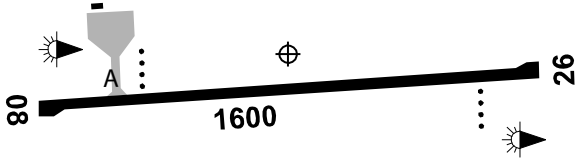

REMARKS
Restricted Operations. PPR from AD MGR/ARO.

HANDLING SERVICES AND FACILITIES
Marshalling, parking allocation and ground handling services by prior arrangement with AD MGR.

APRONS AND TAXIWAYS
TWY A - Code C, WID 23M Bitumen - unrated.

AERODROME OBSTACLES
1. Lit tower 1,622FT AMSL BRG 51 DEG MAG 0.51NM FM ARP. Infringes inner HZS by 23FT.
2. Unlit tower, 1,777FT AMSL BRG 345.7 DEG MAG 1.58NM FM ARP. Infringes inner HZS by 177FT.
3. Power pole, 1,623FT AMSL BRG 279 DEG MAG 1.15NM FM ARP. Infringes inner HZS by 23FT.
4. Waste Rock Landform, 1,630FT AMSL 320610.0S 1194501.0E. Infringes inner HZS by 30FT.

PHYSICAL CHARACTERISTICS
08/26 085 52a PCR 200/F/D/Y/T WID 30 RWS 140

AERODROME AND APPROACH LIGHTING
RWY 08/26 LIRL AFRU+PAL 126.4
RWY 08/26 PAPI(1) AFRU+PAL 126.4 3.0 DEG40.4FT
(1) Left side.
Backup generator power available to main aerodrome lighting system via manual transfer. Allow 5 MIN for transfer.

Information may be continued on the next page: PTO

OTHER LIGHTING
TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES
FIA	MELBOURNE CENTRE	125.4 3500FT

LOCAL TRAFFIC REGULATIONS
1. All fixed wing ACFT ABV 5,700KG must make MAX RAD turns at MNM speed at turn pads to avoid SFC damage.
2. Itinerant PRKG CTC AD MGR/ARO.
3. All ACFT to follow APN markings.
4. All jet ACFT to use idle power for movements on the APN with the exception of breakaway thrust to initiate taxi.

FLIGHT PROCEDURES
Right hand CCTS on RWY 08.

CTAF - AFRU 126.4

ADDITIONAL INFORMATION
CAUTION: Blasting occurs to the N of the AD. Dust plumes may occur following blasting. Contact ARO for more details.

CHARTS RELATED TO THE AERODROME
1. WAC 3462.
2. Also refer to AIP Departure and Approach Procedures.

MOUNT HOTHAM — ELEV 4260

AVFAX CODE 3065
VIC		UTC +10	YHOT
370254S	1472003E	VAR 13 DEG E	CERT

AD OPR Mt Hotham Airport Operations Pty Ltd, PO Box 8280, Northland Centre, VIC, 3072. ARO 0467 072 476 (H24). Fax AD OPS 03 5159 6776. Website: www.mthothamairport.com.au.

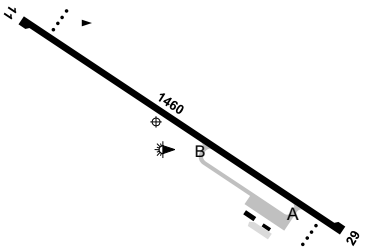

REMARKS
1. AD Charges: All ACFT.
2. PPR FM AD OPR for all night and non-RPT OPS, refer to website for OPR approval (PDF).
3. Call-out fee applies for approved night OPS.

HANDLING SERVICES AND FACILITIES
JET A1 year round, 2200-0600 UTC DLY; JUN-SEP - 4HR PN. OT 24HR PN. CTC AD OPR. Call-out fee applies weekends and PH during non-winter period. EFTPOS and credit cards only.

PASSENGER FACILITIES
June/September - PT/HC/BU/AC/LG/RF/WC. OT restricted hours.

APRONS AND TAXIWAYS
1. TWY B not AVBL to ACFT ABV 5,700KG MTOW.
2. TWY B AVBL to ACFT with a wingspan up to and not exceeding 15M.