FLIGHT PROCEDURES
Right hand circuits RQ when OPR on RWY 30.

CTAF 126.7

ADDITIONAL INFORMATION
Bird hazard exists.

CHARTS RELATED TO THE AERODROME
WAC 3109.

OLYMPIC DAM — ELEV 344

AVFAX CODE 5106

SA		UTC +9:30	YOLD
302906S	1365236E	VAR 7 DEG E	CERT

AD OPR BHP Olympic Dam Corporation Pty Ltd, PO Box 150, Roxby Downs, SA, 5725.
Email: olympicdamairport@bhp.com. ARO 0477 307 824.

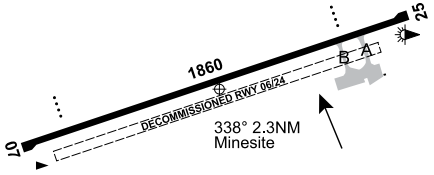

REMARKS
1. Prior permission required, MNM 3 days notice - contact AD OPR.
2. This AD is a Security Controlled Airport.
3. AD not AVBL to non-radio equipped or non-mode C transponder equipped ACFT.

HANDLING SERVICES AND FACILITIES
AIR BP: Phone 0407 856 097. JET A1 self-service or overwing only. Carnet Card.

PASSENGER FACILITIES
PT/TX/HC/WC.

AERODROME OBSTACLES
1. Smelter stacks (x2) 543FT AMSL BRG 339 DEG MAG, 4,200M FM ARP. Both infringe COS. Unlit.
2. Smelter stack 634FT AMSL BRG 335 DEG MAG, 4,500M FM ARP. Infringes the COS. Lit.
3. High voltage PWR line 504FT AMSL with 6 lit masts, 3,500M SW of ARP. Infringes inner HZS.
4. Crane 650FT AMSL, BTN BRG 328 and 355 DEG MAG BTN 2.2 and 2.5NM FM ARP. Infringes COS.

METEOROLOGICAL INFORMATION PROVIDED
1. TAF CAT C, METAR/SPECI.
2. AWIS Phone 08 8150 3811 - Report faults to BoM.
3. AWIS FREQ 128.05 (requires one-second pulse to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS
07/25 064 61a PCR 421/F/C/1.50 MPa/T Grooved. WID 30 RWS 150

AERODROME AND APPROACH LIGHTING

RWY 07/25	LIRL	PAL 119.6		SDBY PWR AVBL
RWY 07	PAPI(1)	PAL 119.6	3.0 DEG49FT	SDBY PWR AVBL
RWY 25	PAPI(2)	PAL 119.6	3.0 DEG49FT	SDBY PWR AVBL

(1) Left side only.
(2) Right side only.
1. HJ selection of PAL will only activate PAPI. RWY lights will OPR when poor light levels exist.
2. RWY edge light spacing: 60M.

Information may be continued on the next page: PTO

OTHER LIGHTING
1. Secondary PWR switchover time: 15 SEC.
2. TWY light: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES
FIA MELBOURNE CENTRE 122.0 Circuit Area

LOCAL TRAFFIC REGULATIONS
1. All ACFT are to make a taxi broadcast on Melbourne Centre 122.0 and CTAF 126.6.
2. TWY B for ACFT 21,000KG and BLW.

FLIGHT PROCEDURES
1. Right hand CCTS required when operating on RWY 07.
2. ACFT are to avoid overflying the mine and plant areas N of AD due to obstacles and blasting.

CTAF - AFRU 126.6

ADDITIONAL INFORMATION
1. Caution: Frequent movements of high capacity RPT ACFT and charter ACFT occur at AD.
2. Caution: Potential for air traffic congestion and conflict exists.
3. Landing permission may include a slot time to avoid peak movement periods.
4. Bird hazard exists.

CHARTS RELATED TO THE AERODROME
1. WAC 3354.
2. Also refer to AIP Departure and Approach Procedures.

ONSLOW ELEV 23

AVFAX CODE 6807

WA UTC +8 YOLW
214006S 1150647E VAR 0 DEG E CERT



AD OPR Shire of Ashburton, PO Box 20, Onslow, WA, 6710.
Email: onslow.airport@ashburton.wa.gov.au. PH 08 9153 2000.
ARO AH 0487 654 272.

REMARKS
1. AD Charges apply.
2. This is a security controlled airport.
3. High-visibility vest (or equivalent) and valid ASIC or Onslow Airport VIC must be worn.
4. Any OPR wishing to store private fuel at AD is to CTC the AD OPR.

HANDLING SERVICES AND FACILITIES
Skyfuel: JET A1 tanker service AVBL by arrangement. 2HR PN. Card activated self serve. H24 JET A1 pump also AVBL, MC, V and Skyfuel card. Phone: 0448 562 151, Email: skyfuelonslow@gmail.com, Website: www.skyfuel.com.au for site details.
World Fuel Services H24 AVGAS bowser, WFS carnet card, V and MC via Compac Pay smartphone APP. Phone 0459 604 281.
Ground handling services by arrangement - Minres Air.
Phone: 0472 848 989, 0459 311 421. Email: onslow.airport@mrl.com.au.

PASSENGER FACILITIES
WC/TX/HC/RF/LG

APRONS AND TAXIWAYS
1. TWY A, B and C AVBL to Code C ACFT and BLW.
2. All ACFT under 5,700KG to use east side of southern APN.
3. TWY B BTN TWY D and C not AVBL to ACFT with outer main gear wheel span exceeding 8M.
4. TWY E AVBL to code B ACFT and below with MAX wingspan of 18M.

AERODROME OBSTACLES
Illuminated WDI. PSN BRG 205 MAG 0.6NM FM ARP. Infringes TNS by 2FT.