

1. Description


1.1. Project

Project Name	STM32F303_Grove-ePaper
Board Name	NUCLEO-F303K8
Generated with:	STM32CubeMX 4.25.0
Date	04/09/2018

1.2. MCU

MCU Series	STM32F3
MCU Line	STM32F303
MCU name	STM32F303K8Tx
MCU Package	LQFP32
MCU Pin number	32

2. Pinout Configuration

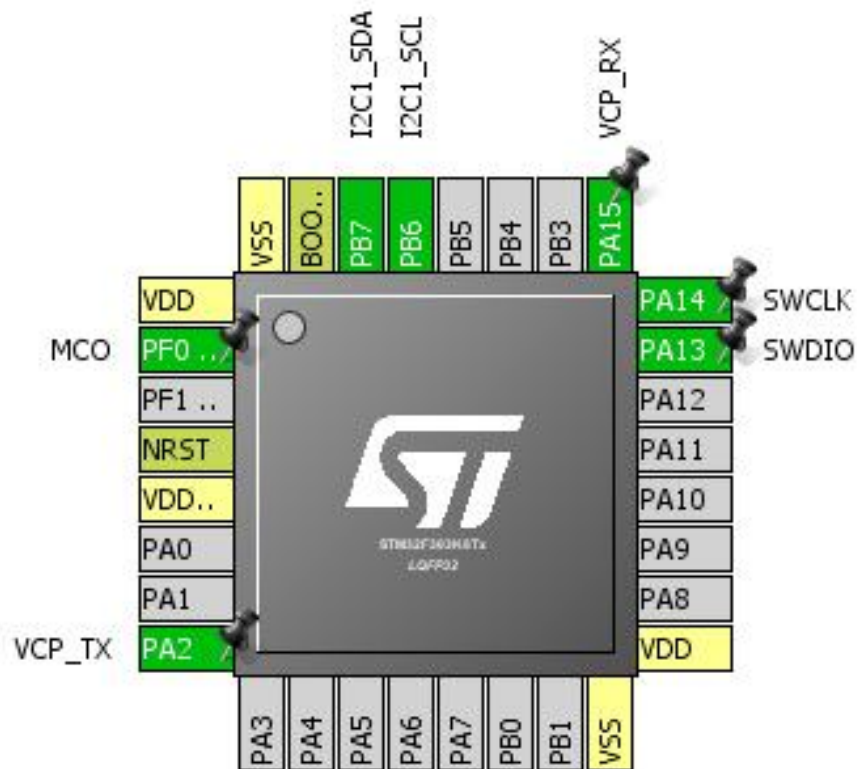

3. Pins Configuration

Pin Number LQFP32	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VDD	Power		
2	PF0 / OSC_IN	I/O	RCC_OSC_IN	MCO
4	NRST	Reset		
5	VDDA/VREF+	Power		
8	PA2	I/O	USART2_TX	VCP_TX
16	VSS	Power		
17	VDD	Power		
23	PA13	I/O	SYS_JTMS-SWDIO	SWDIO
24	PA14	I/O	SYS_JTCK-SWCLK	SWCLK
25	PA15	I/O	USART2_RX	VCP_RX
29	PB6	I/O	I2C1_SCL	
30	PB7	I/O	I2C1_SDA	
31	BOOT0	Boot		
32	VSS	Power		

5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x2000090E

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

5.2. RCC

High Speed Clock (HSE): BYPASS Clock Source

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

5.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.4. USART2

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	9600 *
Word Length	8 Bits (including Parity) *
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull up	High *	
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull up	High *	
RCC	PF0 / OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	MCO
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	SWCLK
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull up pull down	High *	VCP_TX
	PA15	USART2_RX	Alternate Function Push Pull	No pull up pull down	High *	VCP_RX

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event global interrupt / I2C1 wake-up interrupt through EXT line 23	unused		
I2C1 error interrupt	unused		
USART2 global interrupt / USART2 wake-up interrupt through EXT line 26	unused		
Floating point unit interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F3
Line	STM32F303
MCU	STM32F303K8Tx
Datasheet	025083_Rev5

7.2. Parameter Selection

Temperature	25
Vdd	3.6

8. Software Project

8.1. Project Settings

Name	Value
Project Name	STM32F303_Grove-ePaper
Project Folder	C:\Users\stern\workspace\STM32F303_Grove-ePaper
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F3 V1.9.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

9. Software Pack Report