

1. Description


1.1. Project

Project Name	NucleoF411-SPI
Board Name	NUCLEO-F411RE
Generated with:	STM32CubeMX 4.22.1
Date	10/01/2017

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F411
MCU name	STM32F411RETx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

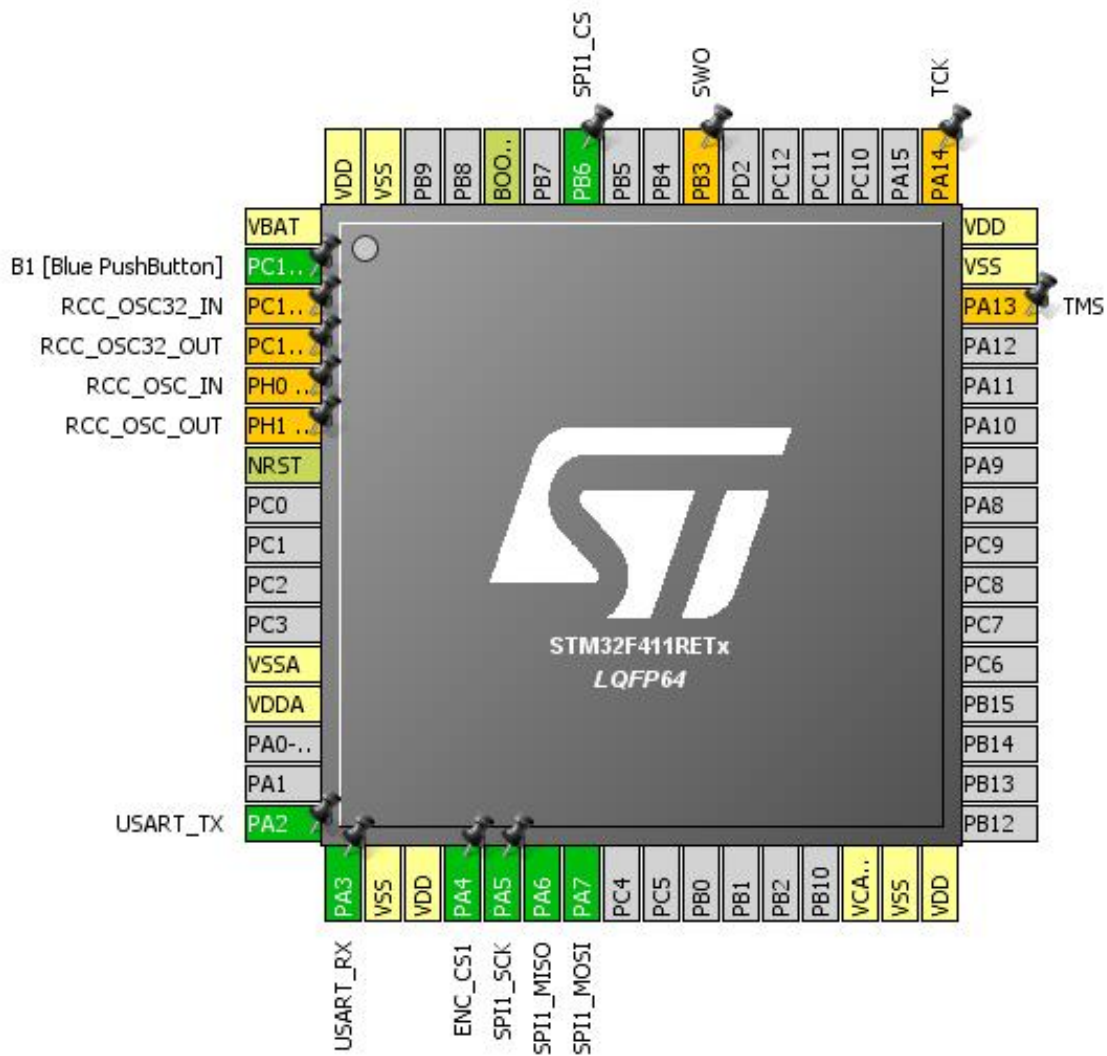

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-ANTI_TAMP	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN *	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT *	I/O	RCC_OSC32_OUT	
5	PH0 - OSC_IN *	I/O	RCC_OSC_IN	
6	PH1 - OSC_OUT *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
20	PA4 **	I/O	GPIO_Output	ENC_CS1
21	PA5	I/O	SPI1_SCK	
22	PA6	I/O	SPI1_MISO	
23	PA7	I/O	SPI1_MOSI	
30	VCAP1	Power		
31	VSS	Power		
32	VDD	Power		
46	PA13 *	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14 *	I/O	SYS_JTCK-SWCLK	TCK
55	PB3 *	I/O	SYS_JTDO-SWO	SWO
58	PB6 **	I/O	GPIO_Output	SPI1_CS
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

5. IPs and Middleware Configuration

5.1. SPI1

Mode: Full-Duplex Master

5.1.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	64 *
Baud Rate	1.3125 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.2. SYS

Timebase Source: SysTick

5.3. USART2

Mode: Asynchronous

5.3.1. Parameter Settings:

Basic Parameters:

Baud Rate	9600 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
----------------	----------------------

Over Sampling

16 Samples

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	Pull-up *	Very High *	
	PA6	SPI1_MISO	Alternate Function Push Pull	Pull-up *	Very High *	
	PA7	SPI1_MOSI	Alternate Function Push Pull	Pull-up *	Very High *	
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	Very High *	USART_RX
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13-ANTI_TAMP	GPIO_EXTI13	External Interrupt Mode with Falling edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High *	ENC_CS1
	PB6	GPIO_Output	Output Push Pull	Pull-up *	Very High *	SPI1_CS

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
SPI1 global interrupt	unused		
USART2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F411
MCU	STM32F411RETx
Datasheet	026289_Rev6

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	NucleoF411-SPI
Project Folder	C:\Users\stern\workspace\NucleoF411-SPI
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F4 V1.16.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No