



POWERING INDUSTRY. DELIVERING PERFORMANCE.

Industrial Oil & Maintenance Solutions

Industrial Fuels • Base Oils • White Oils • Solvents • Petrochemicals



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



INTRODUCTION :

Driving Business Through Reliable Petroleum Solutions

M Engle Petroleum is a professionally managed petroleum company focused on the distribution and supply of petroleum products and allied industrial solutions. We are committed to serving businesses with dependable products, consistent supply and professional service, while maintaining a strong emphasis on statutory compliance and responsible operations.

Our approach is built around understanding the practical requirements of our customers and creating a reliable supply ecosystem that supports their day-to-day operations. From product sourcing and procurement to handling and delivery, we aim to bring greater consistency, transparency and convenience to petroleum product requirements.

OUR BUSINESS

M Engle Petroleum is positioned to cater to the requirements of a wide range of industrial, commercial, institutional and business customers. Our product portfolio is designed around the diverse applications of petroleum products, enabling customers to source their requirements through a professional and dependable business partner.

We believe that successful petroleum distribution is not only about supplying a product – it is about ensuring the right product, dependable availability, competitive commercial terms and timely service.

BUILT ON TRUST & COMPLIANCE

Our business is supported by relevant statutory registrations and petroleum-sector authorisation, reflecting our commitment to operating with appropriate regulatory discipline.

OUR KEY CREDENTIALS INCLUDE:

PESO Authorisation – Petroleum & Explosives Safety Organisation

A/P/CB/MP/16/167 (P550509)

Udyam Registration – UDYAM-MP-23-0058639

GST Registration – 23AAPPE4185R1ZD

OUR CORE STRENGTHS

RELIABLE SOURCING : Building dependable supply channels to meet customer requirements.

PRODUCT RANGE : Serving diverse petroleum and allied product requirements.

PROFESSIONAL OPERATIONS : Structured processes focused on responsible handling and supply.

CUSTOMER COMMITMENT : Developing long-term relationships through service and transparency.

COMPLIANCE DRIVEN : Operating with the required registrations and applicable authorisations.

OUR VISION :

To develop M Engle Petroleum into a trusted and recognised petroleum distribution company, known for reliable products, professional service, regulatory responsibility and long-term customer relationships.

OUR MISSION :

To simplify petroleum procurement for businesses by providing dependable products, reliable supply and professional service – every time.

A more premium brochure-style headline could be:

****MORE THAN PETROLEUM.**

A PARTNER YOU CAN RELY ON.**

M Engle Petroleum brings together product availability, reliable supply, professional service and compliance to create a dependable petroleum sourcing partner for businesses.

Authorised • Reliable • Professional • Customer Focused

PRODUCT INDEX



CATEGORY	PRODUCT	CODE
BLACK OIL	Light Diesel Oil (LDO)	BO-LDO-001
BLACK OIL	Furnace Oil	BO-FO-002
BLACK OIL	Fuel Oil	BO-FU-003
BLACK OIL	Low Sulphur Heavy Stock (LSHS)	BO-LSHS-004
BLACK OIL	Pyrolysis Oil	BO-PO-005
BLACK OIL	Recycled Oil	BO-RO-006
WHITE OIL	Light Liquid Paraffin Oil (LLP)	WO-LLP-001
WHITE OIL	Quenching Oil	SO-QO-002
BASE OIL	Base Oil	BA-OI-1512
PETROLEUM & HYDROCARBON SOLVENTS	Mineral Turpentine Oil (MTO)	SOL-MTO-001
PETROLEUM & HYDROCARBON SOLVENTS	Naphtha	SOL-NAP-002
PETROLEUM & HYDROCARBON SOLVENTS	C9 Solvent	SOL-C9-003
PETROLEUM & HYDROCARBON SOLVENTS	C9 Plus Solvent	SOL-C9P-004
PETROLEUM & HYDROCARBON SOLVENTS	C10 Solvent	SOL-C10-005
AROMATIC PETROCHEMICALS	Benzene	AR-BEN-001
AROMATIC PETROCHEMICALS	Toluene / Toluol	AR-TOL-002
AROMATIC PETROCHEMICALS	Crude Benzol	AR-CBZ-003



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



PRODUCT LIST

BLACK OILS

LIGHT DIESEL OIL (BPCL)

CODE : BO-LDO-001

Light Diesel Oil falls under class C category fuel having flash point above 66°C. It is a blend of distillate components and a small amount of residual components. It is marketed under BIS 1460:2000 specification for Diesel fuels.

LDO is used in lower RPM engines. It is used in Lift irrigation pump sets, DG Sets and as a fuel in certain boilers and furnaces.



SR. NO.	PARAMETER	TEST METHOD	UNIT	SPECIFICATION	TEST RESULT
1	Ash Content	IS 1448 (P: 4)	% wt	Max 0.02	0.02
2	Copper strip corrosion, 3hrs@100°C	IS 1448 (P: 15)	-	Not worse than No 2	1a
3	Density at 15°C	IS 1448 (P: 16)	kg/m ³	To be reported	898.2
4	Density at 15°C	IS 1448 (P: 16)	g/ml	To be reported	0.8982
5	Flash point (PMCC)	IS 1448 (P: 21)	°C	Min 66	66.0
6	Kinematic viscosity @ 40°C	IS 1448 (P: 25)	cSt	Max 15.000	8.915
7	Pour Point	IS 1448 (P: 10)	°C	Max 21	1
8	Ramsbottom Carbon Residue	IS 1448 (P: 8)	% wt	Max 1.5	1.0
9	Sediment by Extraction	IS 1448 (P: 30)	% wt	Max 0.1	0.04
10	Total Acid Number	ASTM D664	mg KOH/g	Max 0.5	0.4
11	Total Sulphur	ASTM D4294	% wt	Max 1.5	0.8
12	Water Content	IS 1448 (P: 40)	% vol.	Max 0.25	0.2



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



PRODUCT LIST

BLACK OILS

FURNACE OIL

CODE : BO-FO-002

Furnace Oil is a fraction obtained from petroleum distillation, either as a distillate or a residue. Broadly speaking fuel oil is any liquid petroleum product that is burned in a furnace or boiler for the generation of heat or used in an engine for the generation of power, except oils having a flash point of approximately 40 °C (104 °F) and oils burned in cotton or wool-wick burners. In this sense, diesel is a type of fuel oil. Fuel oil is made of long hydrocarbon chains, particularly alkaline, cyclo-alkaline and aromatics. The term fuel oil is also used in a stricter sense to refer only to the heaviest commercial fuel that can be obtained from crude oil i.e. heavier than gasoline and naphtha.

Furnace Oil is a residual fuel (motor spirit / gasoline, high speed diesel and kerosene are distillate fuels). It is a dark, viscous liquid at room temperature. It is a complex mix of hydrocarbons with carbon atoms ranging mainly from 20 to 55. It is produced by blending residues from various refinery processing units and diluting with middle distillates.

SPECIFICATION

Furnace oil in the current marketing range meets Bureau of Indian Standards Specification IS: 1593-1982 for fuel oils, grade Mv2.

VISCOSITY

Viscosity is the most important characteristic in the furnace oil specification. It influences the degree of pre-heat required for handling, storage and satisfactory atomization. If the oil is too viscous it may become the most important characteristic in the furnace oil specification. It influences the degree of pre-heat required for handling, storage and satisfactory atomization. If the oil is too viscous it may become difficult to pump, burner may be hard to light and operation may be erratic. Poor atomization may result in the carbon deposits on the burner tips or on the walls. The upper viscosity limit for furnace oil is such that it can be handled without heating in the storage tank is excepting under severe cold conditions. Pre-heating is necessary for proper atomization.

SR. NO.	PARAMETER	TEST METHOD	UNIT	SPECIFICATION	TEST RESULT
1	Density at 15°C	IS 1448 [11:16]	0.9614	To be reported	0.9614
2	Flash point (PMCC)	IS 1448 [13:21]	77	Min 66	77
3	Kinematic Viscosity@ 50°C	IS 1448 [P: 25]	138	125 to 180	138
4	Total Sulphur	ASTMD4294	2.09	Max 4.0	2.09
5	Pour Point	IS 1448 [P: 10]	12	Max 27	12
6	Water_Content	IS 1448 [P: 40]	-	Max 1.0	0.30 % by mass
7	Calorific value (Gross)	IS 1448 [P: 7]	-	To be reported	10253 Kcal/Kg
8	Acidity. Inorganic, ma of K01-1/a Ash Content	ASTM D974 / IS 1448 [P: 4]	0 iowt	Nil / Max 0.1	Nil / 0.010
9	Sediment by Extraction	IS 1448 [P: 30]	% wt	Max 0.25	0.03



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



FUEL OIL

CODE : BO-FU-003

Fuel Oil is a fraction obtained from petroleum distillation, either as a distillate or a residue. Broadly speaking fuel oil is any liquid petroleum product that is burned in a furnace or boiler for the generation of heat or used in an engine for the generation of power, except oils having a flash point of approximately 40 °C (104 °F) and oils burned in cotton or wool-wick burners. In this sense, diesel is a type of fuel oil.

Fuel oil is made of long hydrocarbon chains, particularly alkaline, cycloalkaline and aromatics. The term fuel oil is also used in a stricter sense to refer only to the heaviest commercial fuel that can be obtained from crude oil i.e. heavier than gasoline and naphtha.

Fuel Oil is a residual fuel (motor spirit / gasoline, high speed diesel and kerosene are distillate fuels). It is a dark, viscous liquid at room temperature. It is a complex mix of hydrocarbons with carbon atoms ranging mainly from 20 to 55. It is produced by blending residues from various refinery processing units and diluting with middle distillates.



SR. NO.	PARAMETER	TEST METHOD	UNIT	TEST RESULT
1	Specific Gravity @ 30°C.	SP/TM/003	g/ml 0.9 to 0.92	0.902
2	Flash Point	SP/TM/004	g/ml 50 to 60	52.5
3	Kinematic Viscosity @ 30°C.	SP/TM/005	g/ml 2.5 to 15.7	4.960 CST
4	Pure Point	SP/TM/006	g/ml ≤ 12	1°C.
5	Rams Bottom Carbon Residue.	SP/TM/007	g/ml ≤ -1.50	0.90 %w
6	Ash Content	SP/TM/008	g/ml ≤ 0.02	0.002 % wt
7	Total Sulphur	SP/TM/009	g/ml ≤ 1.8	1.49 % wt
8	Water Content	SP/TM/010	g/ml ≤ 0.25	0 % vol
9	Calorific Value	SP/TM/011	g/ml 9000 kgs 10500 kgs	9600 kgs



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



LOW SULPHURE HEAVY STOCK (LSHS)

CODE : BO-LSHS-004

Light Diesel Oil falls under class C category fuel having flash point above 66OC. It is a blend of distillate components and a small amount of residual components. It is marketed under BIS 1460-2000 specification for Diesel fuels. We deal in Brand like Castrol, Hindustan Petroleum (HP), Indian Oil Corporation (IOC), Gulf, Veedol

is used in lower RPM engines. It is used in Lift irrigation pump sets, DG Sets and as a fuel in certain boilers and furnaces.



SR. NO.	PARAMETER	TEST METHOD	UNIT	LIMITS	
				RMG 380	RMG 180
1	Kinematic Viscosity at 50°C	ISO 3104	cSt	Max 380	Max 180
2	Density at 15°C	ISO 3675 or 12185	Kg/m ³	Max 991.0	Max 991.0
3	CCAI	Calculated	-	Max 860	Max 860
4	Sulphur	ISO 8754 or 14596; ASTM D4294	% mass	Max 0.5%	Max 0.5%
5	Flash Point	ISO 2719	°C	Min 66.0	Min 66.0
6	Hydrogen Sulfide	IP 570	Mg/kg	Max 2.0	Max 2.0
7	Acid Number	ASTM D664	Mg KOH/g	Max 2.5	Max 2.5
8	Total Sediment - Aged	ISO 10307-2	% mass	Max 0.10	Max 0.10
9	Carbon Residue - Micro method	ISO 10370	% mass	Max 18.0	Max 18.0
10	Pour Point	ISO 3016	°C	Max 30.0	Max 30.0
11	Water	ISO 3733	% vol	Max 0.50	Max 0.50
12	Ash	ISO 6245	% mass	Max 0.1	Max 0.1
13	Vanadium	IP 501 or 470; ISO 14597	Mg/kg	Max 350	Max 350
14	Sodium	IP 501 or 470	Mg/kg	Max 100	Max 100
15	Aluminium + Silicon	IP 501 or 470; ISO 10478	Mg/kg	Max 60	Max 60



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



PYROLYSIS OIL

CODE : BO-PO-005

Pyrolysis oil, sometimes also known as bio-crude or bio-oil, is a synthetic fuel under investigation as substitute for petroleum. It is obtained by heating dried biomass without oxygen in a reactor at a temperature of about 500 °C (900 °F) with subsequent cooling. Pyrolysis oil is a kind of tar and normally contains levels of oxygen too high to be considered a pure hydrocarbon. This high oxygen content results in non-volatility, corrosiveness, immiscibility with fossil fuels, thermal instability, and a tendency to polymerize when exposed to air. As such, it is distinctly different from petroleum products. Removing oxygen from bio-oil or nitrogen from algal bio-oil is known as upgrading.

Pyrolysis oil is a residual fuel (motor spirit/gasoline, high speed diesel and kerosene are distillate fuels). It is a dark, viscous liquid at room temperature. It is a complex mix of hydrocarbons with carbon atoms ranging mainly from 20 to 55. It is produced by blending residues from various refinery processing units and diluting with middle distillates.



SR. NO.	PARAMETER	TEST METHOD	UNIT	TEST RESULT
1	Density @ 15°C	ASTM D - 4052 - 15	g/cc	0.9223
2	Sulphur (S)	ASTM D - 4294 - 16	% wt.	0.90
3	Gross Calorific Value	ASTM D - 4809 - 13	kcal/kg	10341
4	Condration Carbon Residue	ASTM D - 189 - 14	% wt.	0.45
5	Kinematic Viscosity @ 40°C	ASTM D - 445 - 15	cSt.	4.597
6	Water Content	ASTM D - 95 - 13 e1	% vol.	0.20



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



RECYCLED BASE OIL

CODE : BO-RO-006

Used oil, or 'sump oil' as it is sometimes called, should not be thrown away. Although it gets dirty, used oil can be cleaned of contaminants so it can be recycled again and again. There are many uses for recycled used oil.

THESE INCLUDE:

- Industrial burner oil, where the used oil is dewatered, filtered and demineralised for use in industrial burners
- Mould oil to help release products from their moulds (e.g. pressed metal products, concrete) Hydraulic oil
- Hydraulic oil
- Bitumen based products;
- An additive in manufactured products; or
- Re-refined base oil for use as a lubricant, hydraulic or transformer oil.

Once you have taken your used oil to your local collection facility, used oil collectors take the used oil and undertake some pre-treatment and recycling of the used oil or sell it to a specialised used oil recycler.



SR. NO.	PARAMETER	TEST METHOD	TEST RESULT
1	Apperance	Visual	Bright& Clear
2	Colour	D 1500	L 2.5
3	Density 29.5°C, g/ml	D 4052	0.836
4	Kinematic Viscosity 40°C, cst	D 445	22.79
5	Kinematic Viscosity 100°C, cst	D 445	4.316
6	Viscosity Index		91.546
7	Total and Number	D 664	0.178 mgkoh/gms
8	Flash Point	D92	180



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



LIGHT LIQUID PARAFFIN OIL

CODE : WO-LLP-001

Light Liquid Paraffin Oil Ip is highly purified mixture of liquid saturated hydrocarbons obtained from petroleum and is highly paraffinic in nature. Light Liquid Paraffin oil is transparent, & free from fluorescence in daylight. It is colourless, tasteless, and odourless when cold. Light liquid paraffin oil Ip highly refined hydro-treated oil has excellent thermal & chemical stability, having high flash point & is soluble in Chloroform & solvent Ether.

USES OF LLP :-

Light Liquid Paraffin Oil Ip is used in the manufacture of Anti-static Coning oil, Knitting oil & other Textile Auxiliaries, Plant Spray Oil, Agrochemicals, Aerosols, Dye Intermediates, Paper Industry; Perfumery, Food Grade Speciality Lubricants, Food Grade Plastics used as a Lubricant Plasticizer, Attars, Flavours & Fragrances, Perfumery Chemicals, Speciality Chemicals, Incenses, Personal Care Products, Leather Chemicals, Fat Liquors, Petrochemical Solvents, etc. It may also be used in the manufacture of Pharmaceuticals and Cosmetic Products like Creams, Lotions, Perfumery Industry, Bulk Drugs & Food Industry etc.



SR. NO.	PARAMETER	TEST METHOD	TEST RESULT
1	Apperance	VISUAL	Bright&Clear
2	Density 29.5°C	ASTM D1298	To Report
3	Kinematic Viscosity 40°C, cst	ASTM D445	10.82
4	Flash Point	ASTM D97	-15
5	Pour point	ASTM D92	156
6	Colour	ASTM D1500	<0.5



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



QUENCHING OIL

Controlled Cooling. Consistent Hardness. Reliable Performance.

CODE : SO-QO-002

PRODUCT OVERVIEW :

M. Engle Quenching Oil is a specially formulated industrial heat-treatment fluid designed for controlled cooling of heated metal components during the quenching process.

It helps achieve consistent cooling characteristics while supporting the required hardness, dimensional stability and surface quality of treated components.

KEY PERFORMANCE FEATURES

CONTROLLED COOLING :

Designed to provide a controlled cooling rate, helping achieve consistent heat-treatment results.

THERMAL STABILITY :

Formulated for reliable performance during repeated heating and cooling cycles.

REDUCED DISTORTION :

Supports uniform heat extraction to help minimize distortion and dimensional variation.

GOOD OXIDATION RESISTANCE :

Helps maintain oil performance during extended operating conditions.

LOW FOAMING :

Suitable for industrial quenching systems where controlled circulation and cooling are important.


EXTENDED OIL LIFE :

Proper operating and maintenance practices can help maintain performance over repeated cycles.

APPLICATIONS

M. Engle Quenching Oil can be used for heat-treatment operations involving:

- Gears & Gear Components
- Bearings
- Shafts & Axles
- Automotive Components
- Fasteners & Machine Parts
- Forged Components
- Tool & Die Components
- General Engineering Components
- QUENCHING PROCESS

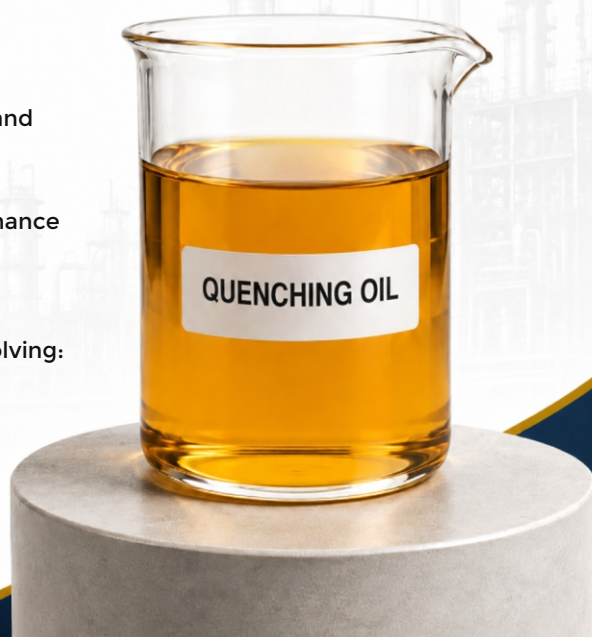

GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN

BASE OIL

BASE OIL RANGE

SN-150	N-500
SN-500	LUB-32
N-150	LUB-100



The refining process of mineral oils has improved greatly in the 20th century.

The American Petroleum Institute (API) divided all base oils into five separate groups in the early 1990s. The first 3 groups were dedicated to mineral oils and the 2 remaining groups contained synthetic oils predominantly.

Group 1, 2 and 3 are all mineral oils, with chronologically increasing refining process severity. Base oils under Group 1 are made using solvent-refining or solvent-extraction technology.

Base oils under Group 2 are produced by hydrotreating or hydrogenation. It is a process that uses hydrogen gas to refine oils, but they are better for converting components like aromatics that are undesirable, into hydrocarbon structures that are desirable.

Base oils in Group 3 are produced in a similar fashion as Group 2, the only difference is that the process of hydrogenation or hydrotreating in group 3 is coupled with high pressures and high temperatures. This leads to convert all the undesirable components in the oil into desirable hydrocarbon structures.

When you compare these groups of mineral oil bases, you will see that highly refined oils provide greater benefits in terms of thermal stability, oxidation stability, pour point, operating temperature, and viscosity index. But the oil starts to show some key weaknesses, affecting additive solubility and oils biodegradability.

Group 4 contains only one type of synthetic oil called polyalphaolefin (PAO), these synthetically created hydrocarbons are the most widely used base oils from the synthetic category. They are created using the polymerization process that gives an olefinic tail by the introduction of ethylene gas. This process makes the chemical structure of PAOs quite similar to that of highly refined mineral oils from Group 3. While PAOs lack in lubricity, additive solubility, film strength and seal shrinkage, they have powerful advantages such as superior oxidation stability, high viscosity index, lower volatility and excellent performance in high and low temperatures. PAOs are employed widely for lubrication; they are especially preferred when the equipment is expected to reach higher temperatures.

Group 5 contains all the remaining oil bases which are mostly synthetics. Most common oils that belong to this group are polyolesters, diesters, polyalkylene glycols, silicones and, phosphate esters. Group 5 contains all the remaining oil bases which are mostly synthetics. Most common oils that belong to this group are polyolesters, diesters, polyalkylene glycols, silicones and, phosphate esters.

SR. NO.	VISCOSITY GRADE TEST		METHOD	8	IP LLP-12	15	20	N150 LUB-32	50	68	N500 LUB-100
	DENSITY @ 29.5°C, G/ML	RANGE		0.810	0.815	0.820	0.821	0.825	0.825	0.845	0.850
		TYPICAL		0.842	0.855	0.860	0.860	0.865	0.870	0.880	0.860
				0.816	0.821	0.835	0.827	0.847	0.835	0.853	0.854
1	KINEMATIC VISCOSITY, CST AT 40°C		ASTM D 445	8.5	12.9	15.5	20	32	49	70	100
2	KINEMATIC VISCOSITY, SUS AT 40°C		ASTM D 2161	56	72	85	104	152	245	340	500
3	REFRACTIVE INDEX @ 20°C		ASTM D 1218	1.476	1.476	1.4764	1.4765	—	—	—	1.4775
4	CLOUD POINT °C MAX		ASTM D 97	-12	-9	-9	-9	-6	-6	-6	-6
5	POUR POINT °C MAX		ASTM D 97	-39	-24	-24	-15	-18	-18	-15	-12
6	FLASH POINT °C Min		ASTM D 92	156	166	174	186	210	240	246	248
7	COLOUR, SAYBOLT		ASTM D 156	30	30	30	30	30	30	30	30
8	VISCOSITY INDEX (VI)		ASTM D 2270	90 MIN	95 MIN	95 MIN	98 MIN	105 MIN	99 MIN	95 MIN	95 MIN



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



PRODUCT LIST

PETROLEUM & HYDROCARBON SOLVENTS

MINERAL TURPENTINE OIL

CODE : SOL-MTO-001

MTO is a mixture of Aliphatic, Open-Chain or Alicyclic C7 to C12 Hydrocarbon

Also known as **WHITE SPIRIT & PETROLEUM SPIRITS**

MTO is insoluble in water

INDUSTRIAL USES OF MTO:-

MTO is Used as an extraction solvent, as a cleaning solvent, as a degreasing solvent and as a solvent in Aerosols, Paints, Wood preservatives, Lacquers, Varnishes, and Asphalt products MTO is mainly used as Raw Material for paints / varnishes. MTO is also used for dry cleaning and other industrial cleaning purposes.



SR. NO.	PARAMETER	TEST METHOD	UNIT	LIMITS	TEST RESULT
1	APPEARANCE	VISUAL	-	CLEAR AND BRIGHT. FREE	CLEAR AND BRIGHT
2	COLOUR (SAYBOLT)	IS 1448 P:14	-	MIN 21	30
3	DENSITY AT 15°C	IS 1448 P:16	g/mL	TO REPORT	0.7892
4	DENSITY AT 15°C, TOP	IS 1448 P:16	g/mL	TO REPORT	0.7892
5	DENSITY AT 15°C, MIDDLE	IS 1448 P:16	g/mL	TO REPORT	0.7892
6	DENSITY AT 15°C, BOTTOM	IS 1448 P:16	g/mL	TO REPORT	0.7892
7	COPPER STRIP CORROSION FOR 3 H AT 50°C	IS 1448 P:15	-	Not more than no. 1	1B
8	DIST: INITIAL BOILING POINT	IS 1448 P:18	°C	MIN 125.0	147
9	DIST: 50 PERCENT RECOVERY V/V	IS 1448 P:18	°C	TO REPORT	175.1
10	DIST: 95 PERCENT V/V, RECOVERY	IS 1448 P:18	°C	TO REPORT	194.5
11	DIST: FINAL BOILING POINT	IS 1448 P:18	°C	MAX 240.0	206.4
12	FLASH POINT, ABEL	IS 1448 P:20	°C	MIN 30.0	35.5
13	RESIDUE ON EVAPORATION	IS 1448 P:29	mg/100ml	MAX 5.0	2
14	AROMATIC CONTENT	IS 1448 P:23	% v/v	MAX 40.0	23.3



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



PRODUCT LIST

PETROLEUM & HYDROCARBON SOLVENTS

NAPHTHA

CODE : SOL-MTO-001



Naphtha is a flammable liquid hydrocarbon mixture. Mixtures labelled naphtha have been produced from natural gas condensates, petroleum distillates, and the distillation of coal tar and peat.

Naphtha is a liquid hydrocarbon mixture which is said to be highly flammable. It is utilized as a solvent in various human industries and is quite volatile. We use it as a fuel for most of the industrial uses.

Furthermore, one needs to understand that it is not just one liquid but a term for defining a wide category of chemicals. The common thing about this is that each of it has a potentially dangerous solution of hydrocarbons.

It is quite an old chemical that was discovered before the first century A.D. The three different types of naphtha include coal tar, petroleum, and shale.

Each of these creates under varying conditions and also serves for different uses because of its chemical properties. The crude oil distillation is responsible for producing it.

USES OF NAPHTHA

On the whole, we use it in three major ways. One is for the industrial uses, then as a solvent and finally as a fuel. As it is a large class of chemicals, it applies to various industries. However, it does have health and environmental concerns of its own.

INDUSTRIAL USE

In industrial use, naphtha serves as a raw material for producing plastics like polyethene and polypropylene. Moreover, the different naphtha chemicals are also used as a raw material for generating petrochemicals containing gasoline and butane.

SR. NO.	PARAMETER	TEST METHOD	UNIT	LIMITS	TEST RESULT
1	APPEARANCE	VISUAL	-	CLEAR AND BRIGHT. FREE	CLEAR AND BRIGHT
2	COLOUR (SAYBOLT)	IS 1448 P:14	-	MIN 21	30
3	DENSITY AT 15°C	IS 1448 P:16	g/mL	TO REPORT	0.7892
4	DENSITY AT 15°C, TOP	IS 1448 P:16	g/mL	TO REPORT	0.7892
5	DENSITY AT 15°C, MIDDLE	IS 1448 P:16	g/mL	TO REPORT	0.7892
6	DENSITY AT 15°C, BOTTOM	IS 1448 P:16	g/mL	TO REPORT	0.7892
7	COPPER STRIP CORROSION FOR 3 H AT 50°C	IS 1448 P:15	-	Not more than no. 1	1B
8	DIST: INITIAL BOILING POINT	IS 1448 P:18	°C	MIN 125.0	147
9	DIST: 50 PERCENT RECOVERY V/V	IS 1448 P:18	°C	TO REPORT	175.1
10	DIST: 95 PERCENT V/V, RECOVERY	IS 1448 P:18	°C	TO REPORT	194.5
11	DIST: FINAL BOILING POINT	IS 1448 P:18	°C	MAX 240.0	206.4
12	FLASH POINT, ABEL	IS 1448 P:20	°C	MIN 30.0	35.5
13	RESIDUE ON EVAPORATION	IS 1448 P:29	mg/100ml	MAX 5.0	2
14	AROMATIC CONTENT	IS 1448 P:23	% v/v	MAX 40.0	23.3



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



PRODUCT LIST

PETROLEUM & HYDROCARBON SOLVENTS



C9 SOLVENT

CODE : SOL-C9-003

The products will serve a broad range of industries and applications like Paints and Coatings, Printing Inks and Reducers, Offset inks, Agro-chemicals, Surfactants, Emulsifiers, Oil Field Chemicals, Foundry Chemicals, Water Treatment Chemicals, Disinfectants, Wash Oils,, etc. The emphasis is on significant value addition through development of specialty chemicals and niche products.

SR. NO.	PARAMETER	TEST METHOD	UNIT	LIMITS	TEST RESULT
1	Specific gravity at 15.6°C	ASTM D4052	----	0.90 - 0.95	55
2	Flash point (PMCC)	ASTM D93	°C	32 - 66	160
3	Distillation range IBP	ASTM D86	°C	150 Min	238
4	Distillation-FBP	ASTM D86	°C	270 Max	460
5	Sulphur	ASTM D5453	wt ppm	To Report	0.942



C9 PLUS SOLVENT

CODE : SOL-C9P-004

The products will serve a broad range of industries and applications like Paints and Coatings, Printing Inks and Reducers, Offset inks, Agro-chemicals, Surfactants, Emulsifiers, Oil Field Chemicals, Foundry Chemicals, Water Treatment Chemicals, Disinfectants, Wash Oils,, etc. The emphasis is on significant value addition through development of specialty chemicals and niche products.

SR. NO.	PARAMETER	TEST METHOD	UNIT	LIMITS	TEST RESULT
1	Specific gravity at 30°C	ASTM D4052	-	0.86 - 0.88	0.865
2	Initial Boiling Point (IBP)	ASTM D86	-	190.0 Min	183
3	Flash Point	ASTM D86	°C	38	38
4	Mixed Aniline Point	ASTM D611	°C	13	37
5	Aromatic Content	007(GC)	Wt%	99	99
6	Appearance	Visual	-	To Report	None
7	Colour	2	APHA	To Report	25
8	Distillation Range	ASTM D86	°C	165	160



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



PRODUCT LIST

PETROLEUM & HYDROCARBON SOLVENTS

C10 SOLVENT

CODE : SOL-C10-005

C10 solvent is a high boiling point (181-205 °C) aromatic hydrocarbon solvent used mainly in paints and coatings, printing inks, and the agrochemical industry. It has a flash point and evaporation rate higher than that of Xylene and therefore imparts better flow and film formation making it useful in the paint and coatings industry. It also has no ethyl-benzene content and is therefore desired for environmentally friendly agrochemical and pesticide formulations.

C10 Solvent is a resin blend stock for foundries and has down hole applications in oilfields. It is also ideal for use in process additive fluids such as chloro-rubber formulations, synthetic resins, and oil-modified alkyds.



SR. NO.	PARAMETER	TEST METHOD	UNIT	LIMITS	TEST RESULT
1	Specific gravity at 15.6°C	ASTM D4052	g/cm ³	0.86 - 0.88	0.892
2	Appearance	Usual	°C	-	Water White
3	Distillation IBP	ASTM D86	°C	°C. 150 Min	162
4	Distillation FBP	ASTM D86	-	°C. 270 Max	204
5	Mixed Aniline Point	ASTM D611	ppm(m)	°C. 16 Max	12.6
6	Total Aromatics	G.C	-	98.5% Min	



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



BENZENE

C₆H₆

CODE : AR-BEN-001

What is Benzene? Benzene is an aromatic organic hydrocarbon with the formula C₆H₆. It is the parent compound of many aromatic compounds. The presence of benzene can be recognized by its characteristic odor. Structure of Benzene - Eilhardt Mitscherlich, a German chemist heated benzoic acid with lime and produced benzene.

Benzene is considered to be one of the most important organic compounds which have a chemical formula C₆H₆. Benzene is considered the parent compound of a lot of aromatic compounds. Benzene is one of the simplest organic compounds and aromatic hydrocarbons. It is also one of the elementary petrochemicals and is one of those natural constituents of crude oil. It has an odor like gasoline and is a liquid that is colorless. Benzene is one of the highly toxic compounds and carcinogenic in nature. Primarily it is being used in the production of polystyrene.

Benzene is considered one of the naturally occurring substances which are produced by volcanoes and by forest fires and is present in many plants and animals, but benzene is also one of the major industrial chemicals which is made from coal and oil.

Benzene is a clear and colorless liquid as it is a pure chemical. In many industries, benzene is being used to make other chemicals along with other types of plastics, pesticides, and detergents. Benzene is also considered a component of gasoline.



WHY SOURCE BENZENE FROM M. ENGLE?

CONSISTENT QUALITY :

Reliable product specifications for industrial applications.

INDUSTRIAL SUPPLY :

Suitable for bulk and commercial petrochemical requirements.

QUALITY ASSURANCE :

Product supplied according to agreed commercial specifications.

DEPENDABLE SOURCING :

Focused on consistent supply and professional order fulfilment.

PROPERTY	SPECIFICATION
Product	Benzene
Chemical Formula	C ₆ H ₆
Product Code	AR-BEN-001
Appearance	Clear, Colourless Liquid
Product Type	Aromatic Hydrocarbon
Grade	As per Agreed Specification
Packaging	Bulk / Industrial Packaging
Application	Petrochemical & Chemical Manufacturing



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



PRODUCT LIST

AROMATIC PETROCHEMICALS



TOLUENE/ TOLUOL

CODE : AR-TOL-002

Toluene is a naturally occurring compound. Toluene is primarily derived from petroleum or petrochemical processes. It is a very common component in substances like gasoline, glues, and other products. Toluene is a liquid that is colourless, water-insoluble and smells similar to paint thinners.

WHAT IS TOLUENE?

Toluene is also known as toluol. Toluene is an aromatic hydrocarbon. It is a mono-substituted benzene derivative and consists of a methyl group i.e., CH₃ that is attached to a phenyl group. The systematic IUPAC name of toluene is methylbenzene.

Toluene is predominantly in use as an industrial feedstock and a solvent. It is a common solvent like paints, paint thinners, silicone sealants, many chemical reactants, rubber, printing ink, adhesives (glues), lacquers, leather tanners, and disinfectants. Toluene is also in use as a recreational inhalant. Toluene has the capability of causing severe neurological harm to our body.

USES OF TOLUENE

The precursor to benzene and xylene

Toluene is primarily in use as a precursor to benzene via hydrodealkylation:



The other application involves its disproportionation to a mixture of benzene and xylene.

NITRATION

Nitration of toluene gives mono-, di-, and trinitrotoluene, all of which are broadly in use. Dinitrotoluene is the precursor to toluene diisocyanate. It is in use for the manufacture of polyurethane foam. Trinitrotoluene is the explosive typically abbreviated as TNT.

OXIDATION

Benzoic acid and benzaldehyde are manufactured commercially by partial oxidation of toluene with oxygen. The catalysts include cobalt or manganese naphthenates.

FUEL

Toluene is in use as an octane booster in gasoline fuels for internal combustion engines as well as jet fuel. Toluene at 86 per cent by volume fuelled all the turbocharged engines in Formula One during the 1980s. It was first pioneered by the Honda team. The rest 14 per cent was a fülle of n-heptane. It is to reduce the octane to meet Formula One fuel restrictions.

Toluene at 100 per cent is in use as a fuel for both two-stroke and four-stroke engines. Due to the density of the fuel and other factors, the fuel does not vaporize easily unless it is preheated to 700C or 1580F. Honda solved this problem cars by routing the fuel lines through a heat exchanger in their Formula One. It was done by drawing energy from the water in the cooling system to heat the fuel.

In Australia, toluene was found to have been illegally mixed with petrol in fuel outlets for sale as it was meant as a standard vehicular fuel. Toluene incurs no fuel excise tax, though other fuels are taxed at more than 40percent. It provides a greater profit margin for fuel suppliers.



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN

CRUDE BENZOL

CODE : AR-CBZ-003

Crude benzol is produced during carbonisation of coking coal. Benzol, also called as benzole, is the name.

normally applied in the chemical industry to a mixture of hydrocarbons of the benzene series.



Sr. No.	PARAMETER	TEST METHOD	UNIT	TEST RESULT
1	Specific Gravity 15.56°C	ASTM D 7504 18	N/A	0.85-0.88
2	Benzene	By GC	%	0.75-0.85
3	Toluene	By GC	%	0.10-0.12
4	Total Xylene	By GC	%	0.3-0.5
5	Sulphur	ASTM D 4629	Mg/Kq	5000 Max
6	Nitrogen	ASTM D 4629	Mg/Kq	2000 Max
7	Organic Chloride	ASTM D 4629	Mg/Kq	



GOVT. AUTHORIZED
SUPPLIER



QUALITY
ASSURED



INDUSTRY
TRUSTED



PERFORMANCE
DRIVEN



M. ENGLE TRADERS



BRANCH OFFICE (AHMEDABAD) :

A622, Moneyplant Hightstreet, Jagatpur road, Sarkhej-Gandhingar Highway,
Nr. BSNL office, Ahemedabad - 382470 (GUJARAT-INDIA)



REGISTERED OFFICE (INDORE) :

B-102 Samarth Park Behind Dmart Mhow Indore 453441 (MADHYA PRADESH-INDIA)



+91 82003 91131



sales@menglepetro.com



www.menglepetro.com