
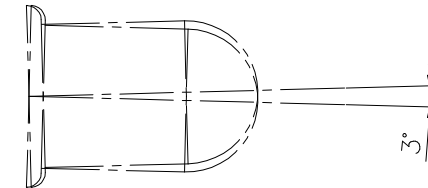
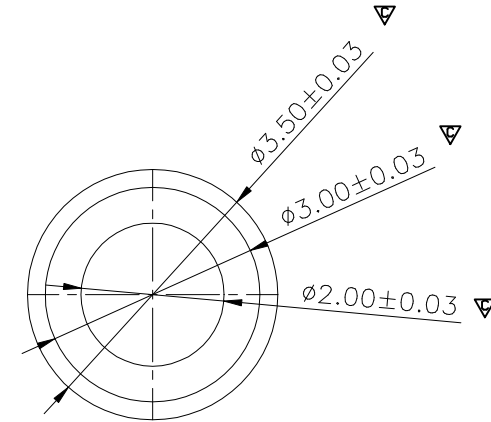


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			NEW	1/21'15	xiang

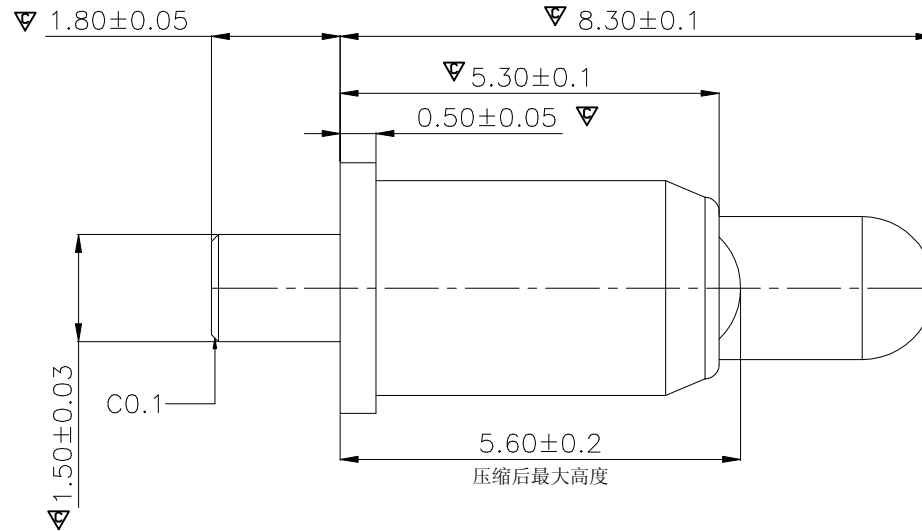

NOTE:

PRODUCT TO BE MET ROHS

1. MATERIAL

PLUNGER:BRASS,1u"GOLD PLATING 50u"MIN.NICKEL UNDERPLATED.

BARREL:BRASS,1u"GOLD PLATING OVER 50u"MIN.NICKEL UNDERPLATED

SPRING:镀铜弹簧电镀1u"金

2.SPECIFICATION:

ELECTRICAL.

CURRENT RATNG:12VDC,2A

CONTACT RESISTANCE :50mΩ Max.

ENVIRONMENTAL:

TEMPERATURE RANGE:-40~85°C

3.MECHANICAL FUNCTION:

SPRING PROBE FORCE:

WORKING STROKE:150g±30g AT 2.0mm RECOMMEND STROE

MAX.STROKE:2.7mm FULL STROKE.

DURABILITY:10,000 CYCLES/2.0mm STROKE

4. " " SHOWS QIP INSPECTION POINT.

5..Pb, Hg, Cr+6, PBB, PBDE各项均<1000 PPM, Cd<100 PPM(ROHS指令豁免除外)

DIM	TOL	DIM	TOL
X.		X"	
X.X	±0.20	X.X"	
X.XX	±0.10	X.XX"	
X.XXX	±0.05	X.XXX"	

WITCHIP
CONNECTOR

深圳市萬昌電子有限公司
SHENZHEN WANCHANG ELECTRONIC CO.,LTD.

DRAW NO.		DATE	MATERIAL: SEE NOTE	DRAW NAME:	
DESIGN:	xiang	1/21'15	FINISH: SEE NOTE	POGO 1PIN 3.5*10.1	
CHECK:			FILE:		
REVIEW:			P/N: 90-01175-001	MODEL:M1375	
APPROVED			REV. A0 SCALE N/A	UNIT: mm	SHEET: 1/1