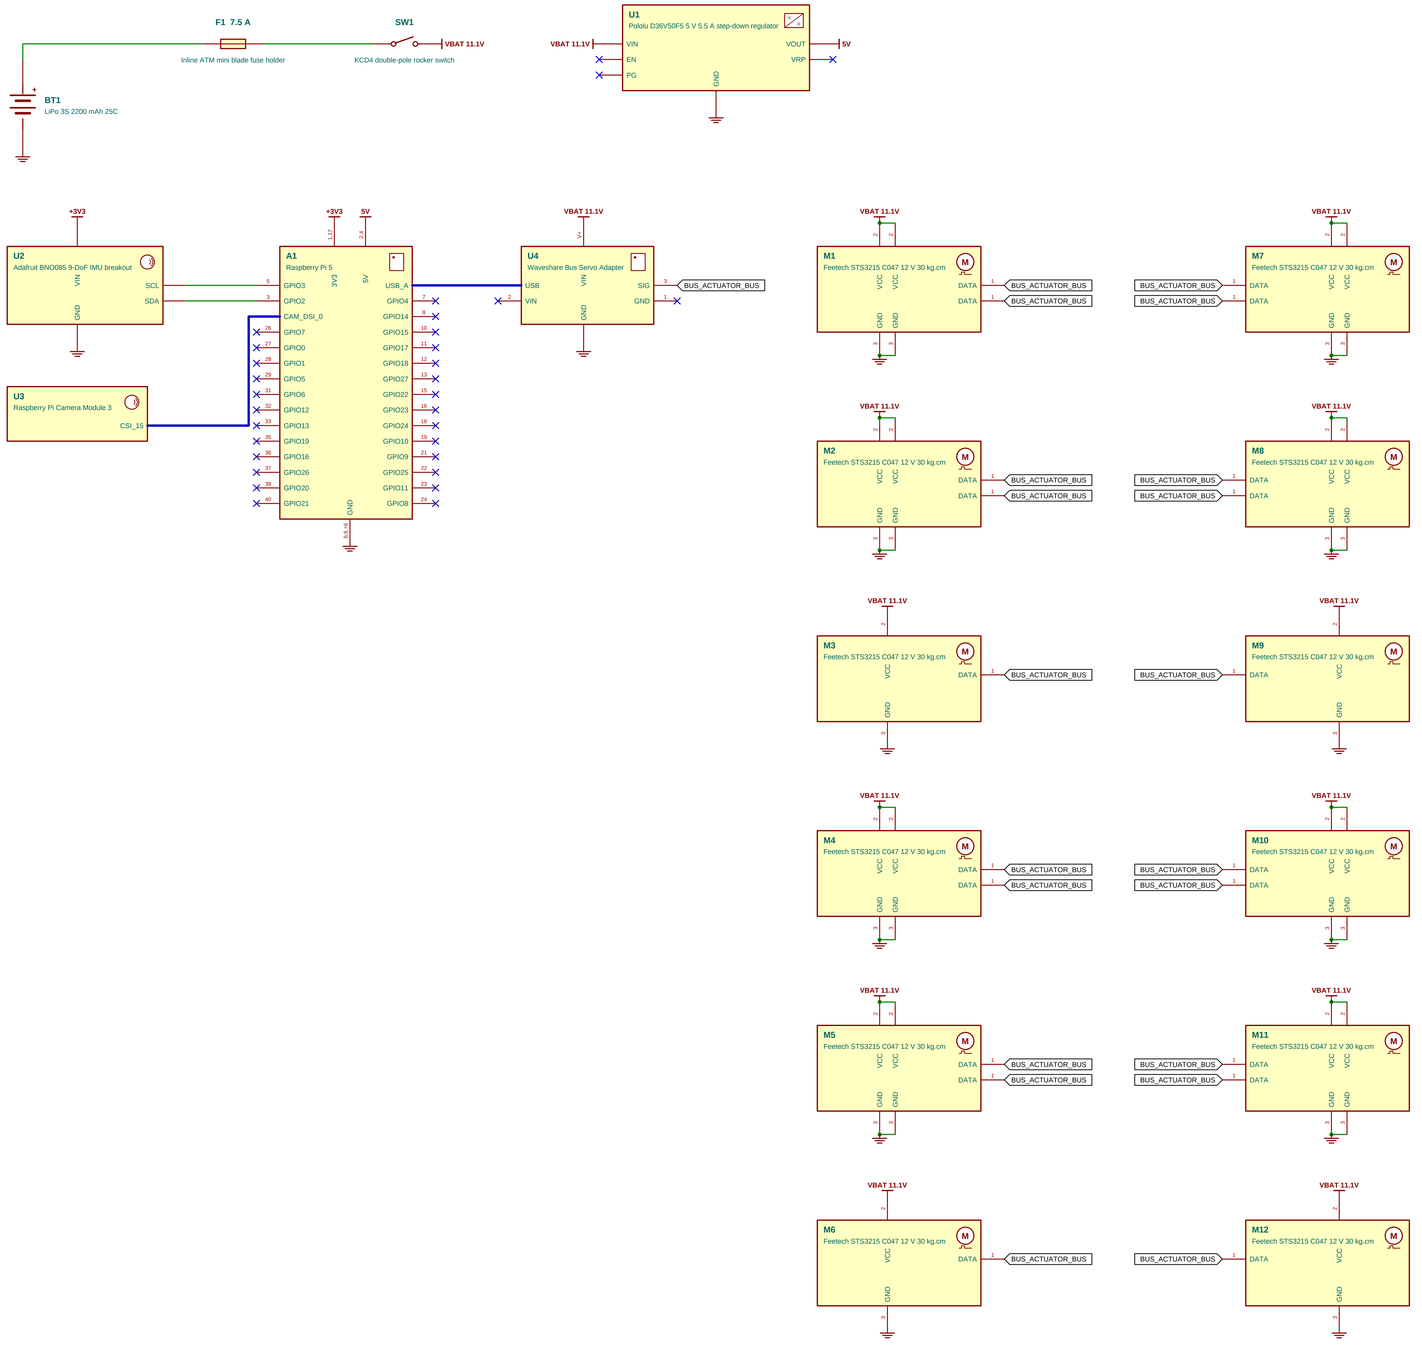

Power rails

VBAT 11.1 V from SW1: load 5.951 A typical, 14.951 A peak; source 35 A cont, 70 A peak; fuse 7.5 A

5V 5 V from U1: load 1 A typical, 5 A peak; source 5.5 A cont, 8 A peak

Fuses: F1 7.5 A (everything on VBAT), F2 2 A (branch regulator_5v), F3 2 A (branch actuator_bus), F4 2 A (branch fl_hip_abduction_actuator), F5 2 A (branch fr_hip_abduction_actuator), F6 2 A (branch rl_hip_abduction_actuator), F7 2 A (branch rr_hip_abduction_actuator). Branch fuses sit inline in the lead they protect.

Lever splices (actuator_bus_hub, star_ground, splice_vbat) are junctions of their nets.

Same net label or power symbol = same conductor. X = pin not connected.

Text to Robot		generated from design.wiring
Title: **quadruped: schematic**		
23 parts, 9 nets, 54 wires, 2 rails		
Size: A1	Rev: 97b9c92f	Sheet 1 / 1
File: schematic.svg	KiCad symbol style	Id: 1/1