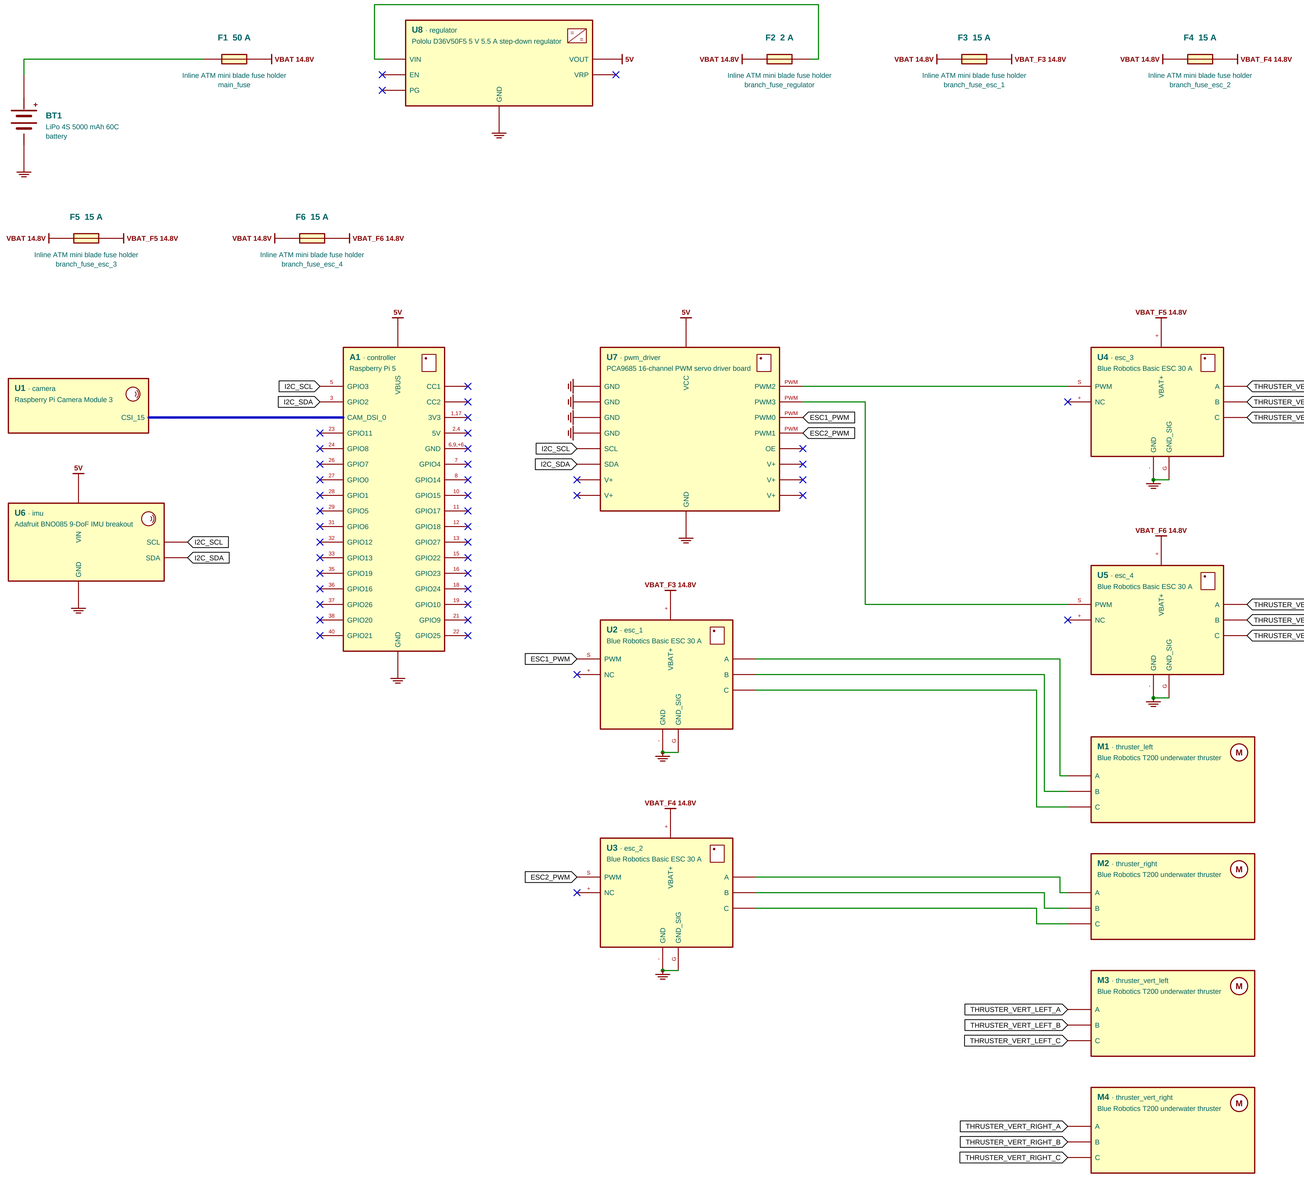

Power rails

VBAT 14.8 V from F1: load 24.485 A typical, 96.485 A peak; source 60 A cont, 120 A peak; fuse 50 A

5V 5 V from U8: load 1.221 A typical, 3.035 A peak; source 5 A cont, 5 A peak

Fuses: F1 50 A (everything on VBAT), F2 2 A (branch regulator), F3 15 A (branch esc_1), F4 15 A (branch esc_2), F5 15 A (branch esc_3), F6 15 A (branch esc_4). Branch fuses sit inline in the lead they protect.

Lever splices (star_ground, splice_vbat, splice_5v) are junctions of their nets.

Same net label or power symbol = same conductor. X = pin not connected.

Text to Robot generated from design.wiring

Title:

underwater_rov: schematic

23 parts, 22 nets, 51 wires, 2 rails

Size: A1	Rev: 5eda42d3	Sheet 1 / 1
File: schematic.svg	KiCad symbol style	Id: 1/1