01 KEY HEAD — POINTS, EDGES, MEASUREMENTS


SCALE 2.5:1 AND 5:1 @ A2 · ALL DIMS IN mm · BLADE FOLDED

MAZDA FLIP KEY

ATENZA 2007 · CALIPER MEASURED


1 FRONT

LOGO FACE TOWARDS YOU · BLADE ON THE RIGHT
BOTTOM EDGE POINTS DOWN IN THE MIDDLE

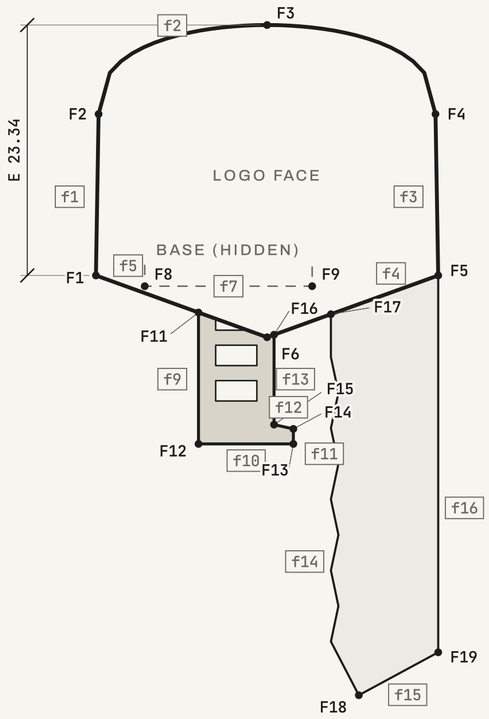


2 BACK

RIVET FACE TOWARDS YOU · BLADE ON THE LEFT
BOTTOM EDGE POINTS UP IN THE MIDDLE

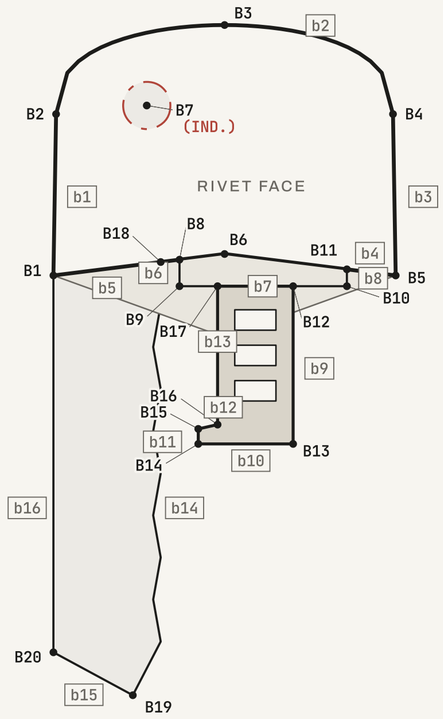


3 SIDE

LOOKING AT THE BLADE SIDE
LOGO FACE LEFT · RIVET FACE RIGHT

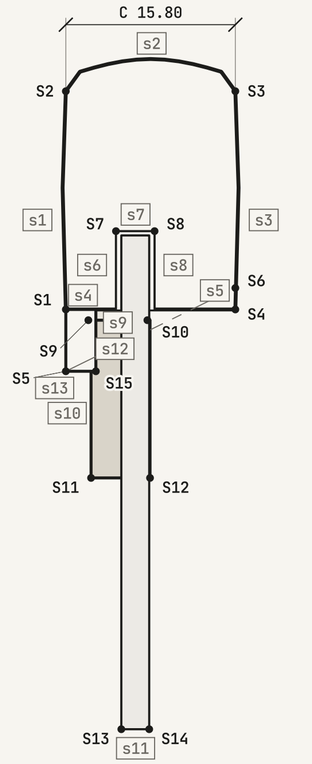

4 BOTTOM

BOTTOM TOWARDS YOU · LOGO FACE DOWN
BLADE ON THE LEFT

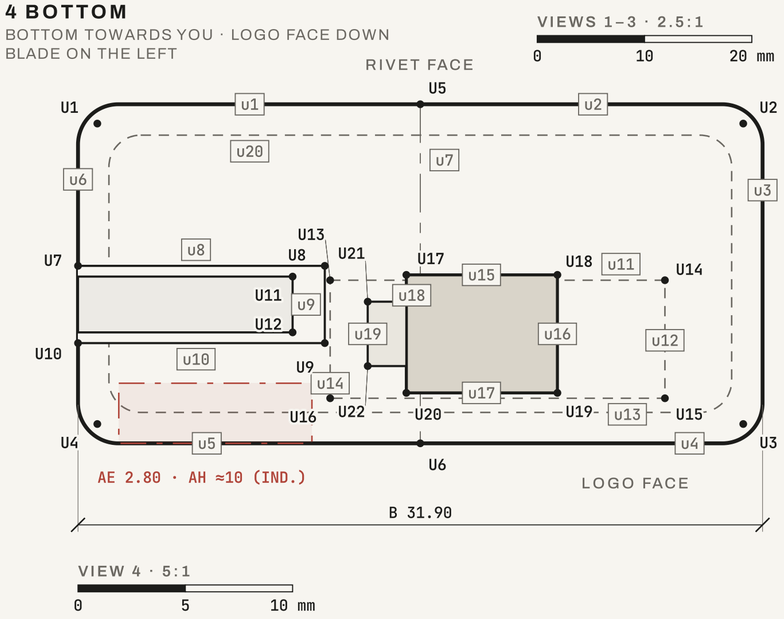

READING THIS SHEET

F1	POINT. A corner or tip. The capital letter is the view: F front, B back, S side, U underside.
f1	EDGE. Lower-case, in a box. Same view letters.
A	MEASUREMENT. Listed in the schedule with the points or edges it runs between.
- - -	HIDDEN. Behind another part in this view.
x y z	x from the blade-side edge · y from the rivet face · z from the dome tip.

OPEN — UNRESOLVED ON THIS SHEET

AE	2.80 was read in a tight spot. The body notch is cut 3.0 deep along the whole logo face. Resolved by FIT TEST v3 A/B/C.
AG	1.53 is taken as the skirt thickness between the 2.80 part and the base. It may be a distance along the width. Re-measure.
AH	Length of the 2.80 part from U4 is about 10. Not used by the body. Re-measure before narrowing the notch.
U3	Skirt thickness on the tab side of the base: TBD.
B7	Rivet position, dome curve and blade profile are drawn approximate. Not used by the body.

MEASUREMENT SCHEDULE

HEAD OUTLINE

A	F2–F4	Width at the top of the straight sides	31.40
B	F1–F5	Width at the bottom corners	31.90
C	u1–u5	Thickness, logo face to rivet face	15.80
D	B3→B6	Dome tip to rivet-face centre (edge points up)	21.34
E	F3→F1	Dome tip to the bottom corners	23.34
S	F3→F6	Dome tip to logo-face centre (edge points down)	29.10
AB	B3→b7	Dome tip to the flat bottom face	24.34
AF	u20→u1	Bottom face set in from the rivet face	1.44
AE	s12–S15	Logo-face skirt thickness at the U4 end	2.80 (IND.)
AG	U16→s12	Between the 2.80 part and the base	1.53 (IND.)
AH	U4→U6	Length of the 2.80 part	≈10 (IND.)

SNAP TAB

F	b7→b10	Tab length, bottom face to tip	14.60
G	F3→f10	Dome tip to tab tip	39.04
H	F11–F16	Tab width, body only	7.04
I	F12–F13	Tab width including the hook	9.00
J	u6→u18	Blade-side edge to tab	15.30
K	u3→u16	Other edge to tab	9.60
L	u15–u17	Tab thickness	5.50
M	u1→u15	Rivet face to tab	7.95

TAB BASE

U	b6→b7	Base below the rivet-face edge	2.25
V	U13–U14	Base width	15.60
W	U14–U15	Base thickness	5.50
X	u6→U13	Blade-side edge to base	11.75
Y	u1→U13	Rivet face to base	8.20

FOLDED BLADE AND GAP

N	F5→F18	Bottom corner to blade tip	39.12
O	f16–f3	Blade to blade-side edge (flush)	0.00
P	F17–f16	Blade width	10.00
Q	S13–S14	Blade thickness	2.60
R	u1→U11	Rivet face to blade	8.03
T	u8–u10	Blade gap width	3.60
Z	u6→u9	Blade gap depth from the blade side	11.50
AA	s4→s7	Blade gap length up the side	7.30

KEYED NOTES

1. **FRONT AND BACK ARE NOT MIRROR IMAGES.** The logo-face edge drops to S in the middle; the rivet-face edge rises to D. Both views are needed.
2. **THE BASE IS HIDDEN FROM THE FRONT.** The logo-face skirt covers it. Tab, base and skirt are one piece with no gap between them.
3. **THE HOOK POINTS AT THE BLADE.** It sets which wall of the socket carries the catch.
4. **THE BLADE SWINGS OUT ON THE RIVET.** The gap is open on the blade side; fully open, the blade points out of the dome top.

3D PRINTS · MAZDA KEY FOB BODY

01 KEY HEAD MEASUREMENT BLUEPRINT

SCALE 2.5:1 (VIEWS 1–3) · 5:1 (VIEW 4) @ A2 · DIMS IN mm

REV C · 2026-10-04 · PALAPYE

STATUS: MEASURED — FIT TEST PENDING