


AC Supply to HVDC

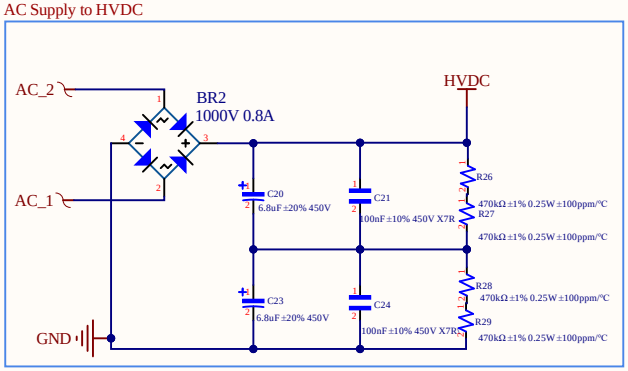


For Voltage Detection

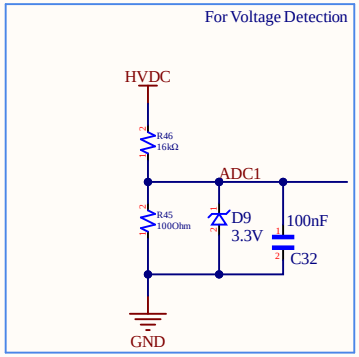



Non Isolated HVDC to 12VDC, 300mA

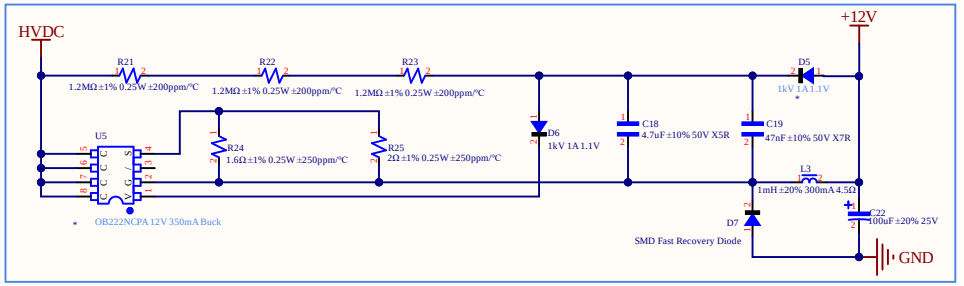


AC Appliance Load On off through relay

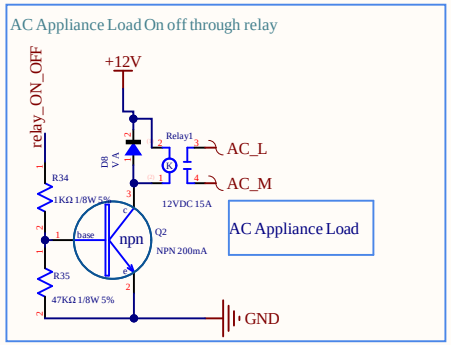


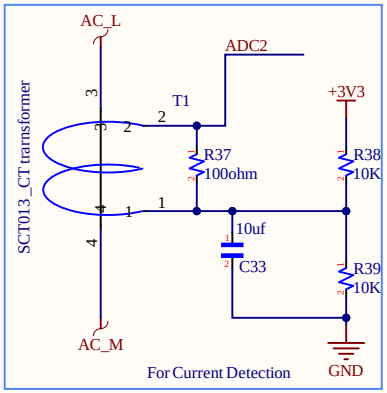

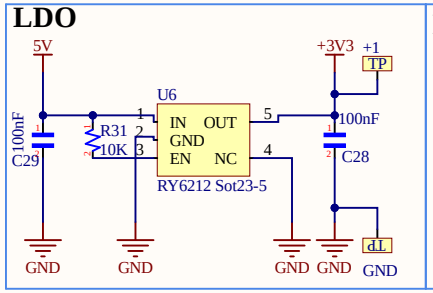


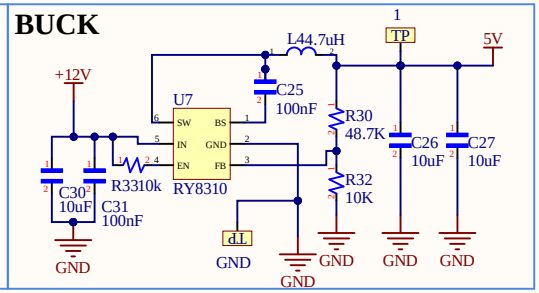


User Interface
Tera Term
or
Real Term



Communication With User Interface
Ground Isolated

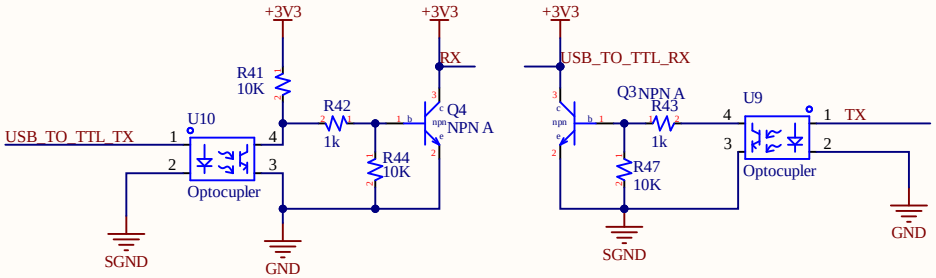

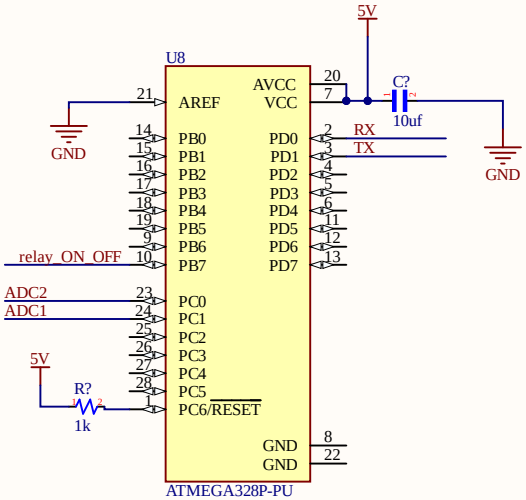

Title: Microcontroller-based Voltage Protector Device that protects electrical appliance		
Size: A4	Number:	Revision:
Date: 10/10/2026		Sheet of
File: C:\Users\..\SurgeProtector.SchDoc		Drawn By: Mehedi Hasan Roni