Exceptions and Interrupts

- "Unexpected" events requiring change in flow of control
  - Different ISAs use the terms differently
- Exception
  - Arises within the CPU
    - e.g., undefined opcode, overflow, syscall, …
- Interrupt
  - From an external I/O controller
- Dealing with them without sacrificing performance is hard

Handling Exceptions

- In MIPS, exceptions managed by a System Control Coprocessor (CP0)
- Save PC of offending (or interrupted) instruction
  - In MIPS: Exception Program Counter (EPC)
- Save indication of the problem
  - In MIPS: Cause register
  - We'll assume 1-bit
    - 0 for undefined opcode, 1 for overflow
- Jump to handler at 8000 00180

An Alternate Mechanism

- Vectored Interrupts
  - Handler address determined by the cause
- Example:
  - Undefined opcode: C000 0000
  - Overflow: C000 0020
  - …: C000 0040
- Instructions either
  - Deal with the interrupt, or
  - Jump to real handler

Handler Actions

- Read cause, and transfer to relevant handler
- Determine action required
- If restartable
  - Take corrective action
  - use EPC to return to program
- Otherwise
  - Terminate program
  - Report error using EPC, cause, …

Exceptions in a Pipeline

- Another form of control hazard
- Consider overflow on add in EX stage

  `add $1, $2, $1`
  - Prevent $1 from being clobbered
  - Complete previous instructions
  - Flush add and subsequent instructions
  - Set Cause and EPC register values
  - Transfer control to handler
- Similar to mispredicted branch
  - Use much of the same hardware

Pipeline with Exceptions

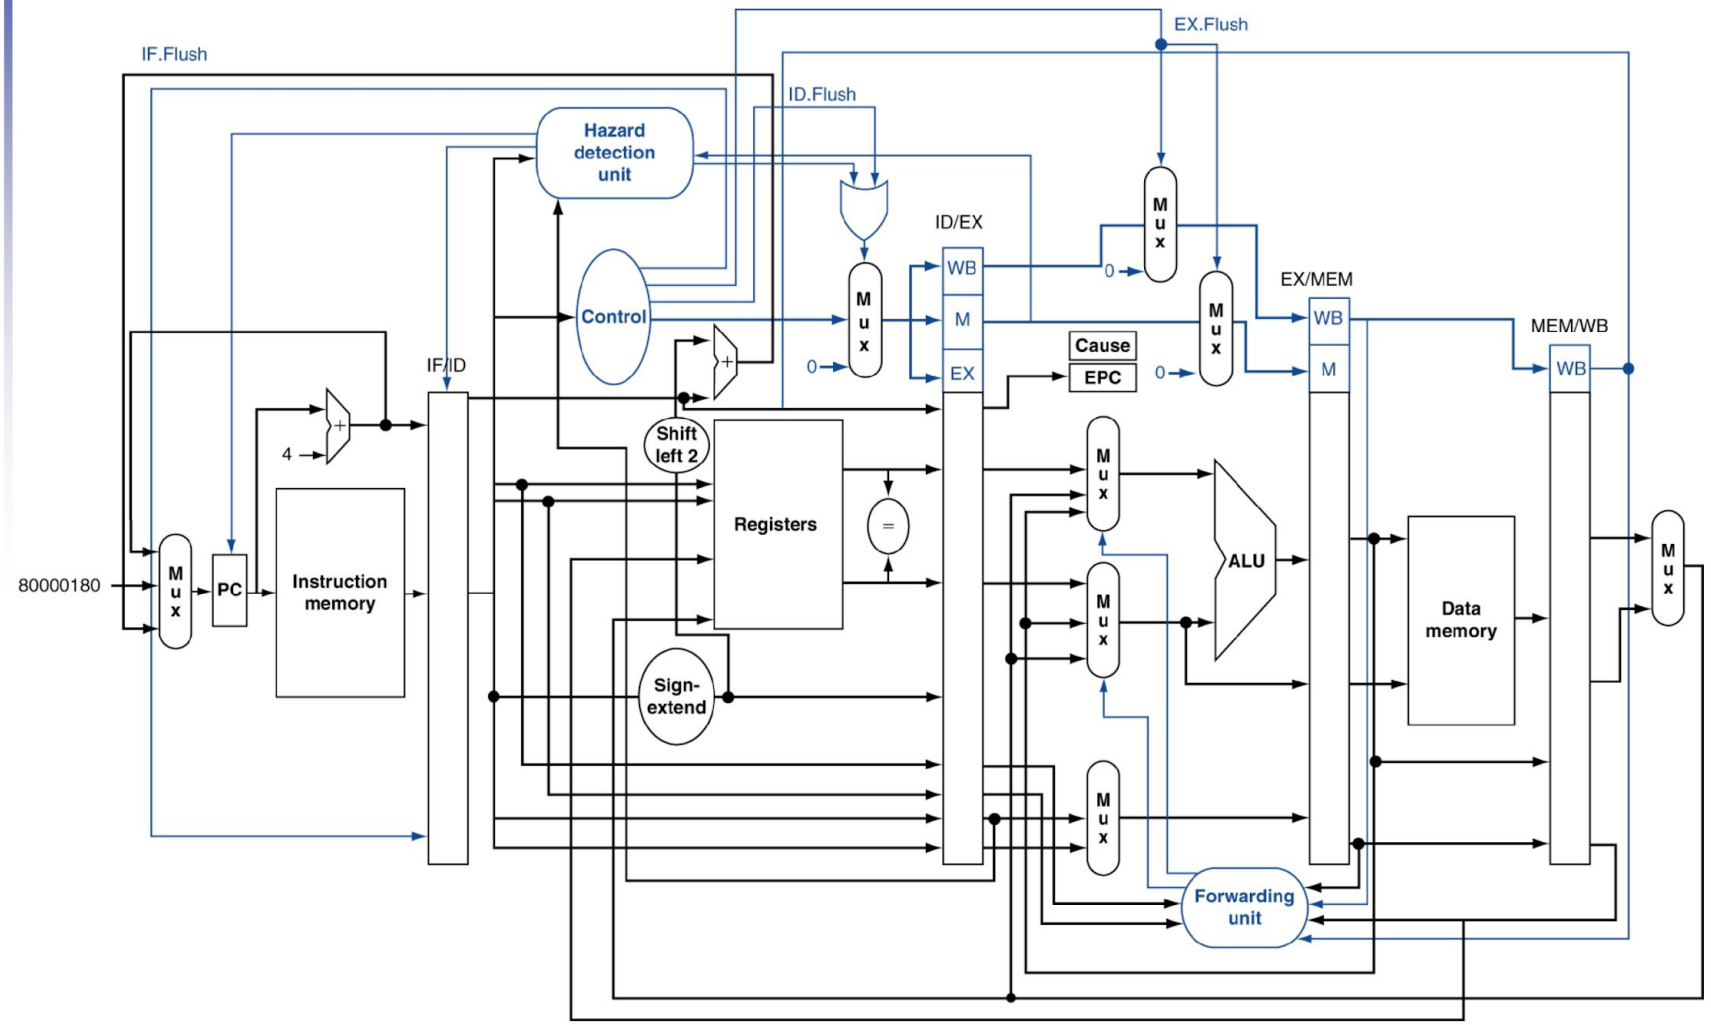

Exception Properties

- Restartable exceptions
  - Pipeline can flush the instruction
  - Handler executes, then returns to the instruction
    - Refetched and executed from scratch
- PC saved in EPC register
  - Identifies causing instruction
  - Actually PC + 4 is saved
    - Handler must adjust

Exception Example

- Exception on add in

```
40      sub   $11, $2, $4
44      and   $12, $2, $5
48      or    $13, $2, $6
4C      add   $1,  $2, $1
50      slt   $15, $6, $7
54      lw    $16, 50($7)
…
```

- Handler

```
80000180    sw    $25, 1000($0)
80000184    sw    $26, 1004($0)
…
```

Exception Example

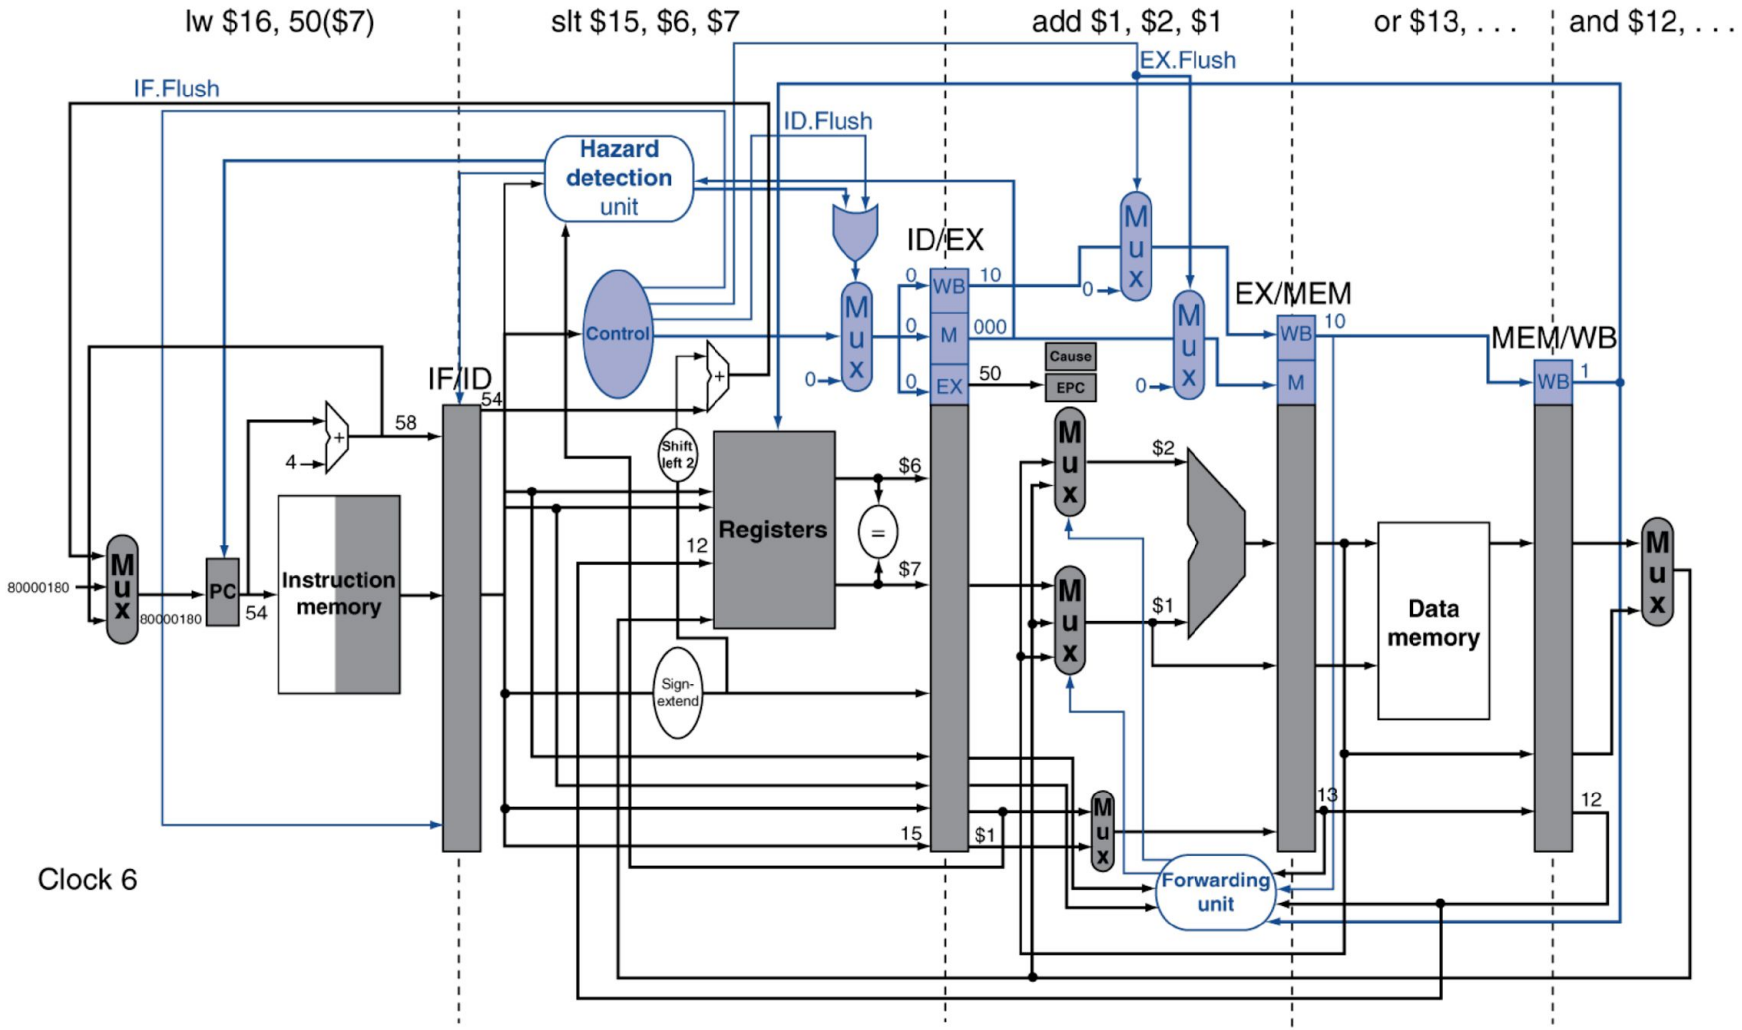

Exception Example

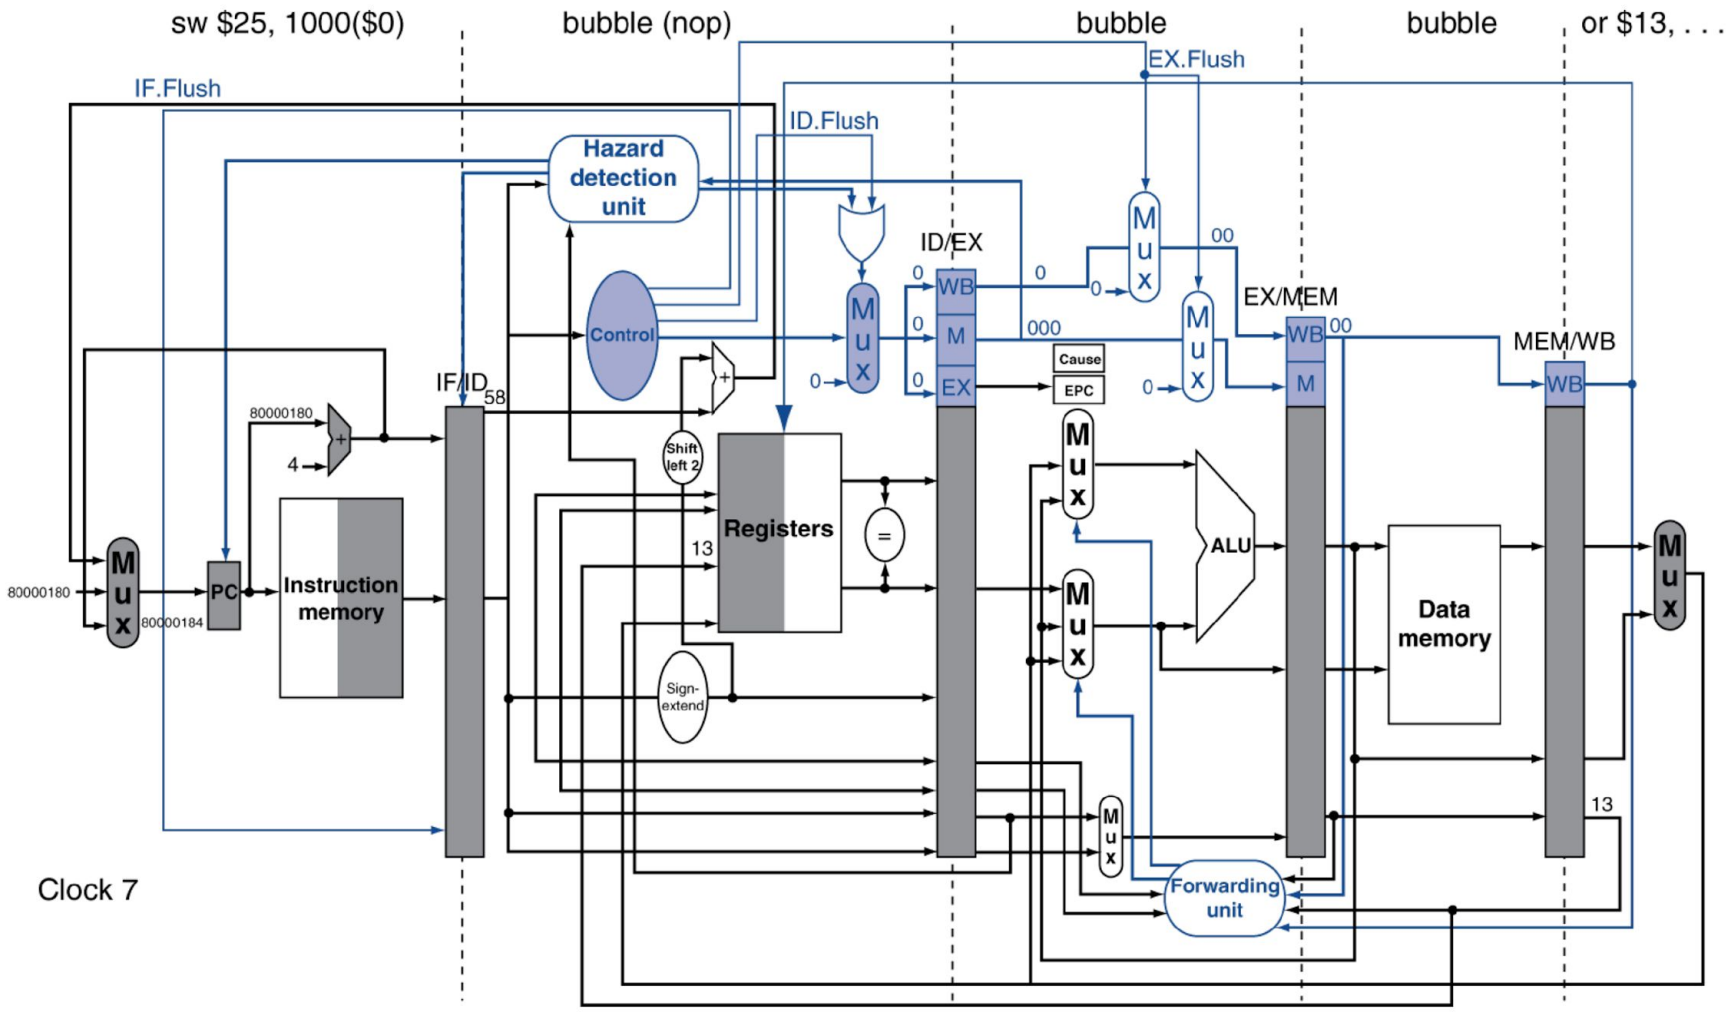

Multiple Exceptions

- Pipelining overlaps multiple instructions
  - Could have multiple exceptions at once
- Simple approach: deal with exception from earliest instruction
  - Flush subsequent instructions
  - “Precise” exceptions
- In complex pipelines
  - Multiple instructions issued per cycle
  - Out-of-order completion
  - Maintaining precise exceptions is difficult!