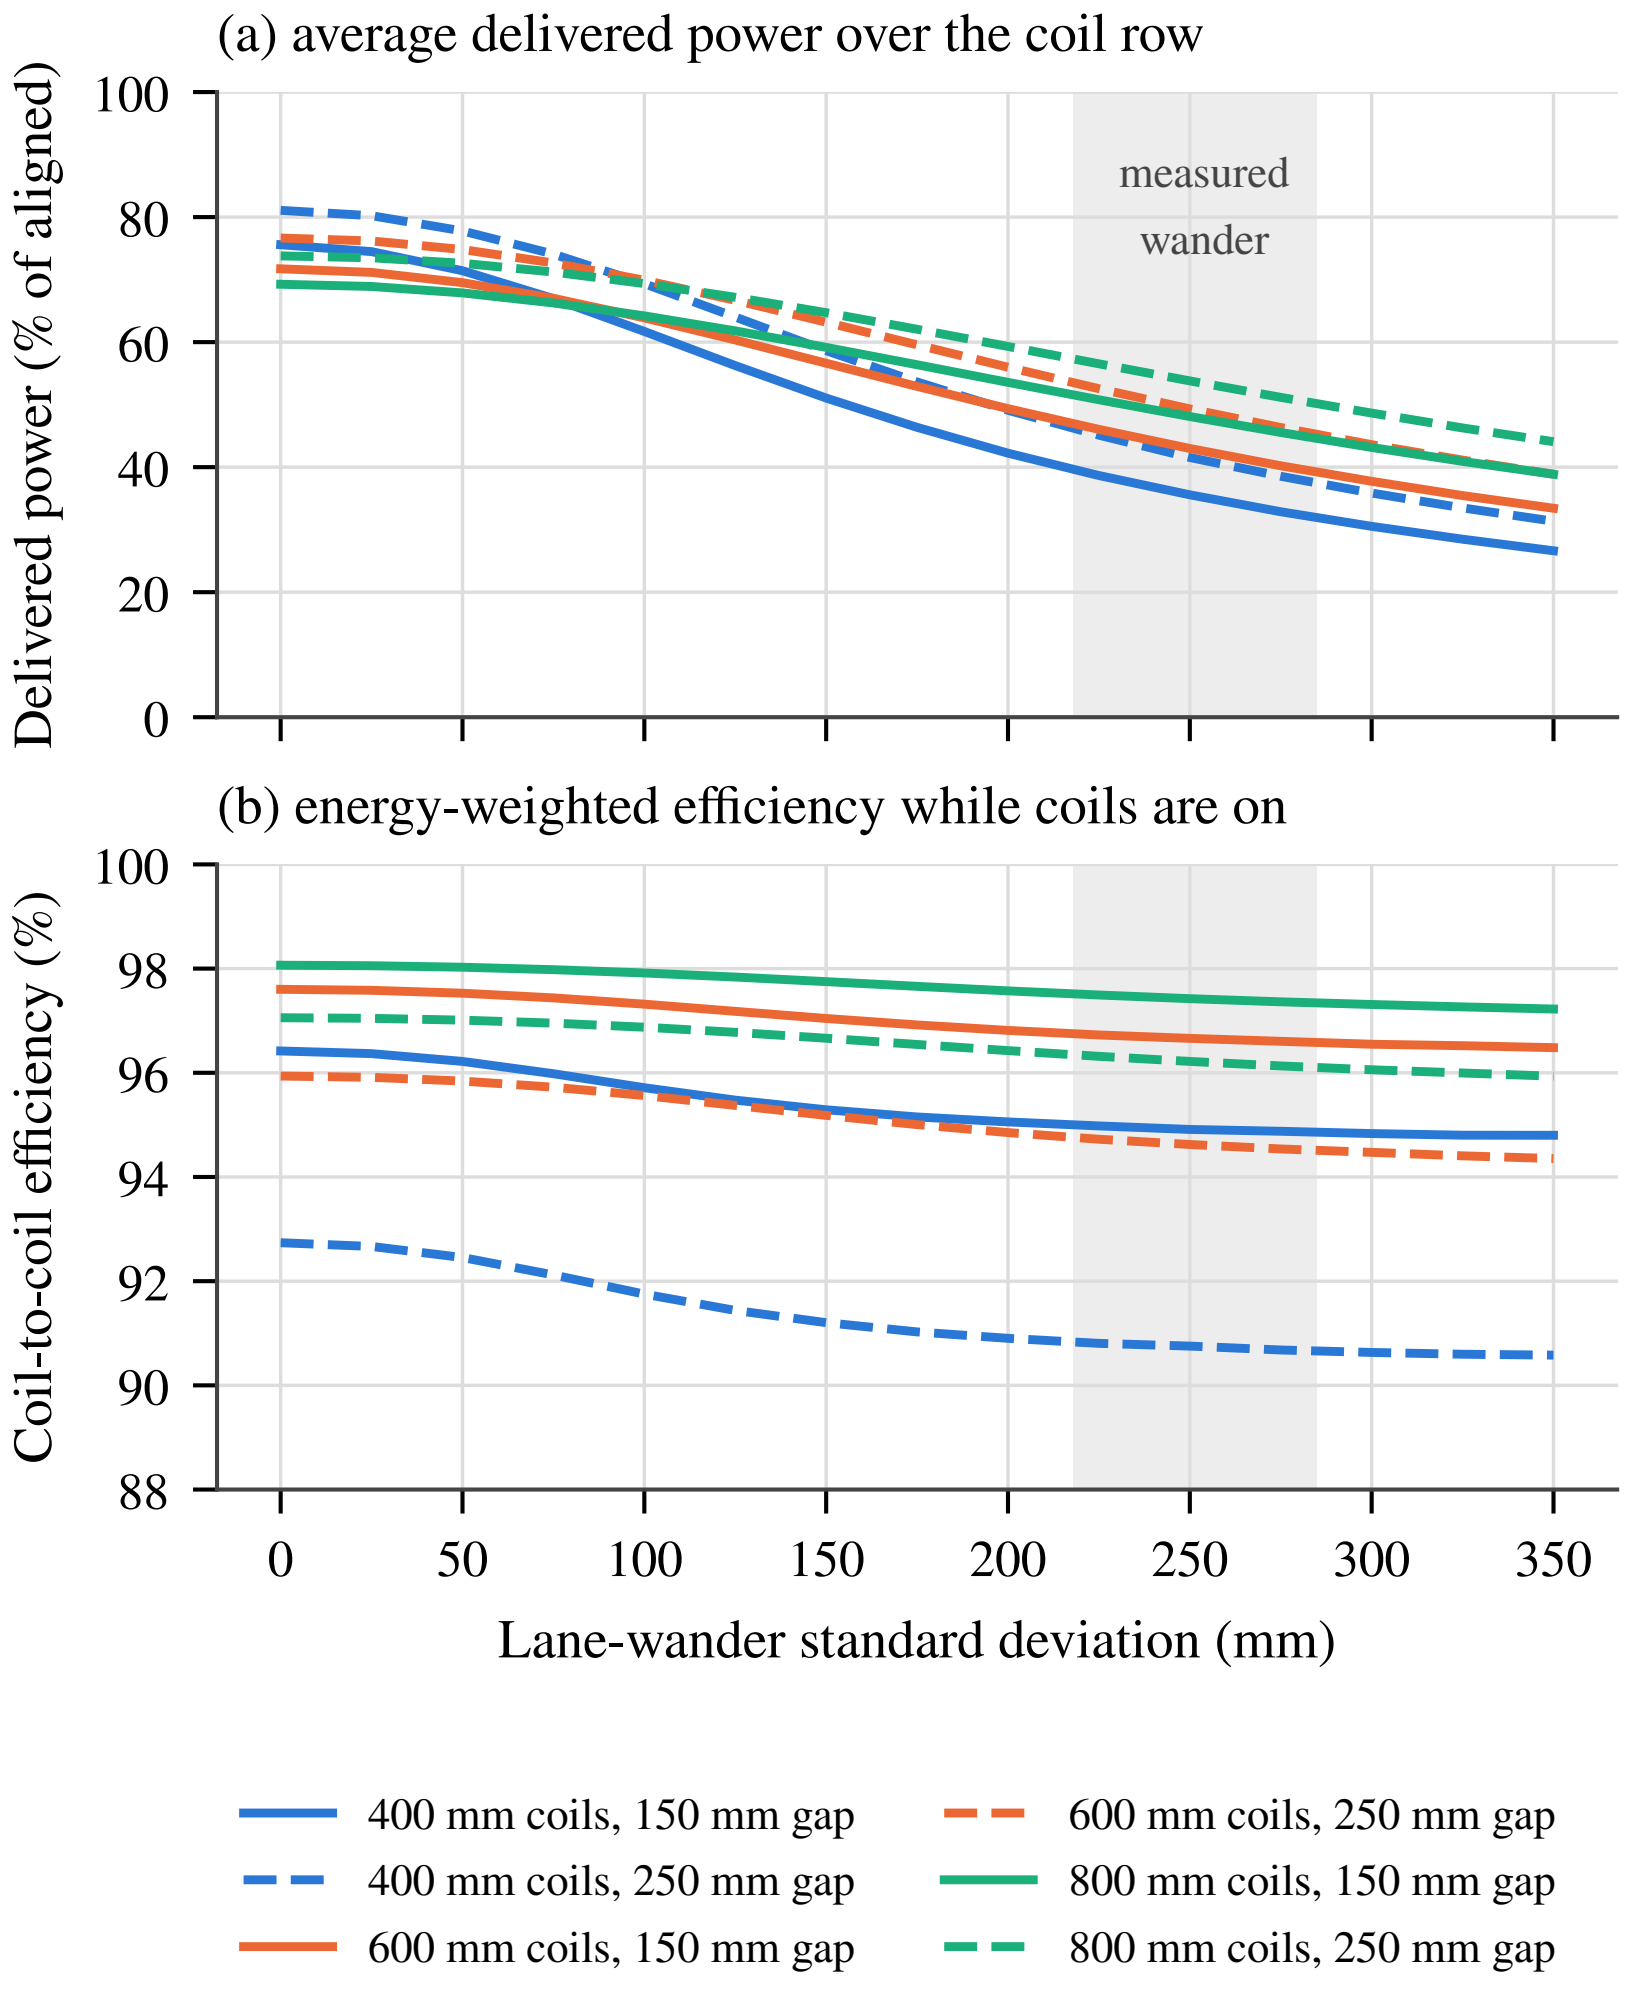
(a) average delivered power over the coil row
Delivered power (% of aligned)
100
80
60
40
20
0
measured
wander
(b) energy-weighted efficiency while coils are on
Coil-to-coil efficiency (%)
100
98
96
94
92
90
88
0
50
100
150
200
250
300
350
Lane-wander standard deviation (mm)
400 mm coils, 150 mm gap
400 mm coils, 250 mm gap
600 mm coils, 150 mm gap
600 mm coils, 250 mm gap
800 mm coils, 150 mm gap
800 mm coils, 250 mm gap