

ME354: Experimental Methods in Fluids Mechanics

Final Project: Bringing Life To Images
Autumn 2013

David Manosalvas
Mehul Oswal

Contents

1	Introduction	2
2	Filter Characteristics	3
2.1	Train Image: Supersonic flow around a sphere	3
3	Sharpness Metric	6
4	Project Summary	7
5	Appendix	8
5.1	Additional Results	8
5.2	Matlab Codes	8
5.2.1	Master script	8
5.3	References	8

Chapter 1

Introduction

Removing noise from an original signal is a challenging problem receiving due attention from researchers. Digital images play an important role in experimental research and images acquired are often blurry and noisy. Thus prior to analyzing image data, denoising and sharpening becomes necessary. This project aims to explore some of the widely used image enhancement algorithms to sharpen images and implement a robust metric to quantify the performance of filters under different blur sources.

Mathematical theory behind image processing:

Blurred images are modeled as the true image convolved with a point spread function plus additive noise. The point spread function (PSF) that convolves the true image is generally a property associated with the optics that have contributed to the blur while noise can be due to poor illuminance, quantization among other sources. Mathematically, a blurry image can be represented as follows

$$v(m, n) = h(m, n) \star u(m, n) + \eta(m, n) \quad (1.1)$$

where, $u(m, n)$ is the true image, $h(m, n)$ is the PSF, $\eta(m, n)$ is the additive noise and $v(m, n)$ is the blurry image. Image sharpening involves calculating an estimate of the true image $\hat{u}(m, n)$ using filters.

$$\hat{u}(m, n) = g(m, n) \star v(m, n) \quad (1.2)$$

Filters calculate function $g(m, n)$ using some knowledge of the PSF causing the blur and an estimate of the signal to noise ratio.

Experimental & Analysis set up:

The experimental and analysis setup for this project is as depicted in the following figure.

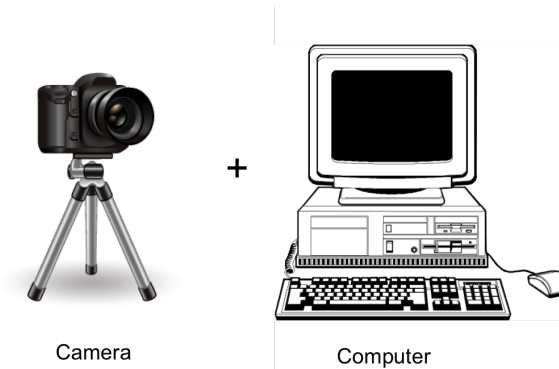


Figure 1.1: Experimental setup consists of a good camera and a computer system. The camera captures images under pre-defined settings like focal length, shutter speed, aperture size and luminance while computer has been used to perform image enhancement & filter analysis.

Chapter 2

Filter Characteristics

Choice of filter is very important in image restoration and restored image characteristics. This part of the project aims to study different filters and compare their enhancement effectiveness and deblur characteristics under various simulated and real image blur phenomenon. Before we present a comparison, let us briefly discuss the different filters studied for the purposes of this project. Various filters compared are,

1. Inverse and Pseudo filter
2. Wiener filter
3. Geometric mean filter
4. Constrained least squares filter

Mathematical formulation of these filters has been presented in the Appendix and will not be discussed here.

2.1 Train Image: Supersonic flow around a sphere

In this simulated motion blur, train image was procured from Van Dyke's Album of Fluid Motion and depicts the formation of shock around a sphere at flow Mach no. 3. This image was blurred using a motion PSF and had Gaussian white additive noise. The blurred image and recovered image are presented below. Filter deblur characteristics follow below.



Figure 2.1: Image enhancement on the blurred image was performed using all the filters. For representative purposes only the sharpened image using Wiener filter has been shown here. Blur PSF used for this simulation represented blur effect due to motion. Variance of the additive noise is of $O(10^{-5})$.



Figure 2.2: Kernel comparison for blur due to motion



Figure 2.3: No reference image enhancement

Chapter 3

Sharpness Metric

Chapter 4

Project Summary

Chapter 5

Appendix

5.1 Additional Results

5.2 Matlab Codes

5.2.1 Master script

5.3 References

- 1.
- 2.