Smart SDN – Experiment Report

EXTREME Run (run #11, single mode)
Started 2026-11-05 06:19:46 · duration 50.4 s · status completed

Summary

Metric	Value
Automatic route changes	2
Average / peak slow-link throughput	1.02 / 5.00 Mbps
Sync RTT while on SLOW path	97.9 ms
Sync RTT while on FAST path (after reroute)	15.9 ms
RTT improvement after reroute	83.8 %
Synchronization packet loss (timeouts)	1.2 %

Per-phase results

Phase	Start (s)	Length (s)	Avg slow Mbps	Peak Mbps	Avg RTT ms	Loss %	SLOW/FAST samples
Baseline	1.1	10.0	0.00	0.00	101.0	0.0	5/0
Extreme	11.1	10.0	4.29	5.00	40.9	6.4	1/4
Recovery	21.1	30.0	0.27	3.96	88.1	0.0	14/1

Controller routing events

Time	Phase	Event
2026-11-05 06:19:59	Extreme	SLOW -> FAST (slow link 4.99 Mbps)
2026-11-05 06:20:09	Recovery	FAST -> SLOW (slow link 0.00 Mbps)

Slow-link throughput (red dashed = reroute threshold)

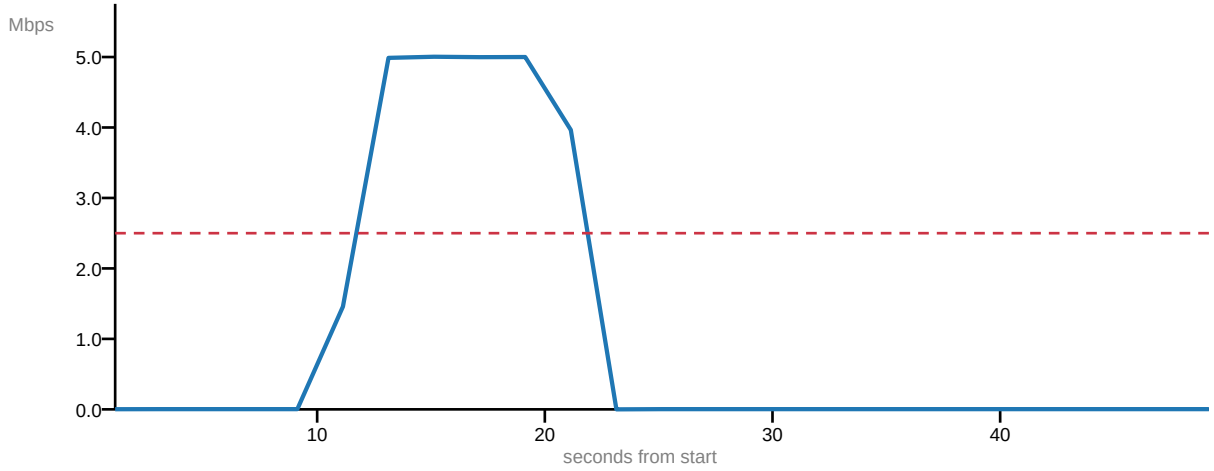

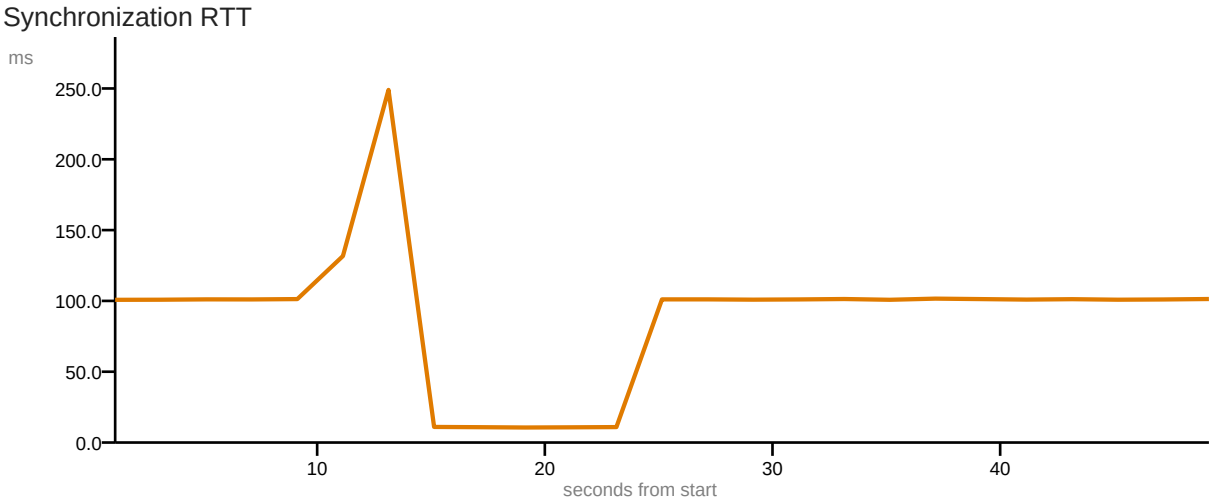

Generated 2026-11-05 06:20:46 by the Smart SDN dashboard. RTT values come from the UDP synchronization clients (h1–h3); throughput is measured by the Ryu controller on the slow link (s1 port 5).