Smart SDN – Experiment Report

High Run (run #10, single mode)
Started 2026-11-05 06:18:04 · duration 50.3 s · status completed

Summary

Metric	Value
Automatic route changes	2
Average / peak slow-link throughput	1.01 / 5.00 Mbps
Sync RTT while on SLOW path	96.6 ms
Sync RTT while on FAST path (after reroute)	20.1 ms
RTT improvement after reroute	79.2 %
Synchronization packet loss (timeouts)	0.8 %

Per-phase results

Phase	Start (s)	Length (s)	Avg slow Mbps	Peak Mbps	Avg RTT ms	Loss %	SLOW/FAST samples
Baseline	1.3	10.0	0.00	0.00	100.8	0.0	5/0
High	11.3	10.0	4.36	5.00	40.4	4.3	1/4
Recovery	21.3	30.0	0.24	3.50	86.8	0.0	14/1

Controller routing events

Time	Phase	Event
2026-11-05 06:18:17	High	SLOW -> FAST (slow link 4.99 Mbps)
2026-11-05 06:18:27	Recovery	FAST -> SLOW (slow link 0.00 Mbps)

Slow-link throughput (red dashed = reroute threshold)

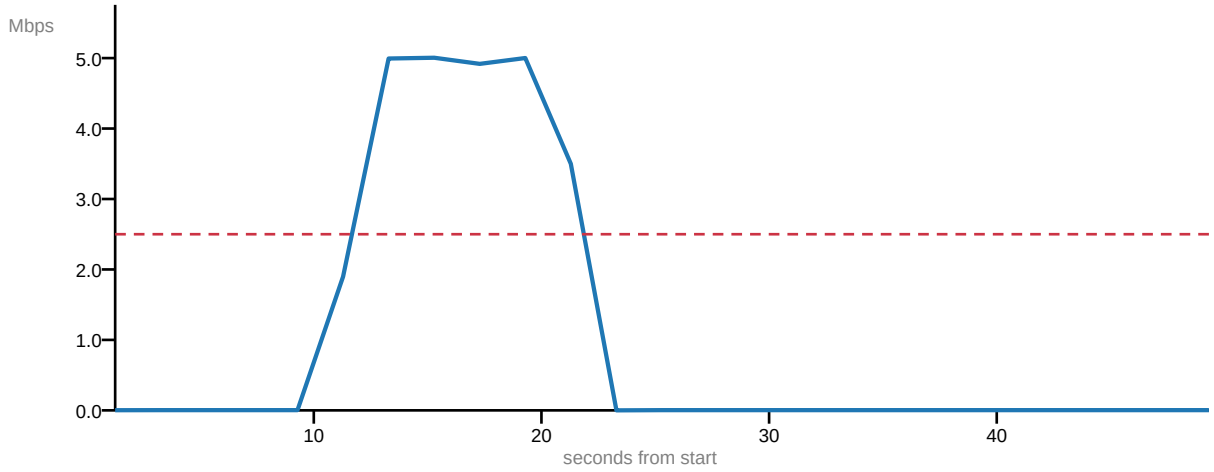

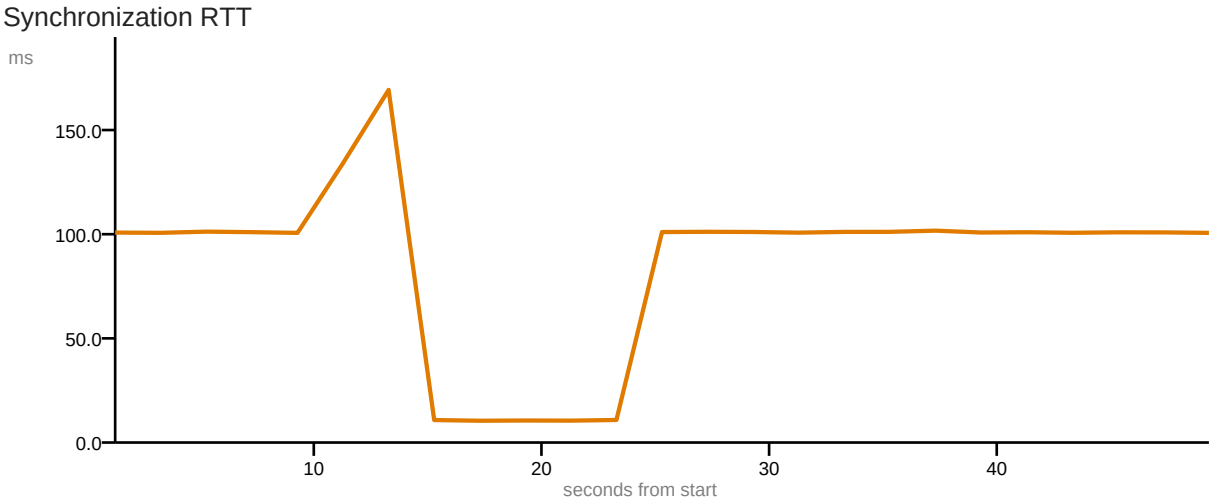

Generated 2026-11-05 06:19:02 by the Smart SDN dashboard. RTT values come from the UDP synchronization clients (h1–h3); throughput is measured by the Ryu controller on the slow link (s1 port 5).