Smart SDN – Experiment Report

Low Run (run #8, single mode)
Started 2026-11-05 06:13:44 · duration 50.4 s · status completed

Summary

Metric	Value
Automatic route changes	0
Average / peak slow-link throughput	0.32 / 1.56 Mbps
Sync RTT while on SLOW path	100.7 ms
Sync RTT while on FAST path (after reroute)	n/a
RTT improvement after reroute	n/a
Synchronization packet loss (timeouts)	0.0 %


Per-phase results


Phase	Start (s)	Length (s)	Avg slow Mbps	Peak Mbps	Avg RTT ms	Loss %	SLOW/FAST samples
Baseline	1.0	10.0	0.00	0.00	100.6	0.0	5/0
Low	11.0	10.0	1.32	1.56	100.6	0.0	5/0
Recovery	21.0	30.0	0.08	1.21	100.8	0.0	15/0

Controller routing events

No route changes were recorded during this run.

Slow-link throughput (red dashed = reroute threshold)

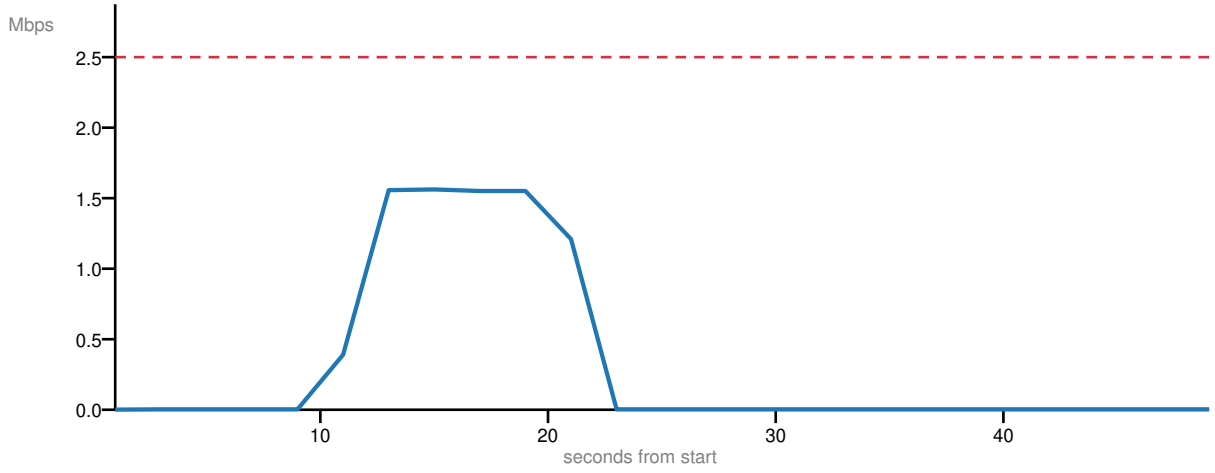

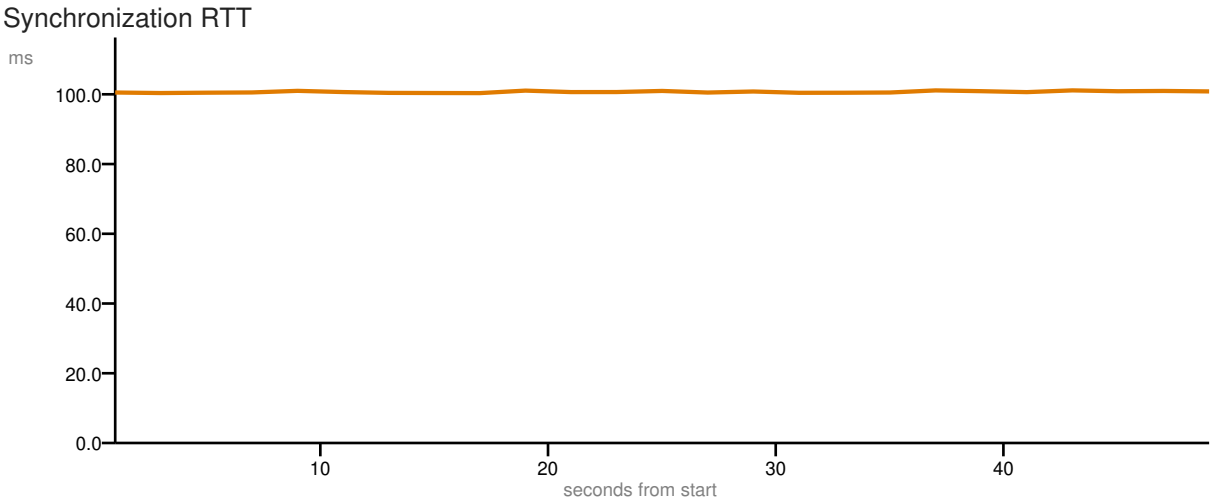

Generated 2026-11-05 06:14:43 by the Smart SDN dashboard. RTT values come from the UDP synchronization clients (h1–h3); throughput is measured by the Ryu controller on the slow link (s1 port 5).