Smart SDN – Experiment Report

Moderate Run (run #9, single mode)
Started 2026-11-05 06:16:15 · duration 50.5 s · status completed

Summary

Metric	Value
Automatic route changes	2
Average / peak slow-link throughput	0.62 / 3.12 Mbps
Sync RTT while on SLOW path	96.9 ms
Sync RTT while on FAST path (after reroute)	24.8 ms
RTT improvement after reroute	74.4 %
Synchronization packet loss (timeouts)	0.0 %

Per-phase results

Phase	Start (s)	Length (s)	Avg slow Mbps	Peak Mbps	Avg RTT ms	Loss %	SLOW/FAST samples
Baseline	1.8	10.0	0.00	0.00	100.7	0.0	5/0
Moderate	11.8	10.0	2.87	3.12	43.7	0.0	1/4
Recovery	21.8	30.0	0.09	1.24	88.7	0.0	14/1

Controller routing events

Time	Phase	Event
2026-11-05 06:16:29	Moderate	SLOW -> FAST (slow link 3.11 Mbps)
2026-11-05 06:16:39	Recovery	FAST -> SLOW (slow link 0.00 Mbps)

Slow-link throughput (red dashed = reroute threshold)

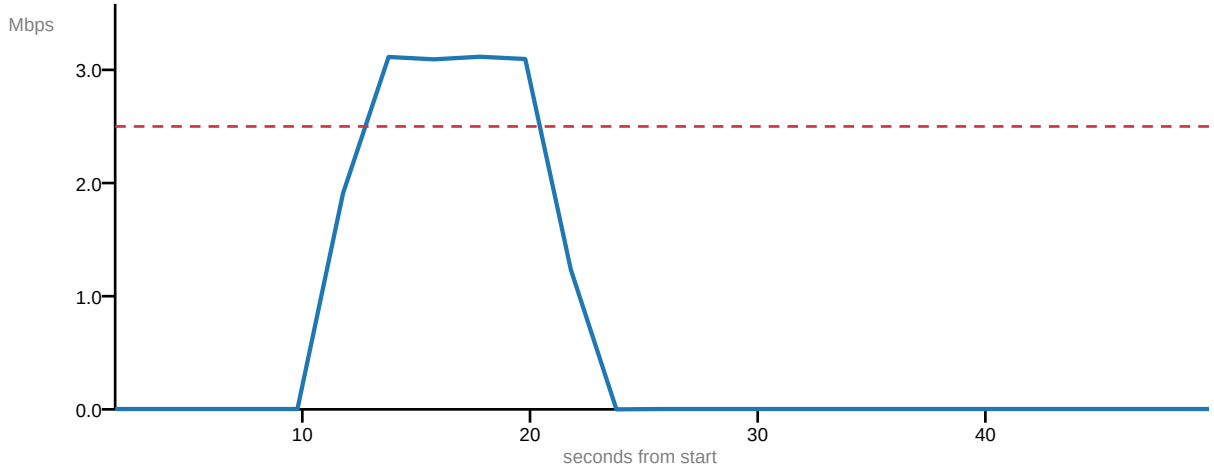

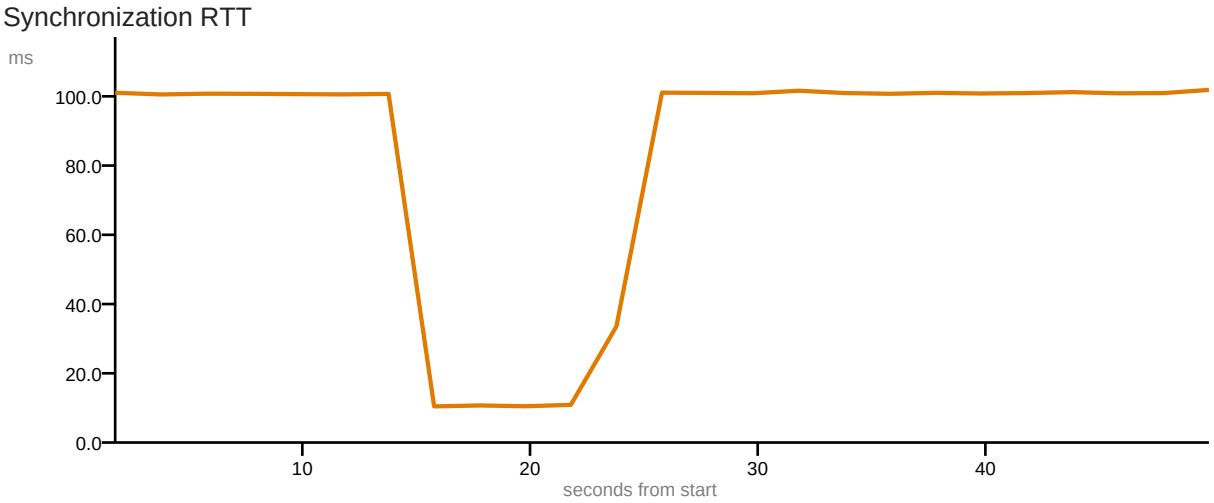

Generated 2026-11-05 06:17:17 by the Smart SDN dashboard. RTT values come from the UDP synchronization clients (h1–h3); throughput is measured by the Ryu controller on the slow link (s1 port 5).