Product NO. **MEK-CBL-0001**

REV	DESCRIPTION	DWN	DATE	APPD
R1.0	First issue	Maxime G.	2026-07-07	
R1.1	150mm breakout; View A pinout fix; rubber jacket; 3M5 only	Maxime G.	2026-10-05	

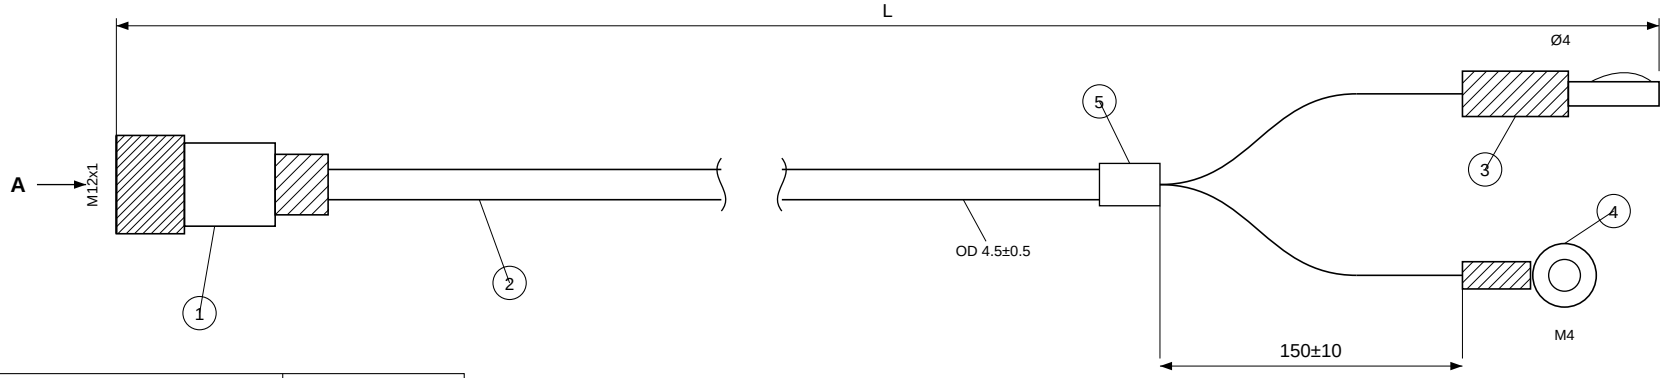

P/N	L
MEK-CBL-0001-3M5	3500±70



Ø15

VIEW A

Wiring Table

GX12 3P/F	Wire color	Termination	Cable
1	Black	M4 Ring terminal	AWG22
2	Brown	4mm Banana plug	
3	—	Not connected	

Technology parameter

NO. of contacts (used)	2 of 3
Rated current (A)	3
Operation limit voltage (AC V.rms)	50
Withstanding voltage (AC V.rms) 1 minute	500
Insulation resistance (MΩ)	≥ 100
Contact resistance (mΩ)	≤ 10

NOTES / REQUIREMENTS

1. 100% electrical test: continuity + insulation before shipment.
2. Cable rated for continuous flexing/coiling
3. Pull test on crimped ring terminal: min. 30 N.
4. Materials RoHS 2011/65/EU + REACH compliant.
5. Jacket: rubber preferred. PVC accepted only if rubber not available; supplier to state material in quotation.

NO	PART NAME	DESCRIPTION	QTY
5	Heat shrink	Black polyolefin at jacket breakout, min. 20mm overlap	1
4	Ring terminal	M4, insulated black, crimped, suitable for 22AWG	1
3	Banana plug	4mm male, black, nickel plated brass, PVC insul. (ref. RS PRO 212-1231 or equiv.)	1
2	Cable	22AWG*2C stranded, Jacket: Rubber Black (alt. PVC Black), OD: 4.5±0.5mm	1
1	Connector	GX12 3-Pin Female, zinc alloy shell, nickel plating	1

-TOLERANCES-

UNLESS OTHERWISE SPECIFIED

TOLERANCES FOR MILLIMETERS ARE:

0.5 - 8mm ± 0.20mm

8 - 30mm ± 0.25mm

30 - 120mm ± 0.30mm

MEKANIKA

Brussels, Belgium

PART DESCRIPTION:

GX12 3P FEMALE TO 4mm BANANA PLUG + M4 RING TERMINAL, AWG22 RUBBER CABLE

Appd:

Check:

P/N: **MEK-CBL-0001**

Draw: Maxime G.

Date	Scale	Unit	Page
2026-07-07	FREE	MM	1/1