

Intelligent automatic heavy-duty door opener

Maximum Load Capacity: 800Kg Maximum Door Width: 6M




Shenzhen Black Bear Intelligent Technology Co., Ltd

Address: Guanhu Street, Longhua District, Shenzhen,
Guangdong Province Building 7, Factory 101,
Dahe Industrial Zone



联系方式
Contact Information

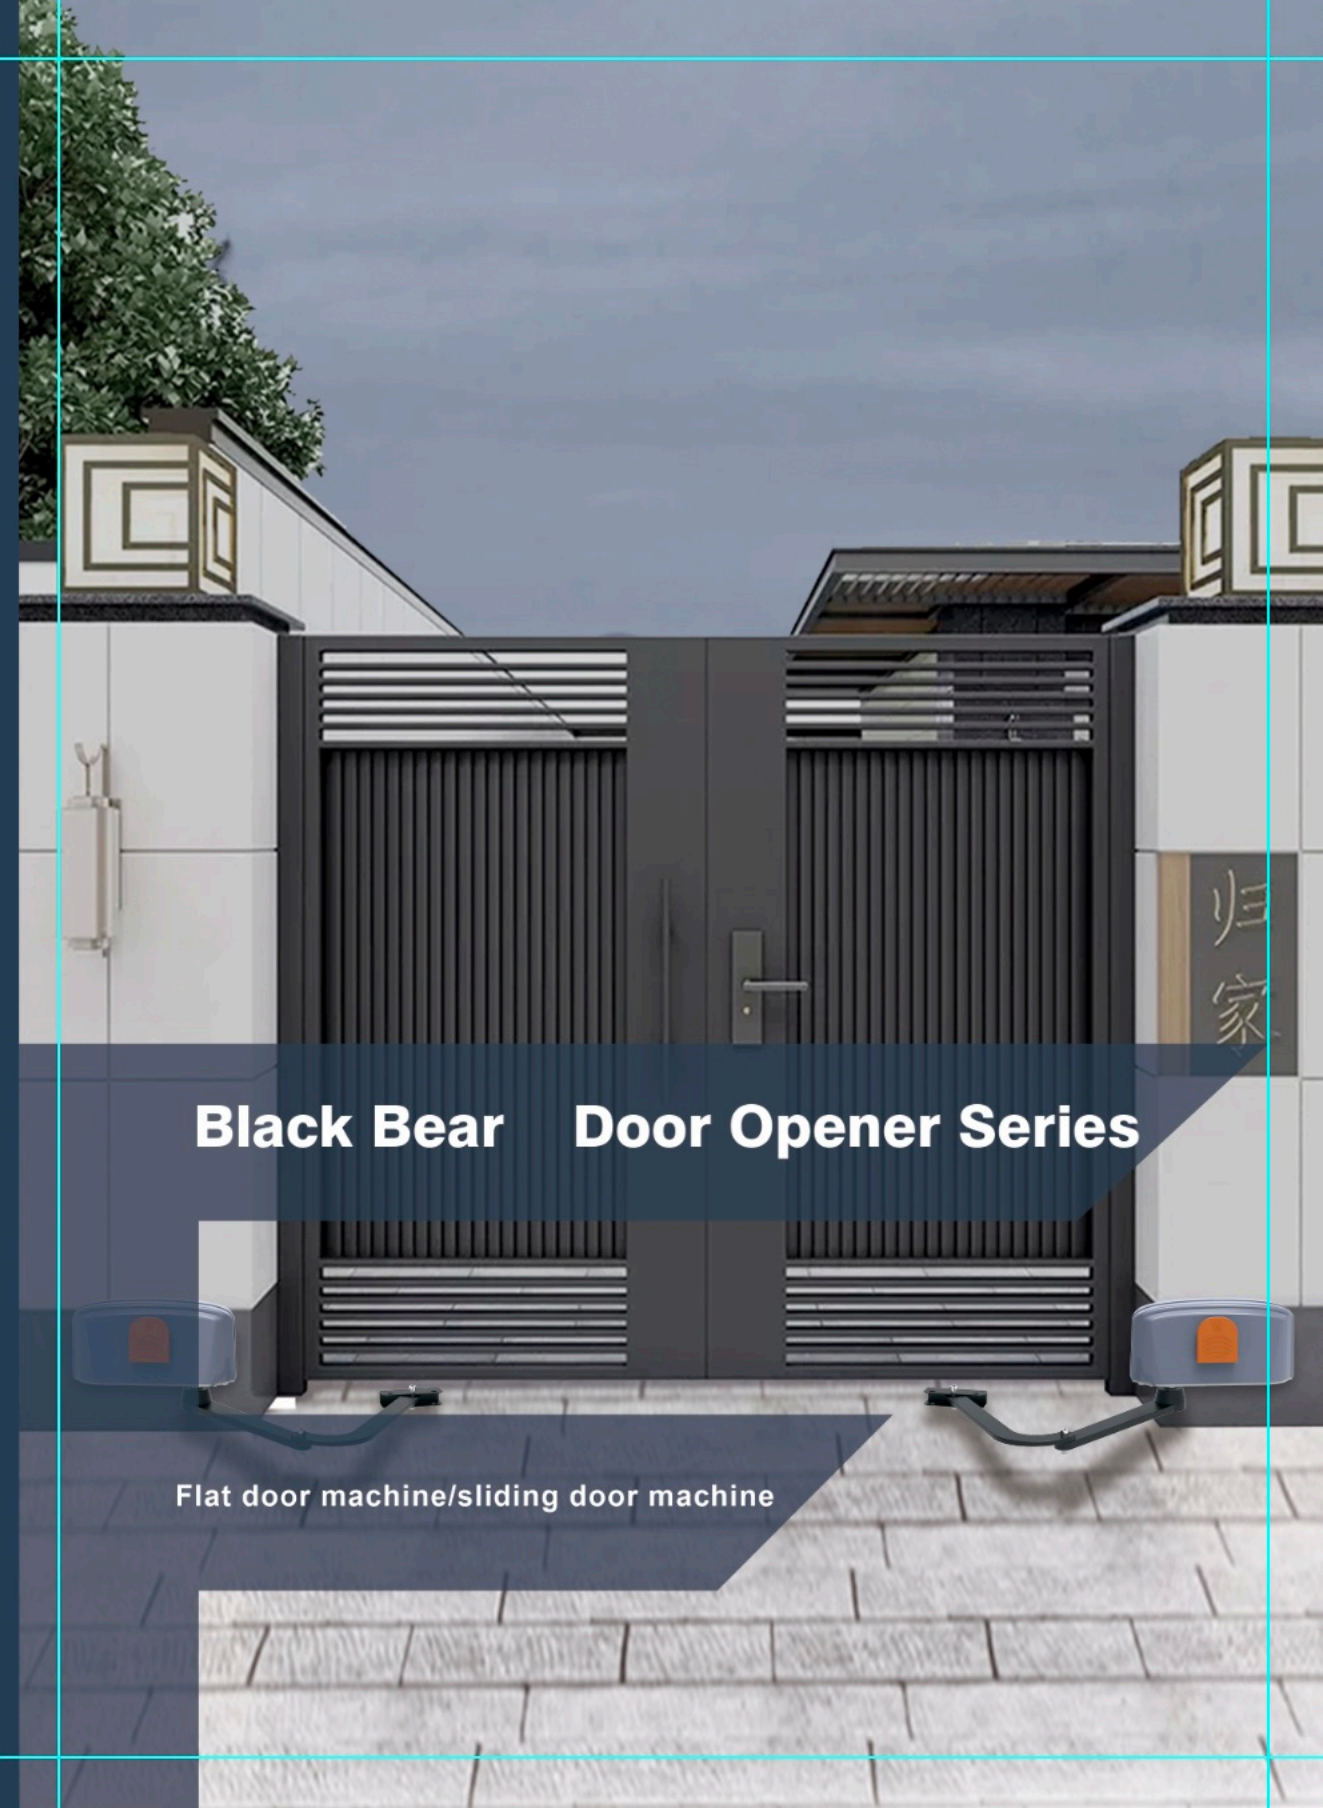

Black Bear Door Opener Series



Flat door machine/sliding door machine

Horizontal door opener




- Supports WIFI or 4G
- Resistance rebound adjustment
- Door opening delay adjustment
- Learning the angle of opening the door
- Daily timed switch function
- Remote locking function
- Double door linkage function
- Mother Child Gate Function
- Support Bluetooth control and adjustment
- Adjustable switch speed
- Support electronic control lock
- Support secondary development


Product Parameters

power supply voltage	220VAC+15%50HZ
Motor operating voltage	24VDC
angular velocity	40.75°/s
Motor thermal protection	F-class 155 ° C
frequency of use	Continuous use below 70 ° C
Usage environment	outdoors
Body dimensions	330*85*84.4mm
Package dimensions	530*180*110mm
Equipment packaging weight	5.3kg
Motor power	30W
Rated torque	34Nm
Maximum opening angle	±90
Maximum door width	2m (single fan)/100kg
Working environment temperature	-25-70°C
Operating noise	<60dB
temperature rise	<15°C
Fixed base size	330*85mm
Drive Type	Crank slider drive, crank connecting rod drive

Product dimensions

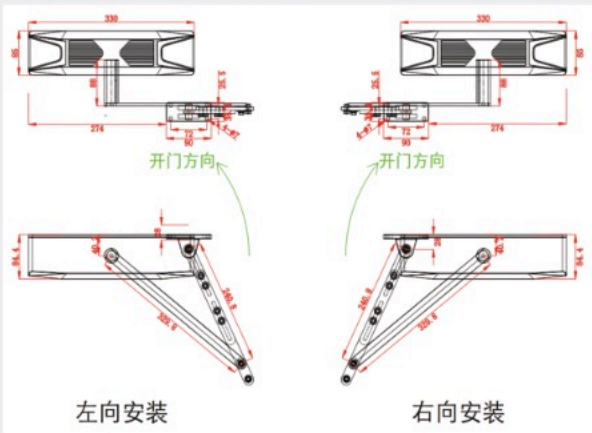

installation dimensions

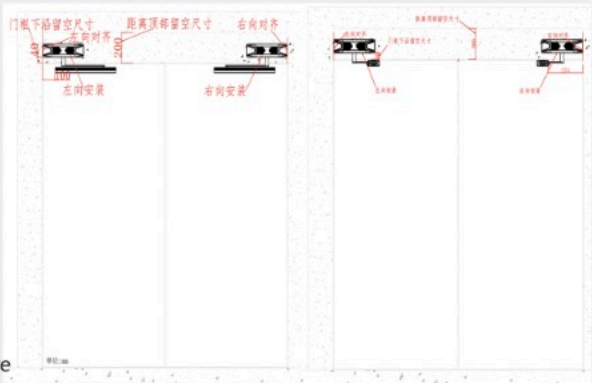

Practical Cases



Side mounted door opener




- Supports WIFI or 4G
- Resistance rebound adjustment
- Door opening delay adjustment
- Learning the angle of opening the door
- Adjustable switch speed
- Support electronic control lock
- Delayed door opening function
- Remote locking function
- Double door linkage function
- Mother Child Gate Function
- Support Bluetooth adjustment
- Support secondary development


Product Parameters

power supply voltage	220VAC+15%50HZ
Motor operating voltage	24VDC
angular velocity	69.7°/S
Motor thermal protection	F-class 155 ° C
frequency of use	Continuous use below 70 ° C
Usage environment	Indoor or outdoor
Body dimensions	355.7-89.6-105.7mm
Package dimensions	400*280*110mm
Equipment packaging weight	6.4kg
Motor power	40W
Rated torque	24.6Nm
Maximum opening angle	±90
Maximum door width	2m (single fan)
Working environment temperature	150kg
Operating noise	<60dB
temperature rise	-25-70°C
Fixed base size	355.5*89mm
Drive Type	Crank connecting rod drive

Product dimensions

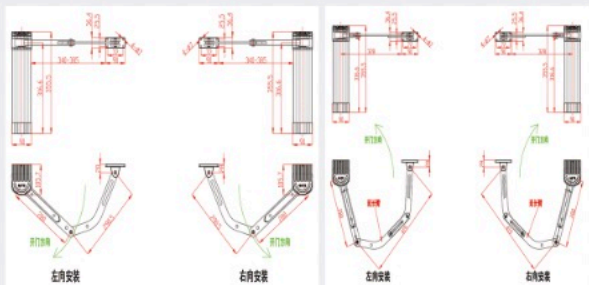

installation dimensions

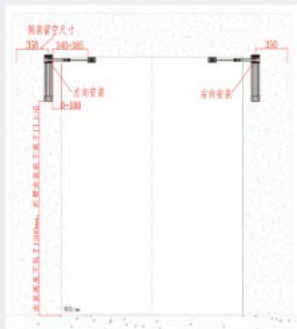

Floor Spring




- Strictly prevent oil leakage
- mute switch
- 90 ° positioning
- high and low temperature resistance
- Hydraulic buffer
- Open the door smoothly





Product Parameters

technical indicators	parameter description
Suitable for door width	Within 1200mm
Suitable for door weight	Within 150KG
Opening angle	Bidirectional positive 90 °
Opening direction	bidirectional
Open door holding time	Adjustable within 1-20 seconds
Opening speed	adjustable
Door opening buffer distance	adjustable
closing speed	adjustable
Closing buffer distance	adjustable
Remote control function	There are normally open, slightly open, normally closed, and automatic options available
Automatic overload protection	Rebound in case of resistance (overload)
Door closing and stopping position	External travel limit or automatic positioning
Distinguish between left and right doors	Adjustable
power supply	110-250V
input power	Static 4W, maximum 100W
Overall dimensions of the host	171x211x37mm
Dual door communication function	have
Backup power function	optional
Whole machine tension	Maximum 120N
Shielding signal setting	have
Active anti pinch	Safety light or safety light curtain
Passive anti pinch	Resistance rebound function



Product dimensions

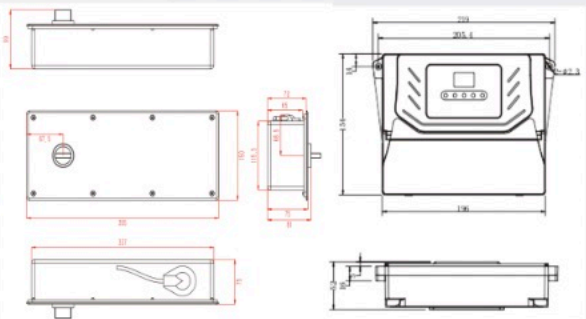

installation dimensions

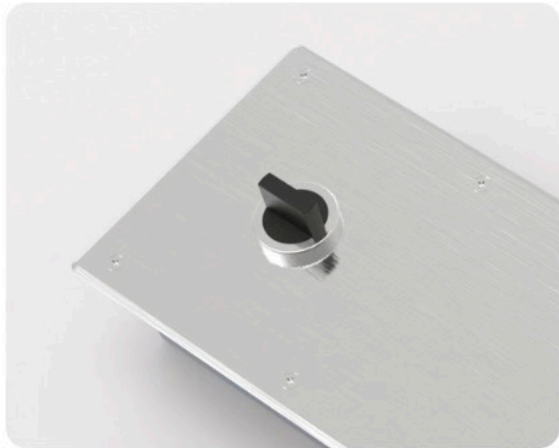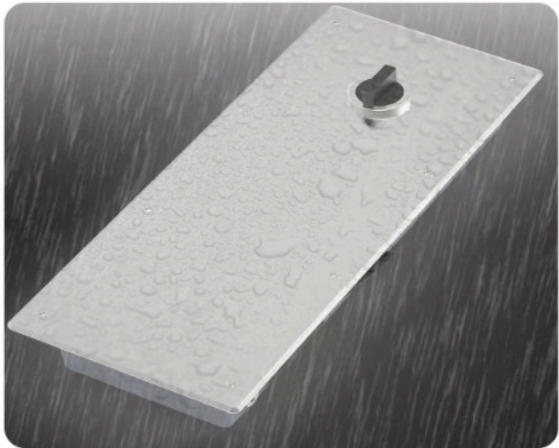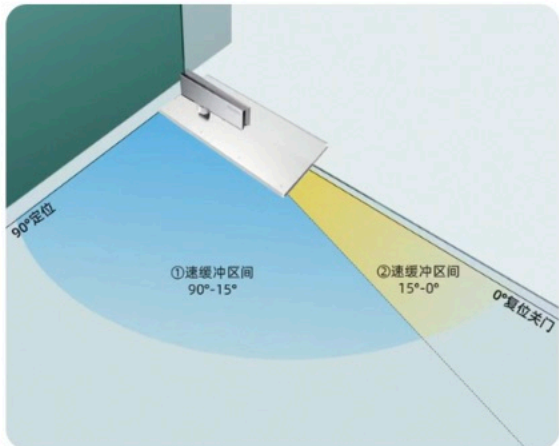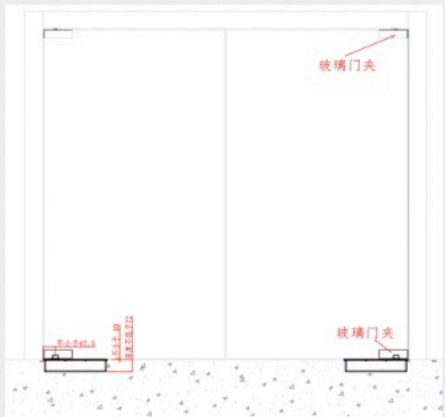

二段调整阀只宜微调,不可拧出。

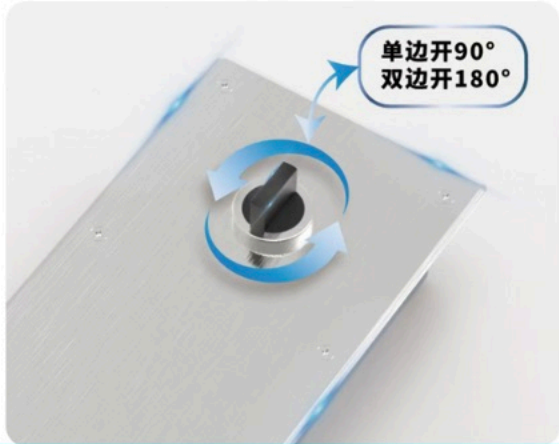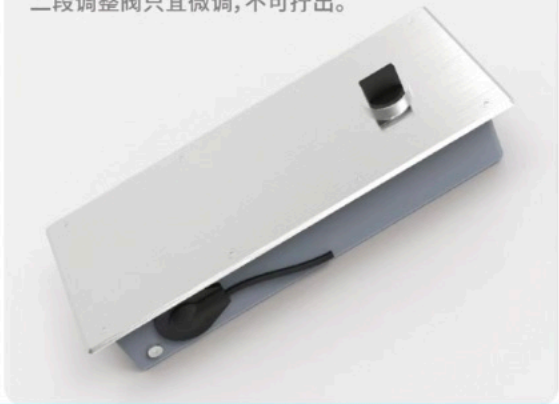

DC/Gear rack sliding door motor

1800KG

1200KG



Product Parameters

Model	HX800DC	HX1200DC
Power Supply	DC24V	DC24V
Max. Door Weight	1200KG	1800KG
Motor Power	200W	400W
Opening Speed	16-18m/min	24m/min
Max. Output Torque	22N	
Limit Method (Optional)	Spring pawl or magnet	
Battery Spec.	24V/2Ah Lithium Battery	
Remote Control Range	30m≤	
Duty Cycle	S2, 20min	
Noise	≤56dB	
Ambient Temperature	-20°C~50°C	
Max. Number of Remotes	25	




Product dimensions

- All-in-one DC motor, modern stylish design;
- Auto close after adjustable delay;
- Soft start & soft stop, quiet & smooth running;
- Obstacle detection: stop when opening blocked, reverse when closing blocked;
- Expandable for backup battery, alarm light, infrared sensor, mobile APP control, etc.



Practical Cases

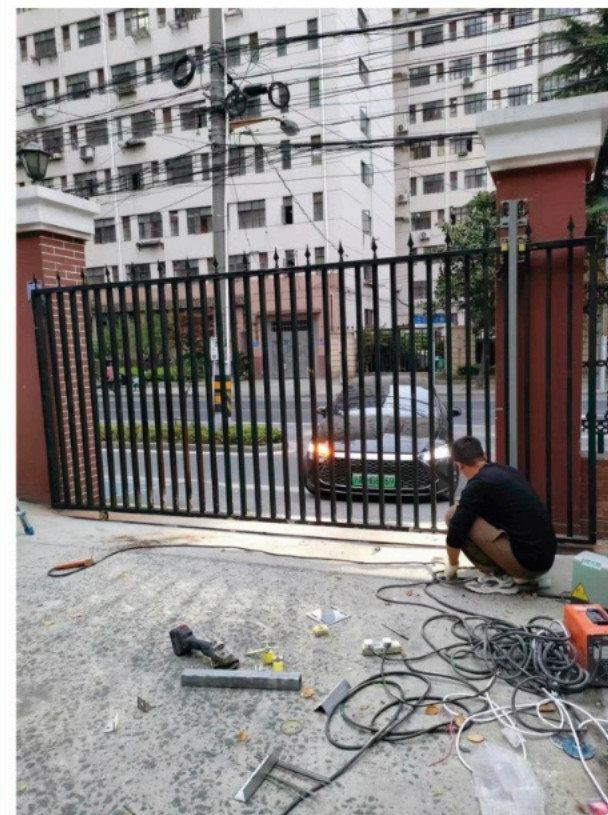

Heavy duty door opener




Remote door opening Remote debugging

Product Parameters

Power supply voltage	220VAC±15% 50Hz
Motor operating voltage	24VDC
Motor power	1.2KW
Rated torque	650Nm
Angular velocity	13°/s
Maximum opening angle	±90°
Maximum door width	6m
Motor thermal protection	F-grade 155℃
Frequency of use	Continuous use below 70 °C
Working environment temperature	-25-70℃
Usage environment	Used in indoor or outdoor environments with obstruction
Operating noise	≤60dB
Temperature rise	≤15℃
Equipment packaging weight	8.1kg
Body size (length * width * thickness)	361.8*203.4*174.7mm
Package dimensions	To be determined


Product dimensions (Unit: mm)

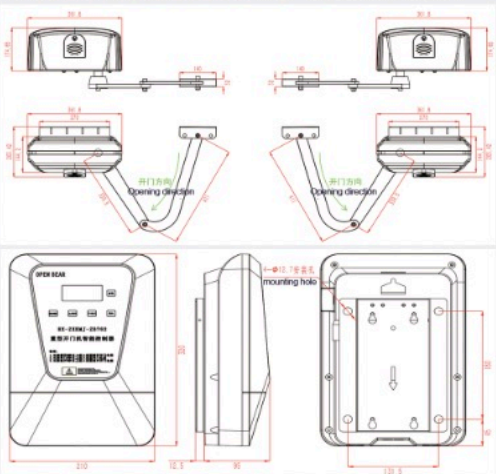


Installation dimensions



Practical Cases

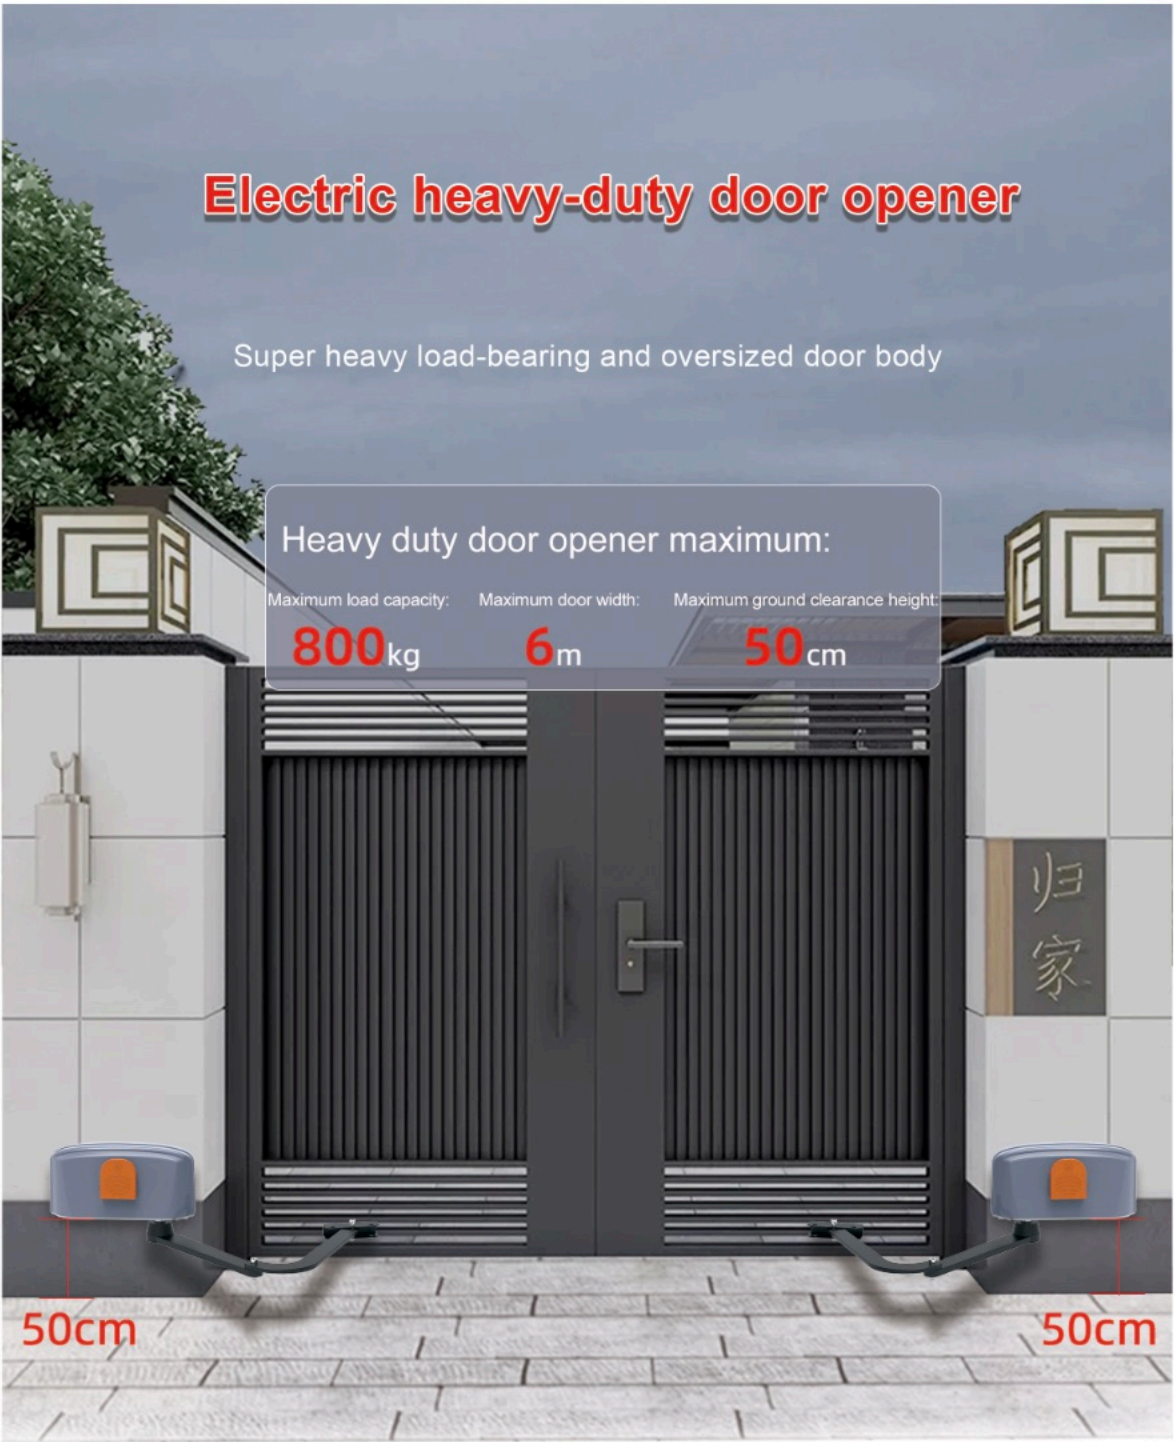

Intelligent Eight Character Door Opener

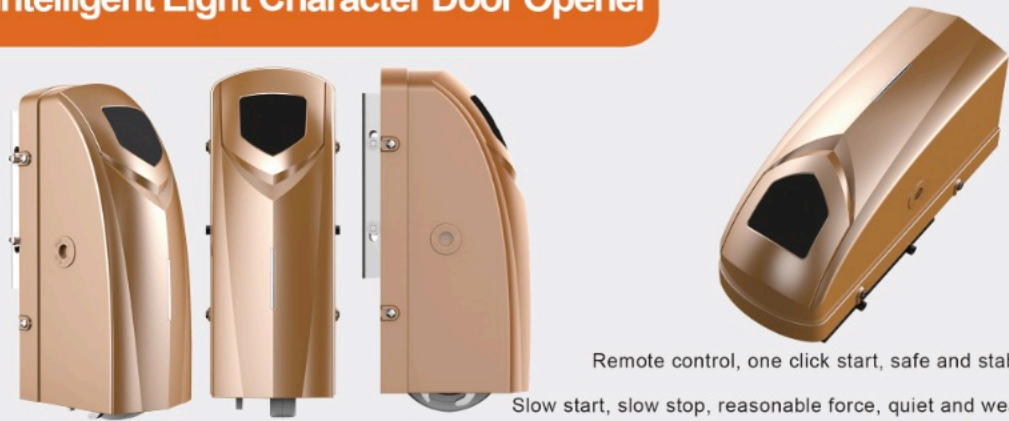

Remote control, one click start, safe and stable

Slow start, slow stop, reasonable force, quiet and wear-resistant

Six Major Features

- Reasonable force distribution: The door machine is installed on the side away from the door hinge, and the driving force directly acts on the opening and closing direction of the door. It uses 24V DC voltage, which is safe, energy-saving, and efficient.
- Unique sliding mechanism: It can automatically rise and fall elastically when the ground is uneven, adapting to slightly undulating road surfaces (adaptability is 0-140mm, 0-280mm) without the need to bury tracks.
- Large opening angle: The door can be opened to any angle without being limited by the door mechanism itself (>180°)
- Automatic locking device: The automatic locking mechanism of the door machine is the latest technology developed by the company. The newly designed three-dimensional clutch mechanism realizes the integration of drive, locking, function, safety, and reliability. After the door is locked in place, there is no need to add a door lock.
- Manual operation: In case of power outage, use a dedicated key to easily switch to manual operation. It can also be switched to a backup power source or solar power supply (optional accessories).
- Installation form: It is not affected by the pillar and original structure, and can be installed on any new or old gate without damaging the original gate body and pillar structure.

Ten intelligent functions integrated into one

1. Single/Double Open Selection: Through remote control operation, single fan independent or dual fan simultaneous opening and closing of the door can be achieved.
2. Button lock: By operating the remote control, all functions of the control panel can be locked to prevent unauthorized access.
3. Self stop in case of obstruction: When encountering pedestrians, vehicles, or obstacles during operation, it can automatically stop. Ensure safety and set the resistance level within the controller.
4. Infrared docking interface: Through an external infrared detector, if pedestrians or vehicles pass through during operation, it will automatically stop. (Optional accessories)
5. Backup power interface: Batteries or solar cells can be selected as backup batteries. (Optional accessories)
6. Automatic door closing: After opening the door, it can be automatically closed within a set time. (Select Function)
7. Time protection: The single operation time of the door machine is set within 60 seconds to ensure the safety of the motor.
8. Automatic locking when closing the door: The door is securely locked in place.
9. Repetitive operation restriction: To prevent damage to the door caused by misoperation when the door is fully opened and over flushed.
10. Automatic identification system interface: As a component of the security system, this interface can be connected to cameras and card readers for the automatic identification machine release of vehicles. (Select Function)

Practical Cases

