

Whammy 5 - NEO - Version 1.06
By melatroid

First Working Version
Not fully Testet!
Wait for a Final Version!

melatroid@gmail.com



Calibration

Layer 1/2


Time/Position

OLED Display


Effect On/OFF

Momantary
/ Change
Effects

Front

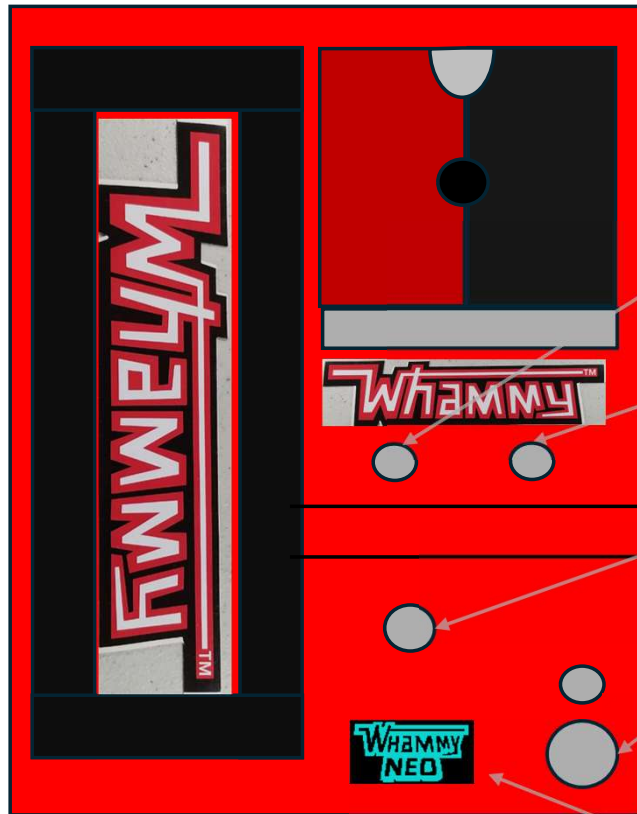

Back

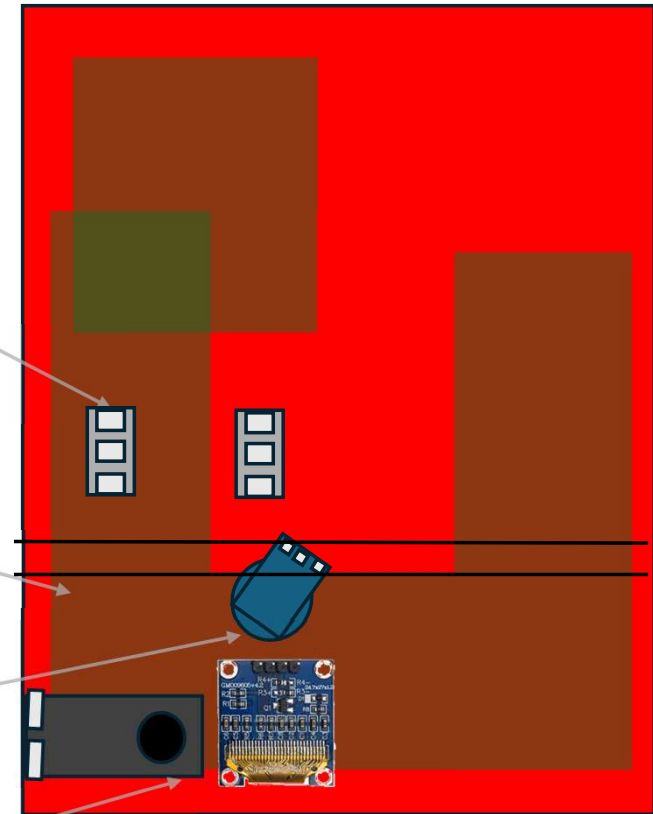

6mm
Calibration



6-7mm
Layer 1/2 Switch

Poti 10K0hm
7mm

Momentary Switch
12mm

OLED Display
25x16,5 mm




Holes & Display

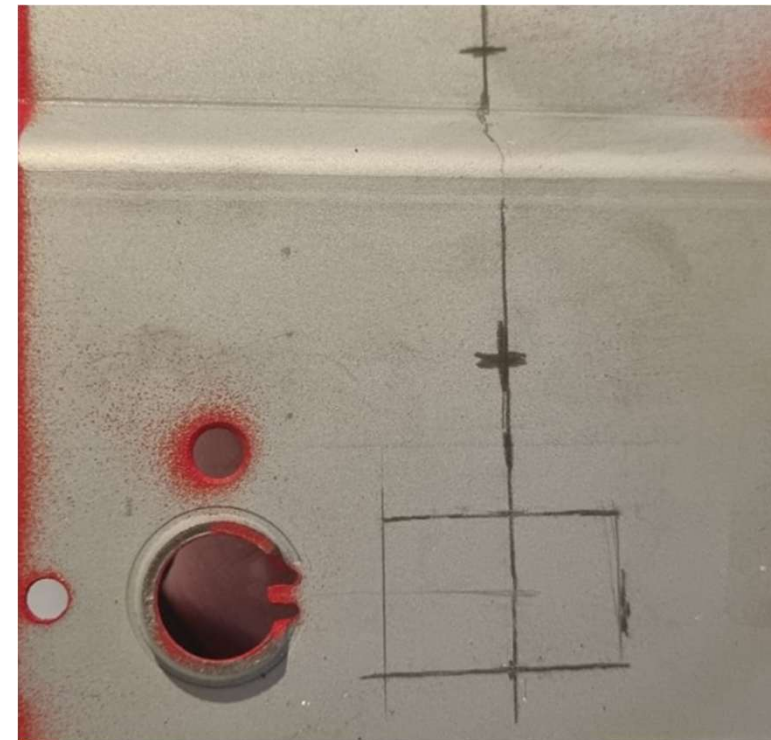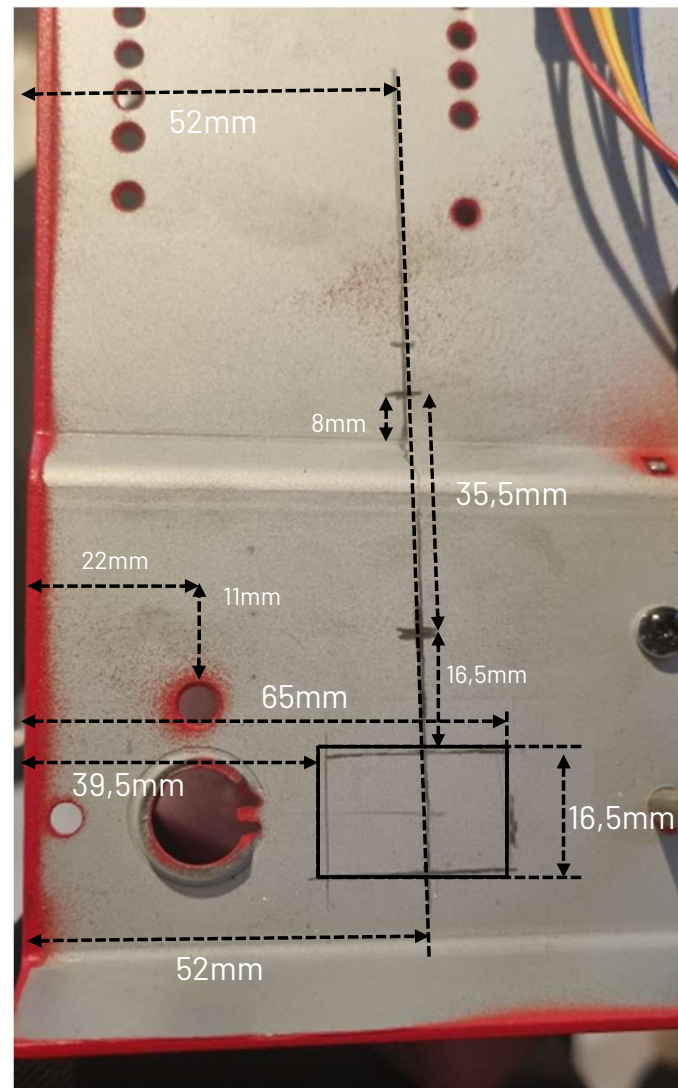

Drills

Be shure that layer switch is very short, there is only 9-10mm space to the circuity board


Print it with a 3D printer

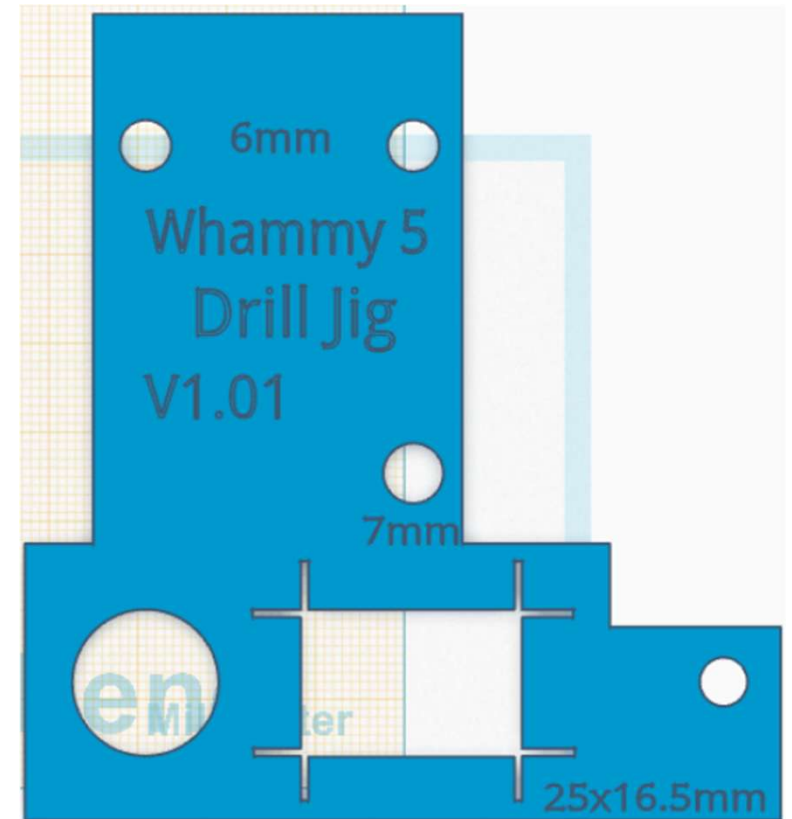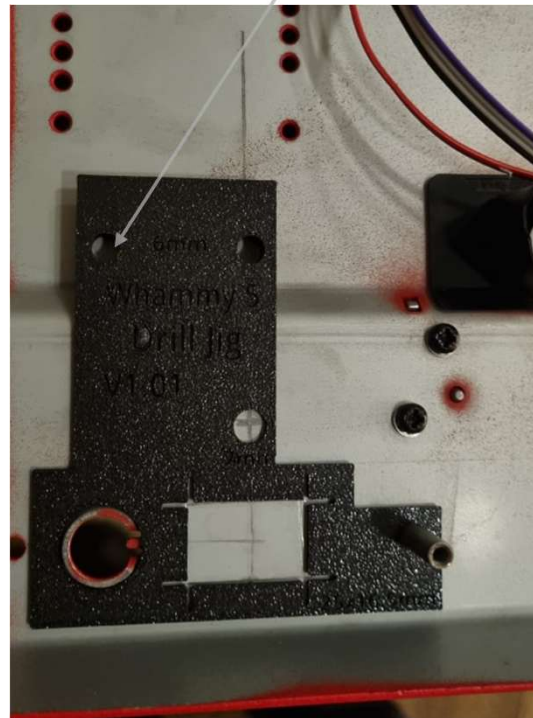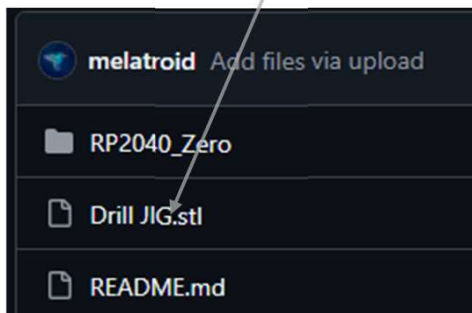

Parts

<https://tweakable-parts.com/en/footswitches/175-spst-momentary-switch.html>


Normally Open! → PBS 24B 4L
Long Version!

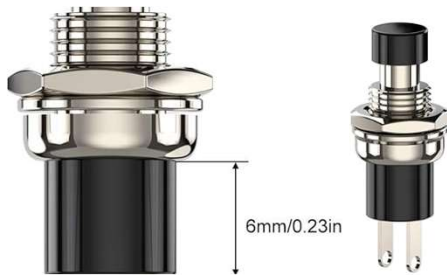

SPST, NO, 1x
Layer 1/2 **Momentary !!!**



Toogle Switch 1x
Calibration (3 Way)



SPST, NO,
Momentary !!!



**SSD1306 OR
SSD1315**
O-LED
I²C !!!



22-47
uF



100 nF
47 nF

ELKO/Ceramic
Condenser


B0505S-1W



DC/DC
LM2596



10KΩ




Raspberry Pi
2040 Zero




220Ω 2x


Power Supply

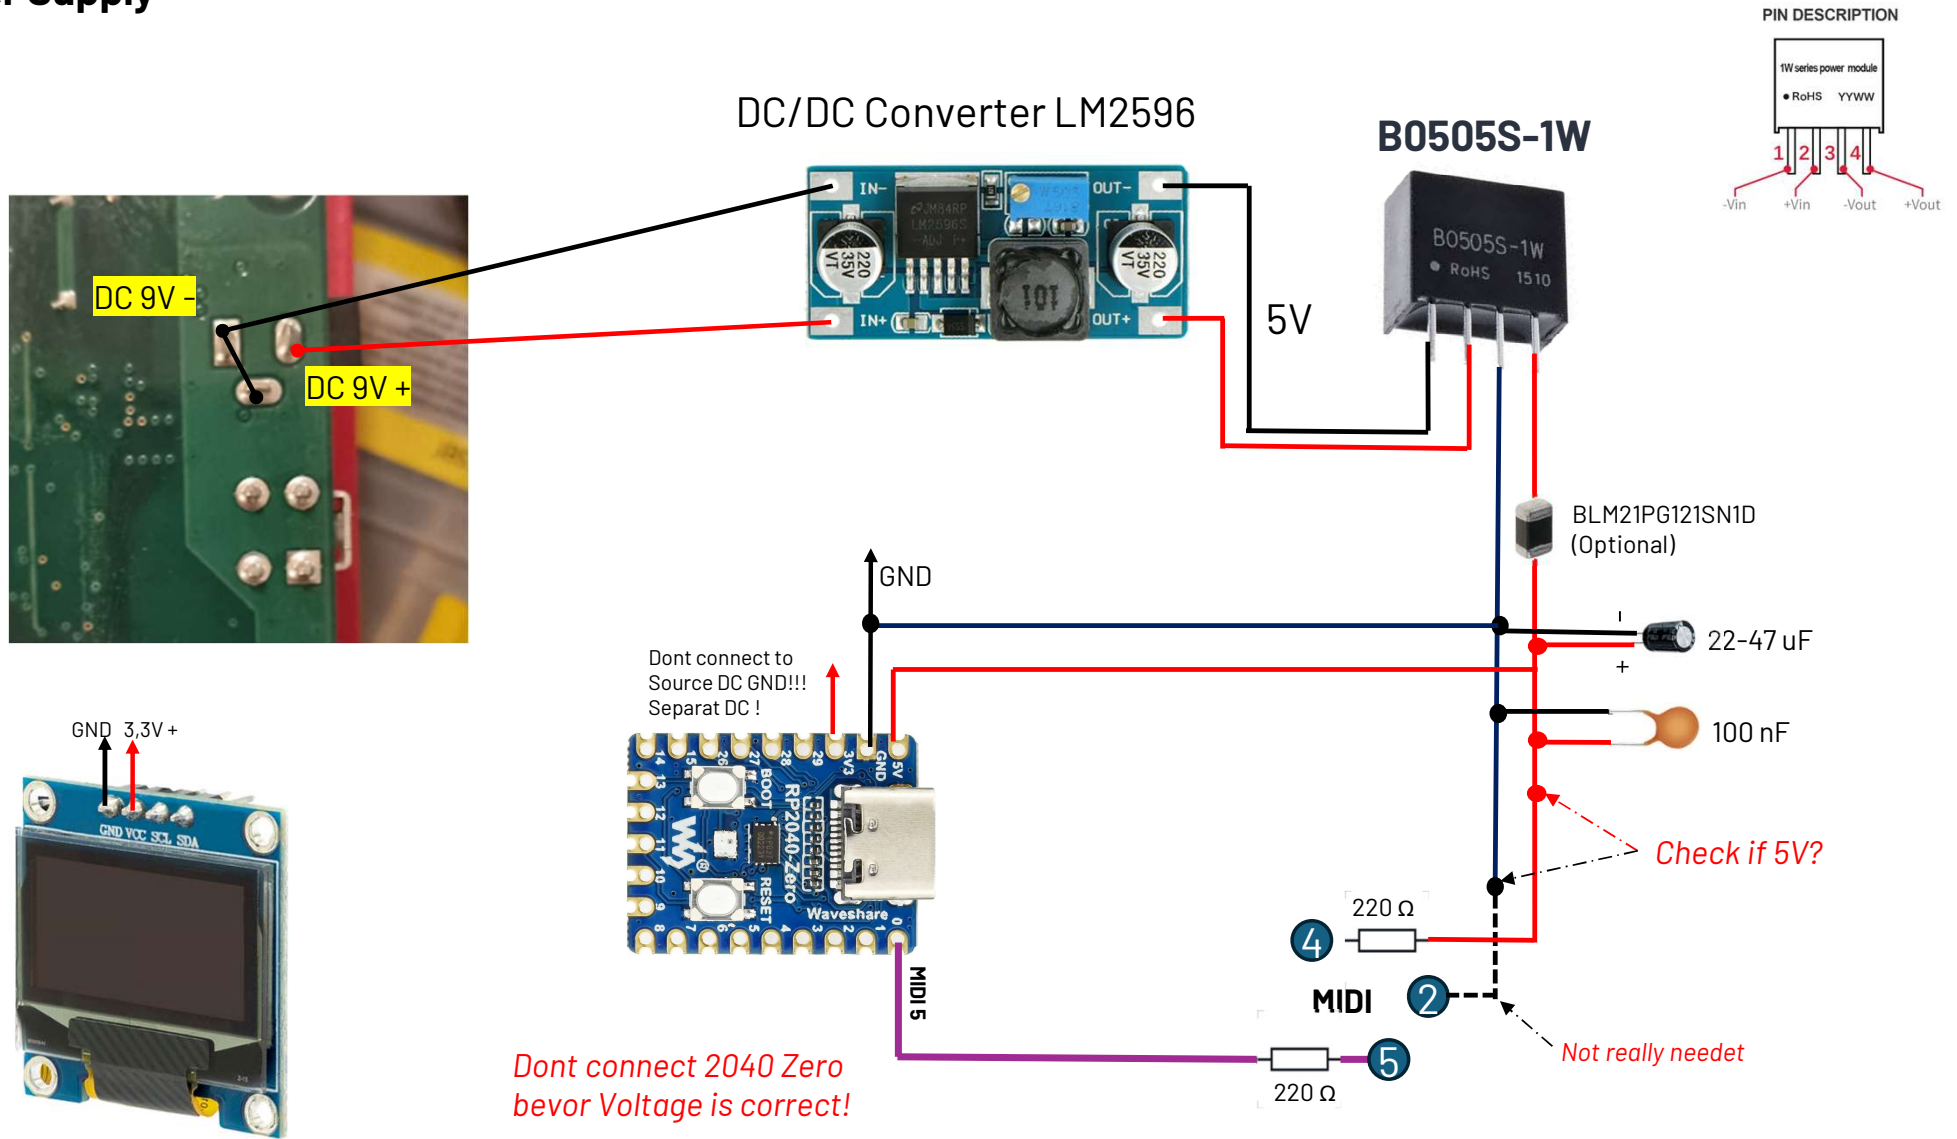

RP2040Z
Free Version

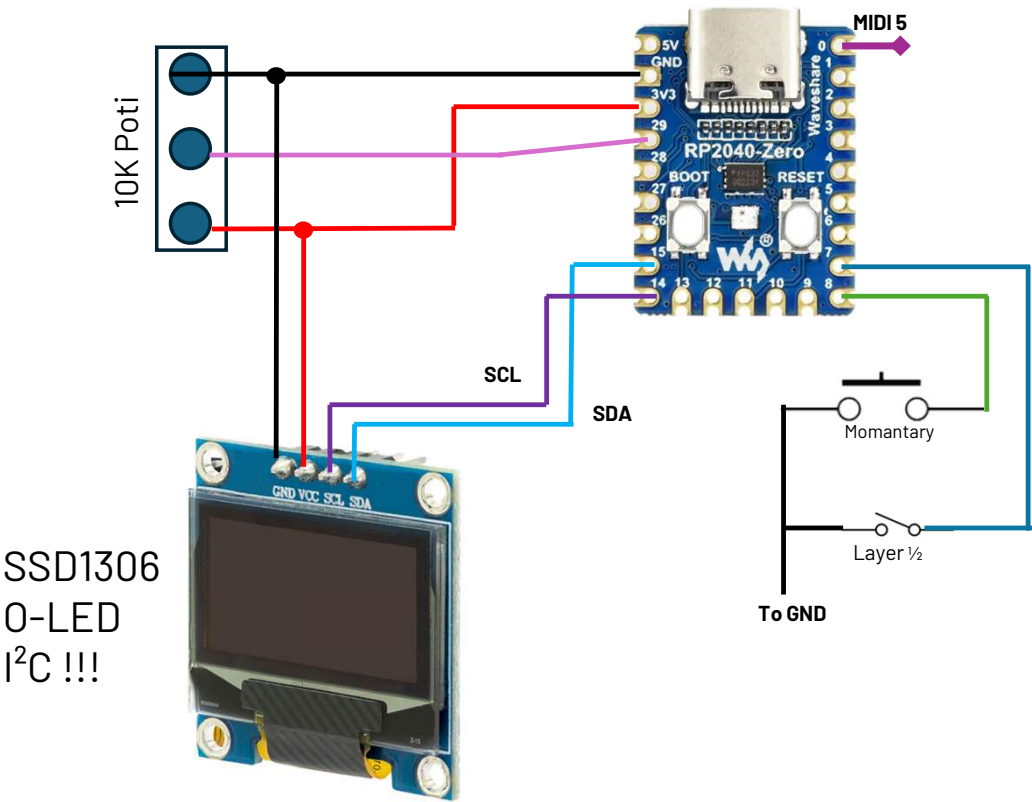

**Bluetooth & Memory –
Only in PRO Version**

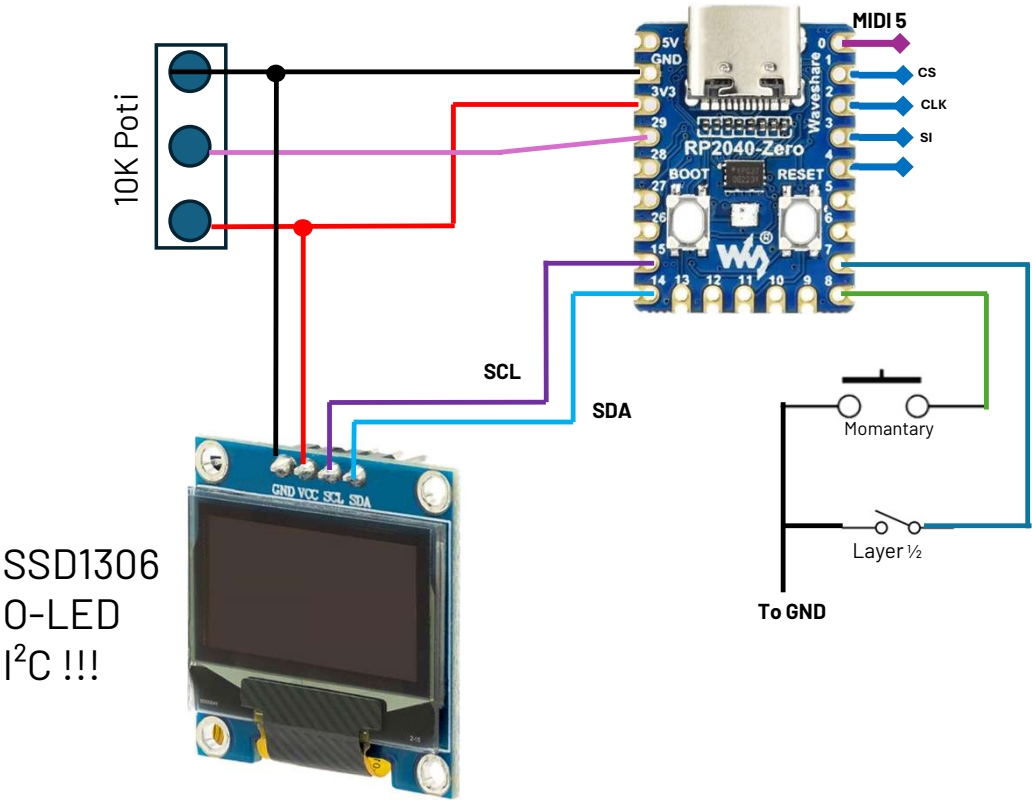


MICRO SD 2 < 32 GB
FAT32 Format




MICROSD SPI/SPIO
BREAKOUT BOARD



1528-4682-ND

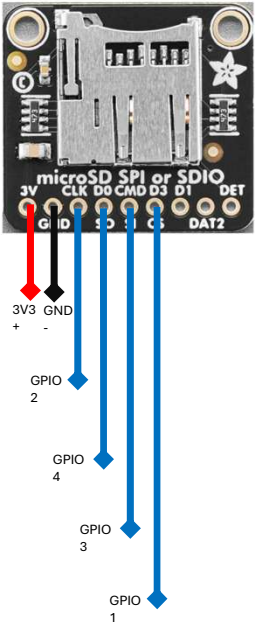

Inside


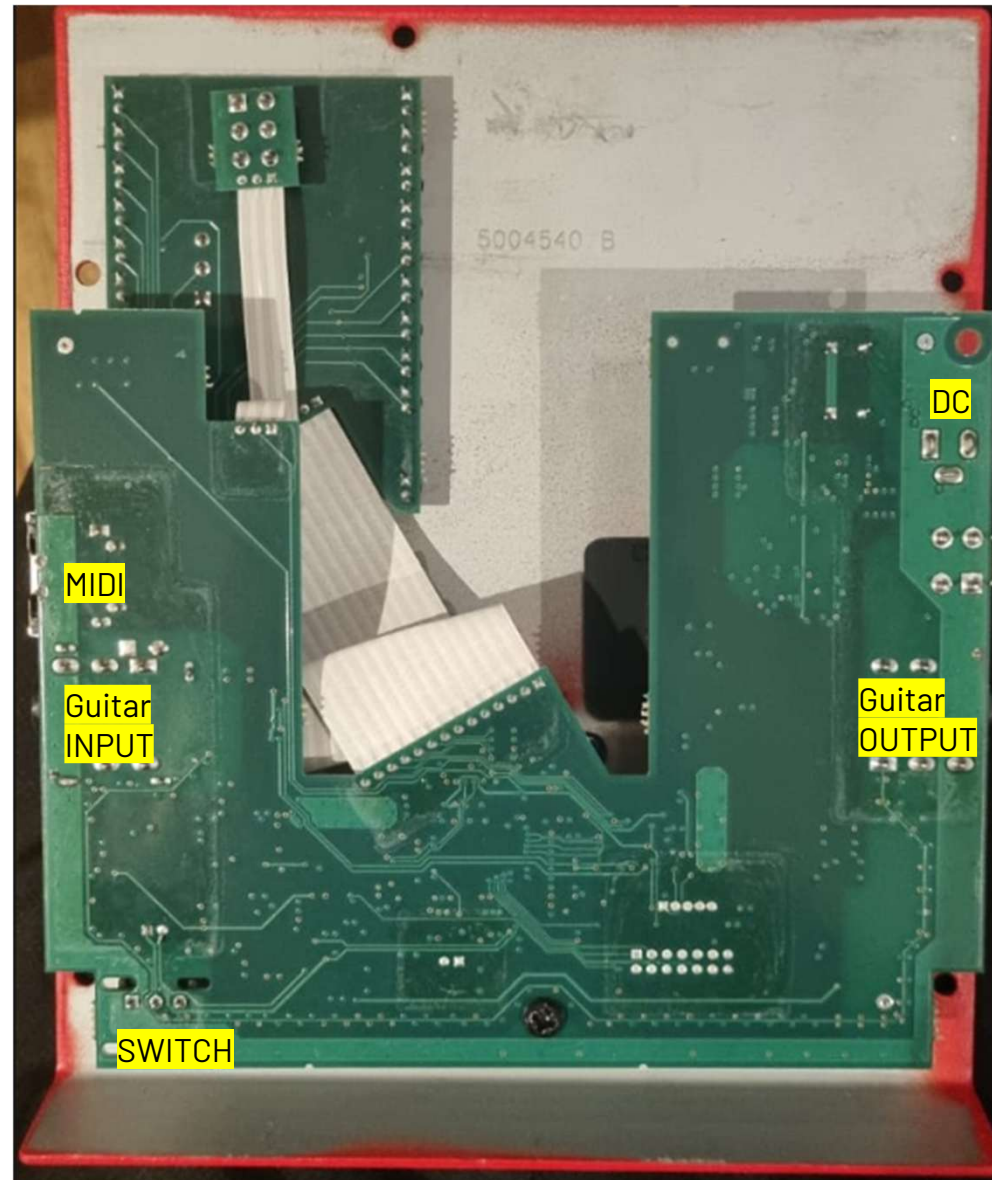


Midi

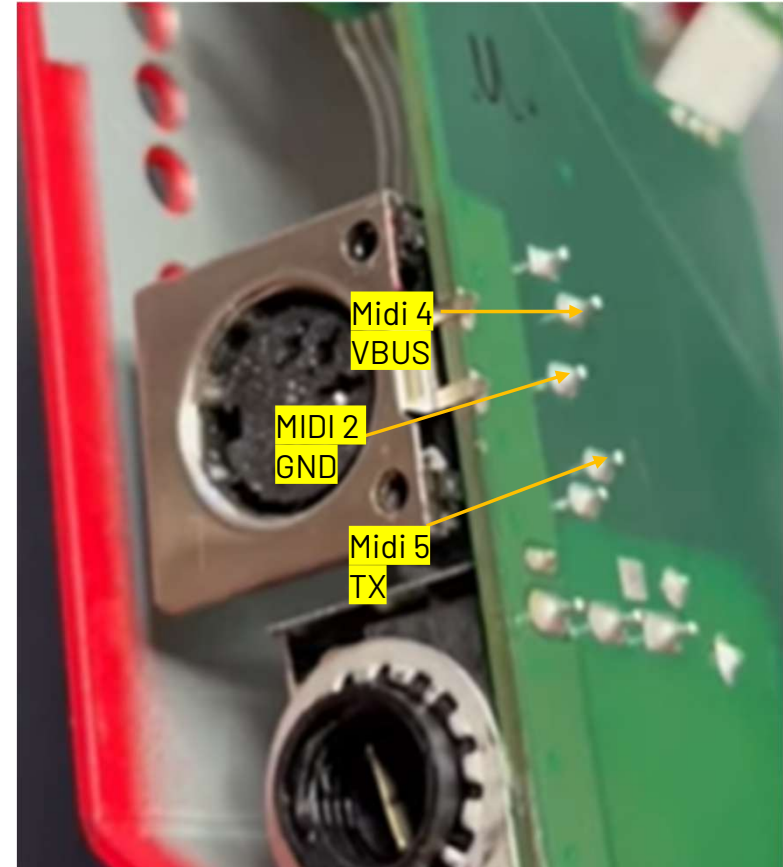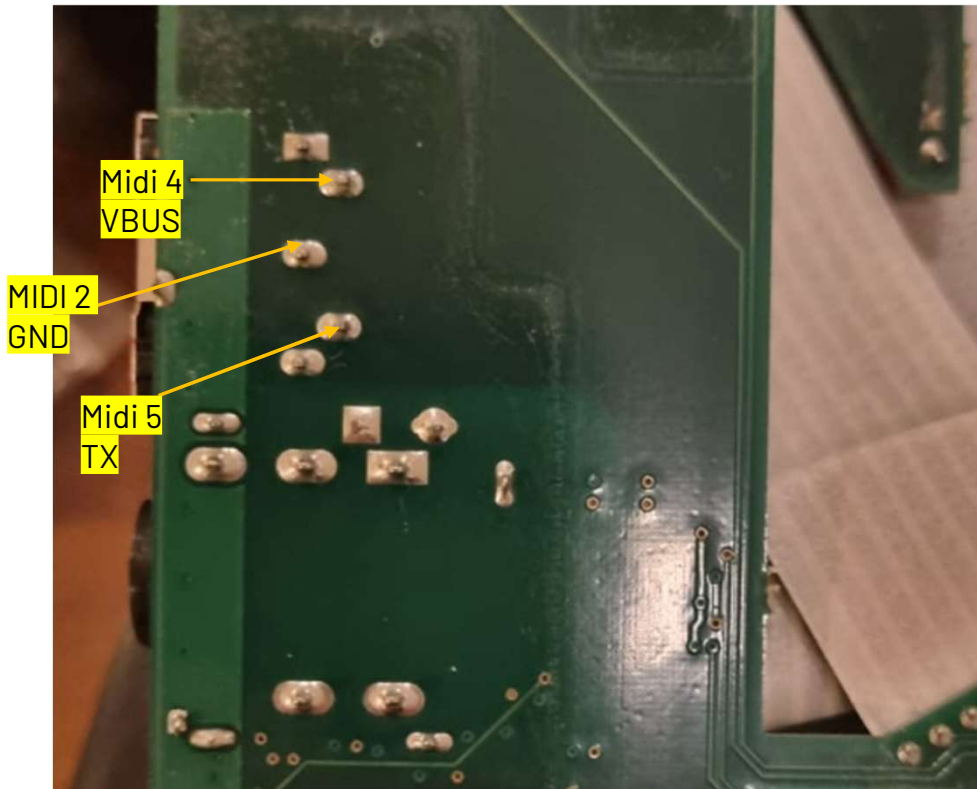


Circuit Board


Purchase the components and solder a board according to the circuit diagram.

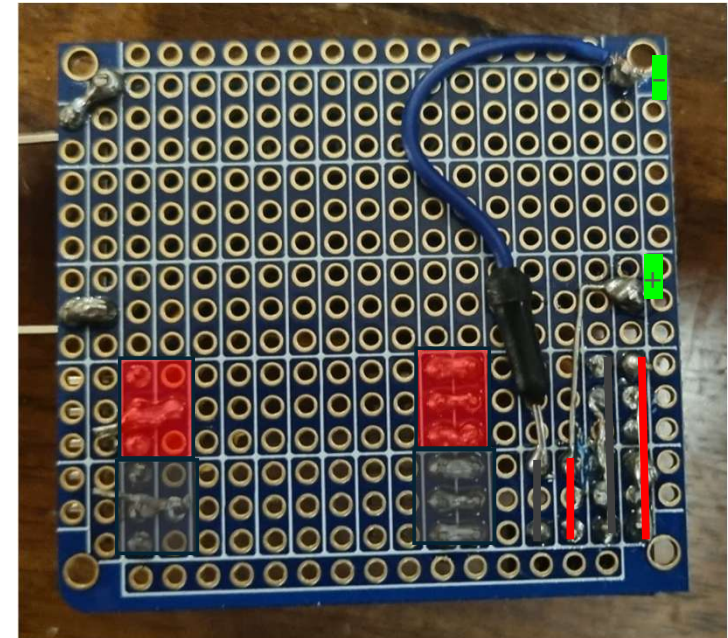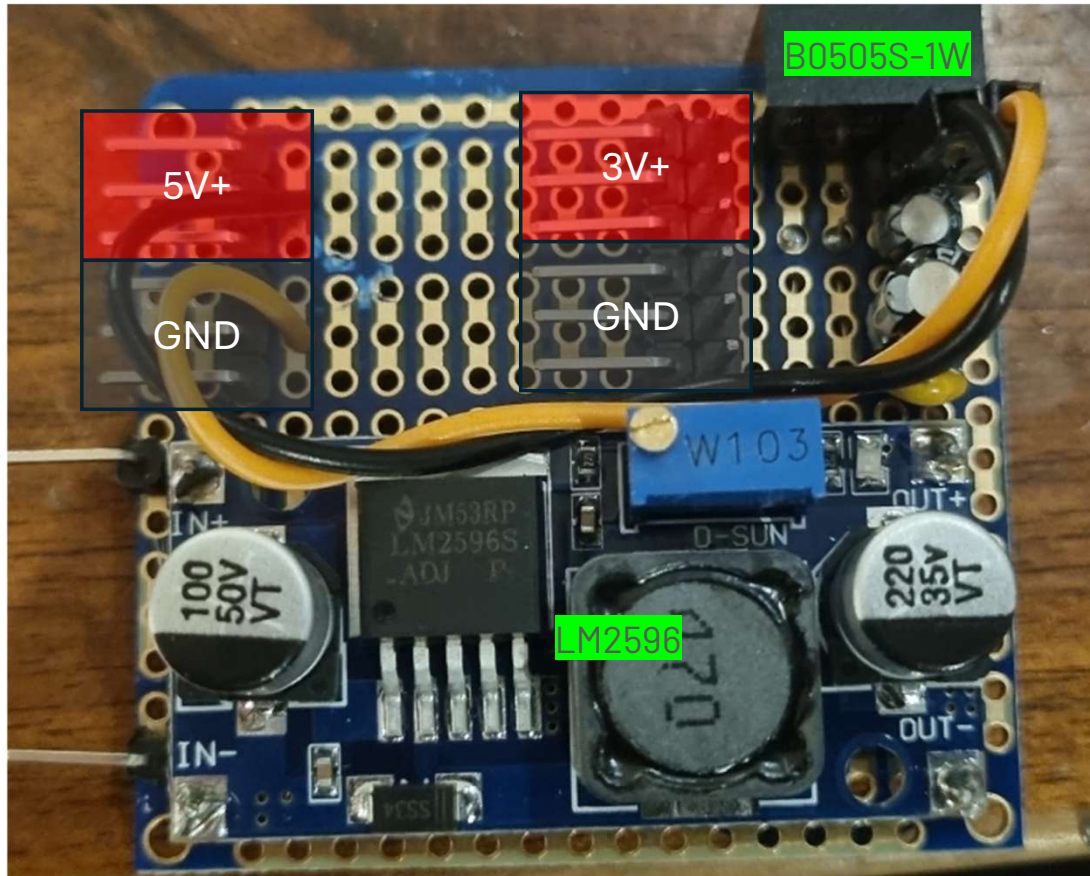




Test Circuit Board

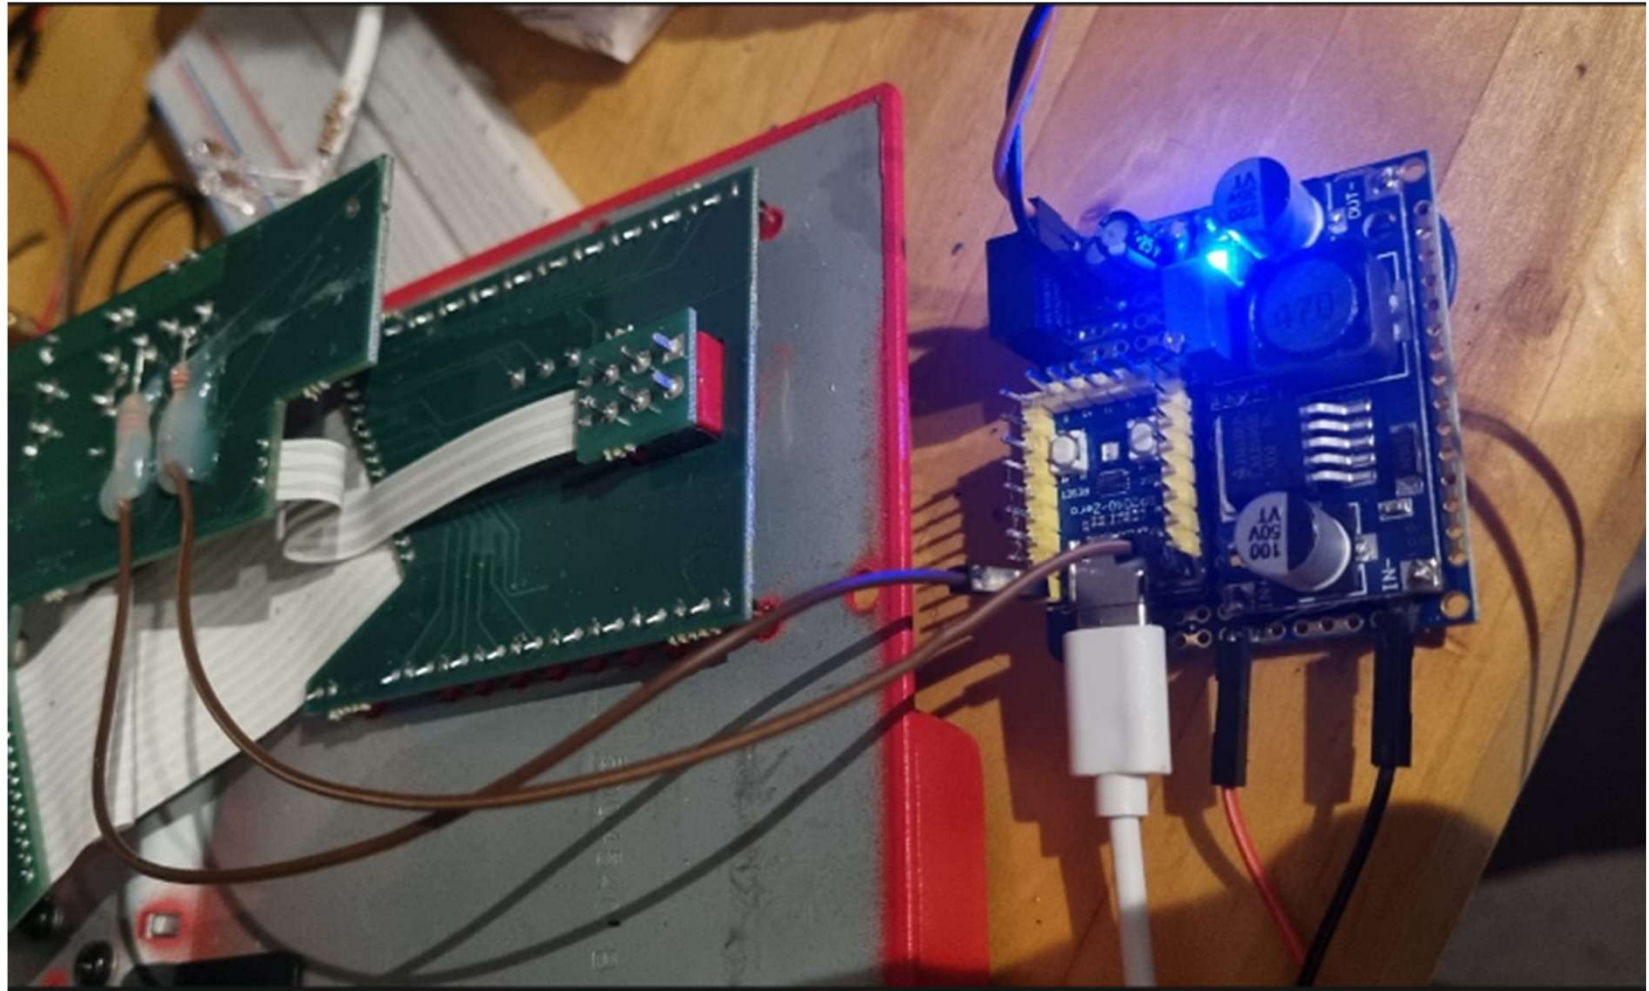

Display

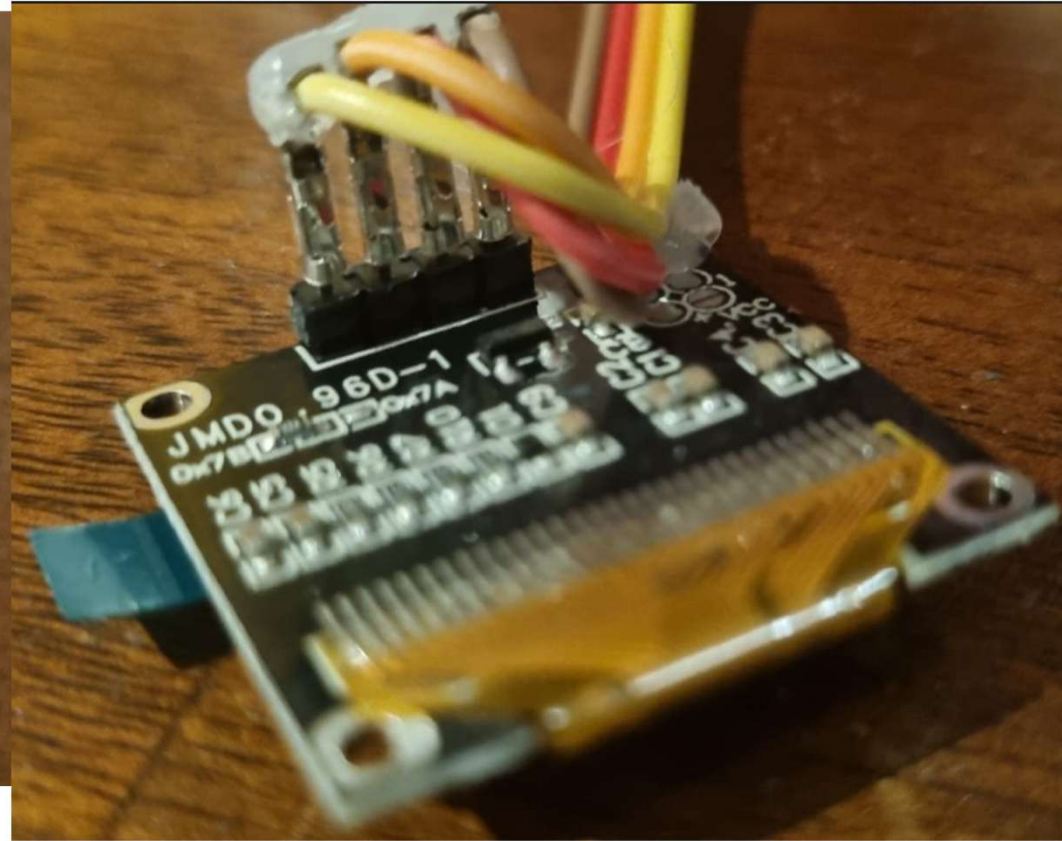



Calibration Switch

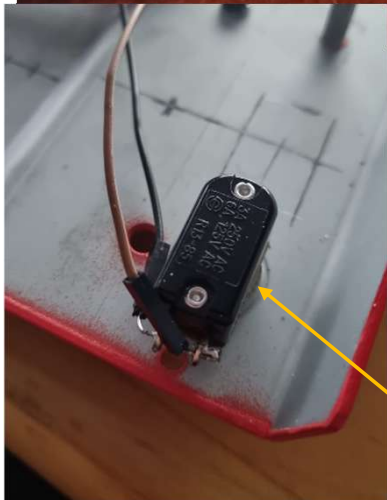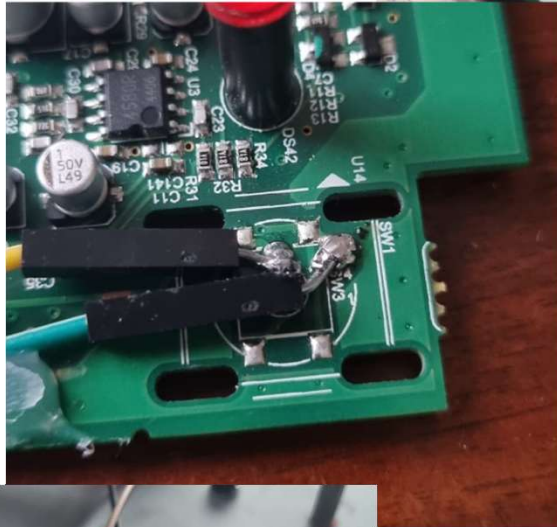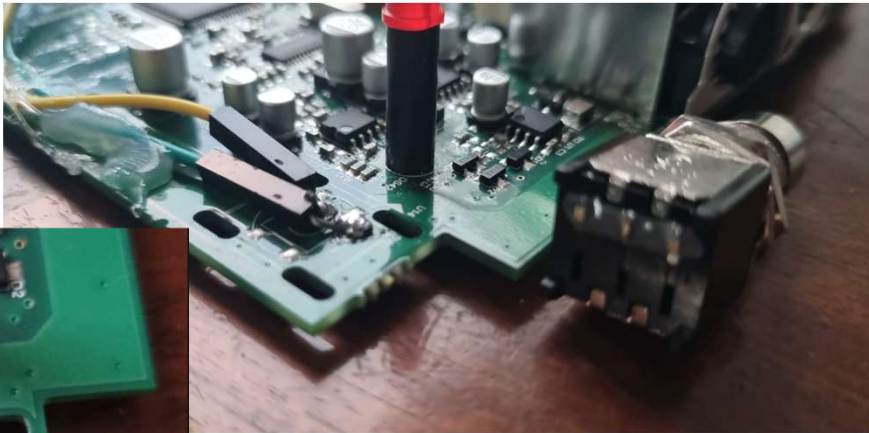


Replace the original switch with the SPST.

Remove the original Effect on/off switch by wiggling it back and forth so that the contacts break off on the switch side.

If you need more solder space, do it from behind.

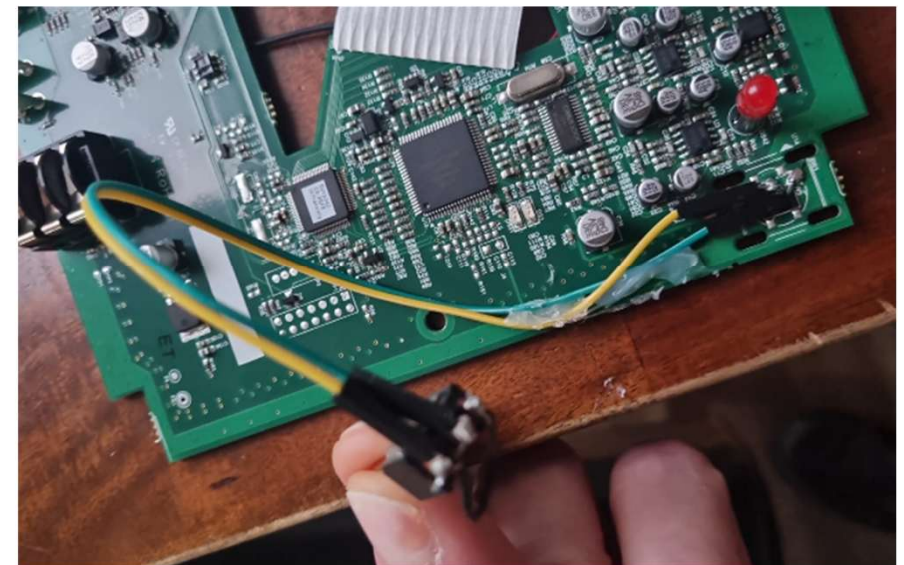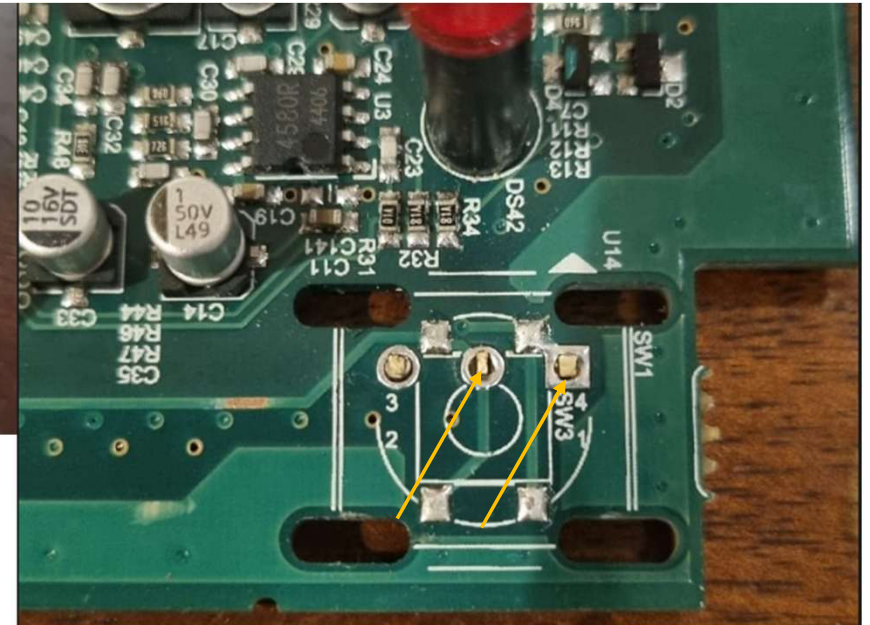


Auto Pedal Return

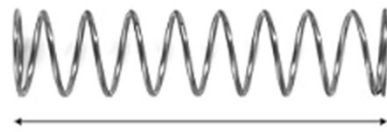

50mm/2in

1,12kg

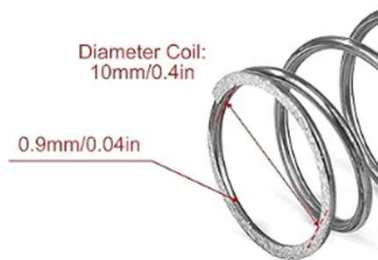

Diameter Coil:
10mm/0.4in

0.9mm/0.04in

