


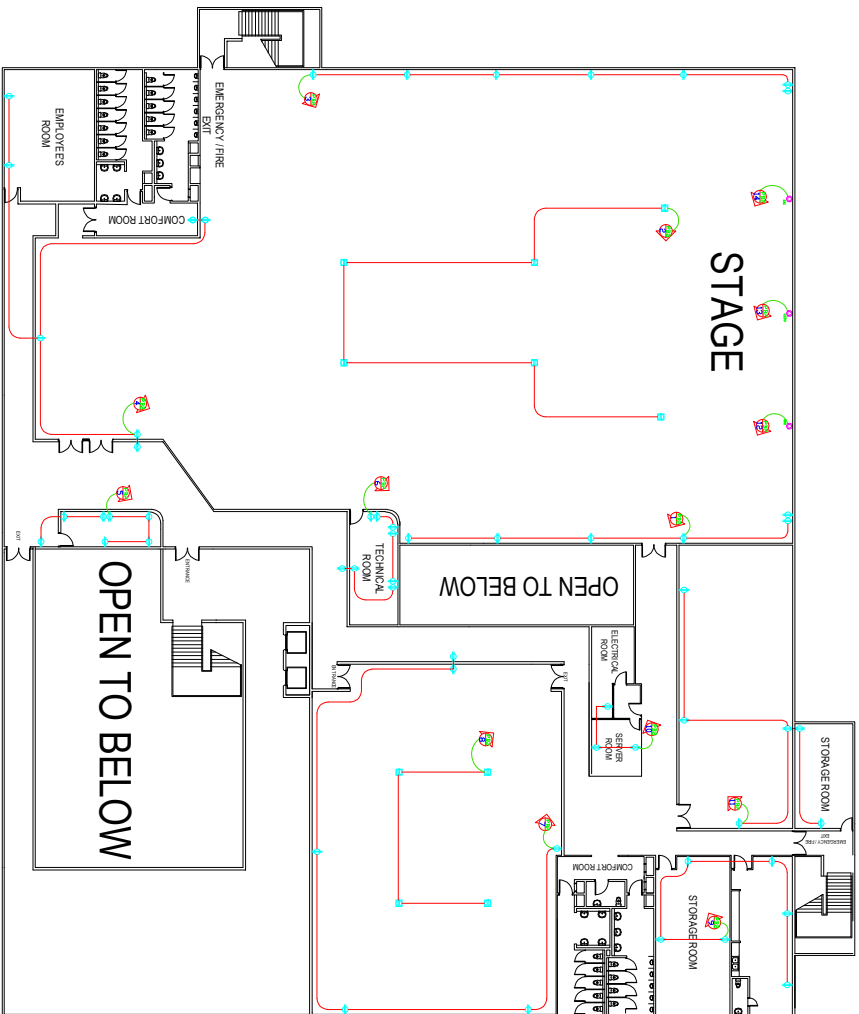

POWER LAYOUT

CONNECTED LOAD COMPUTATION:

**1 LOAD = 49 x 1.73
= 84.77 Amps**


MARKS	SPECIFICATION
	PANEL BOARD
	CIRCUIT HIDERUN
	POWER CIRCUIT LINE
	DUPLEX CONVENIENCE OUTLET
	FLOOR MOUNTED DUPLEX CONVENIENCE OUTLET
	
	SERVICE ENTRANCE
	CIRCUIT BREAKER

LEGEND:

NOTES:

1. ALL WIRE SHALL BE COPPER AND THERMOPLASTIC INSULATED TYPE "THHN" WITH TWO SETS OF 3.5mm².
2. CONDUITS FOR INSTALLATION INSIDE CEILING, WOOD PARTITION, UNDERGROUND OR EMBEDDED IN FLOOR SLAB SHALL BE PVC WHILE FLEXIBLE PVC FROM CEILING TO SWITCHES.
3. MINIMUM SIZE OF CONDUIT TO BE USED SHALL BE 20MM DIAMETER PVC.
4. CONDUITS FOR FEEDER SHALL BE RIGID STEEL CONDUIT WITH A DIAMETER SIZE OF 32mm. THE WIRE SIZE SHALL BE 3 SETS OF 38mm² AND 1 SET OF 8mm² FOR GROUND.
5. ALL POWER CIRCUIT LINE IS THROUGH FLOOR AND WALLING.

PB2 - SCHEDULE OF LOADS										
CKT No.	LOAD DESCRIPTION	QUANTITY	SERVICE VOLTAGE	LOAD PBA			CB SIZE	WIRE SIZE		CONDUIT SIZE
				1a	1b	1c		POLE	AIR	
PB2-1	CONVENIENCE OUTLET (MM)	12.0000	230.0000	2160.0000	9.4		2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-2	CONVENIENCE OUTLET (FW)	12.0000	230.0000	2160.0000		9.4	2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-3	CONVENIENCE OUTLET	14.0000	230.0000	2520.0000			11.0	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-4	CONVENIENCE OUTLET (MM)	14.0000	230.0000	2520.0000	11.0		2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-5	CONVENIENCE OUTLET (MM)	14.0000	230.0000	2520.0000		11.0	2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-6	CONVENIENCE OUTLET (MM)	16.0000	230.0000	2880.0000			12.5	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-7	CONVENIENCE OUTLET (MM)	13.0000	230.0000	2160.0000	9.4		2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-8	CONVENIENCE OUTLET (FW)	8.0000	230.0000	1440.0000		6.3	2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-9	CONVENIENCE OUTLET (MM)	12.0000	230.0000	2160.0000			9.4	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-10	CONVENIENCE OUTLET (MM)	6.0000	230.0000	1080.0000	4.7		2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-11	CONVENIENCE OUTLET (MM)	12.0000	230.0000	2160.0000		9.4	2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-12	SPECIAL PURPOSE OUTLET (MM)	2.0000	230.0000	3000.0000			13.0	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-13	SPECIAL PURPOSE OUTLET (MM)	2.0000	230.0000	3000.0000	13.0		2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-14	SPECIAL PURPOSE OUTLET (MM)	2.0000	230.0000	3000.0000		13.0	2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-15	CONVENIENCE OUTLET	SPARE	230.0000	SPARE			2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
PB2-16	CONVENIENCE OUTLET	SPARE	230.0000	SPARE			2.00	20.0000	2-3.5.0 sqmm, THHN	20mm ²
TOTAL				32760.0000	47.5	49.0	45.9			
CONNECTED LOAD COMPUTATION		1 Load = 49 x 1.73		FEEDER SIZE		Main Breaker Size				
1 Load = 84.77 Amperes				Use 3 - 38sqmm THHN + 1 - 8sqmm THHN for Grounding		125A1 3P, 230V MCB				
				Inside 32mm dia. PVC Pipe						

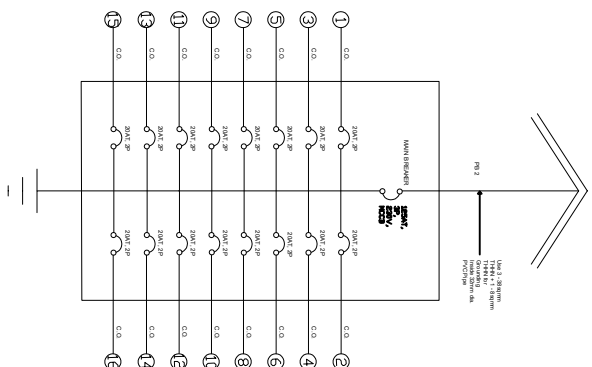[illegible]