


specifications:

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	N.m	g.cm ²	Kg
	Series	1.8	10.2	0.85	12	28	0.8	102	0.5
	Unipolar		7.2	1.2	6.0	7	0.56		

Wiring Diagram:

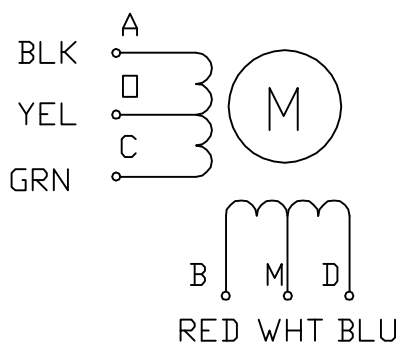


Rotation:

CW DIRECTION	STEP	A	C	B	D
↓	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW direction, see from the shaft end

Dimension:

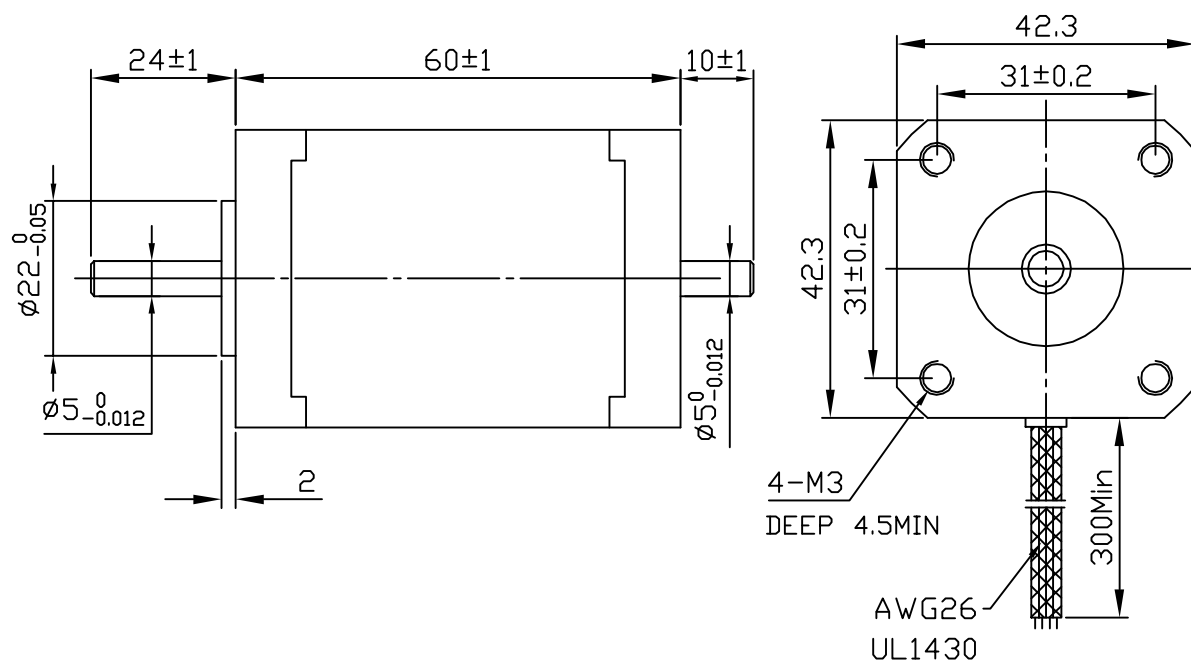

REV	ECN NO	DESCRIPTION	DRN	APP'D	DATE	DESIGN	DATE	P/N.
		UNLESS OTHERWISE SPECIFIED TOLERANCES:				CHECK		TITLE: SPECIFICATION
		DECIMALS: .X ±0.5				APPD		USED ON: FL42STH60-1206B
		ANGULAR: ±0°30'						DWG NO. FX3.162.1289JS
		.XX ±0.25						REV
		.XXX ±0.1						
		UNIT: mm						
		DO NOT SCALE DRAWING						
						SCALE		
						SHEET	OF	
								FULLING MOTOR