



# STEERING DRIVER

## DUAL DC MOTOR DRIVER WITH CURRENT SERNSOR AND FEEDBACK

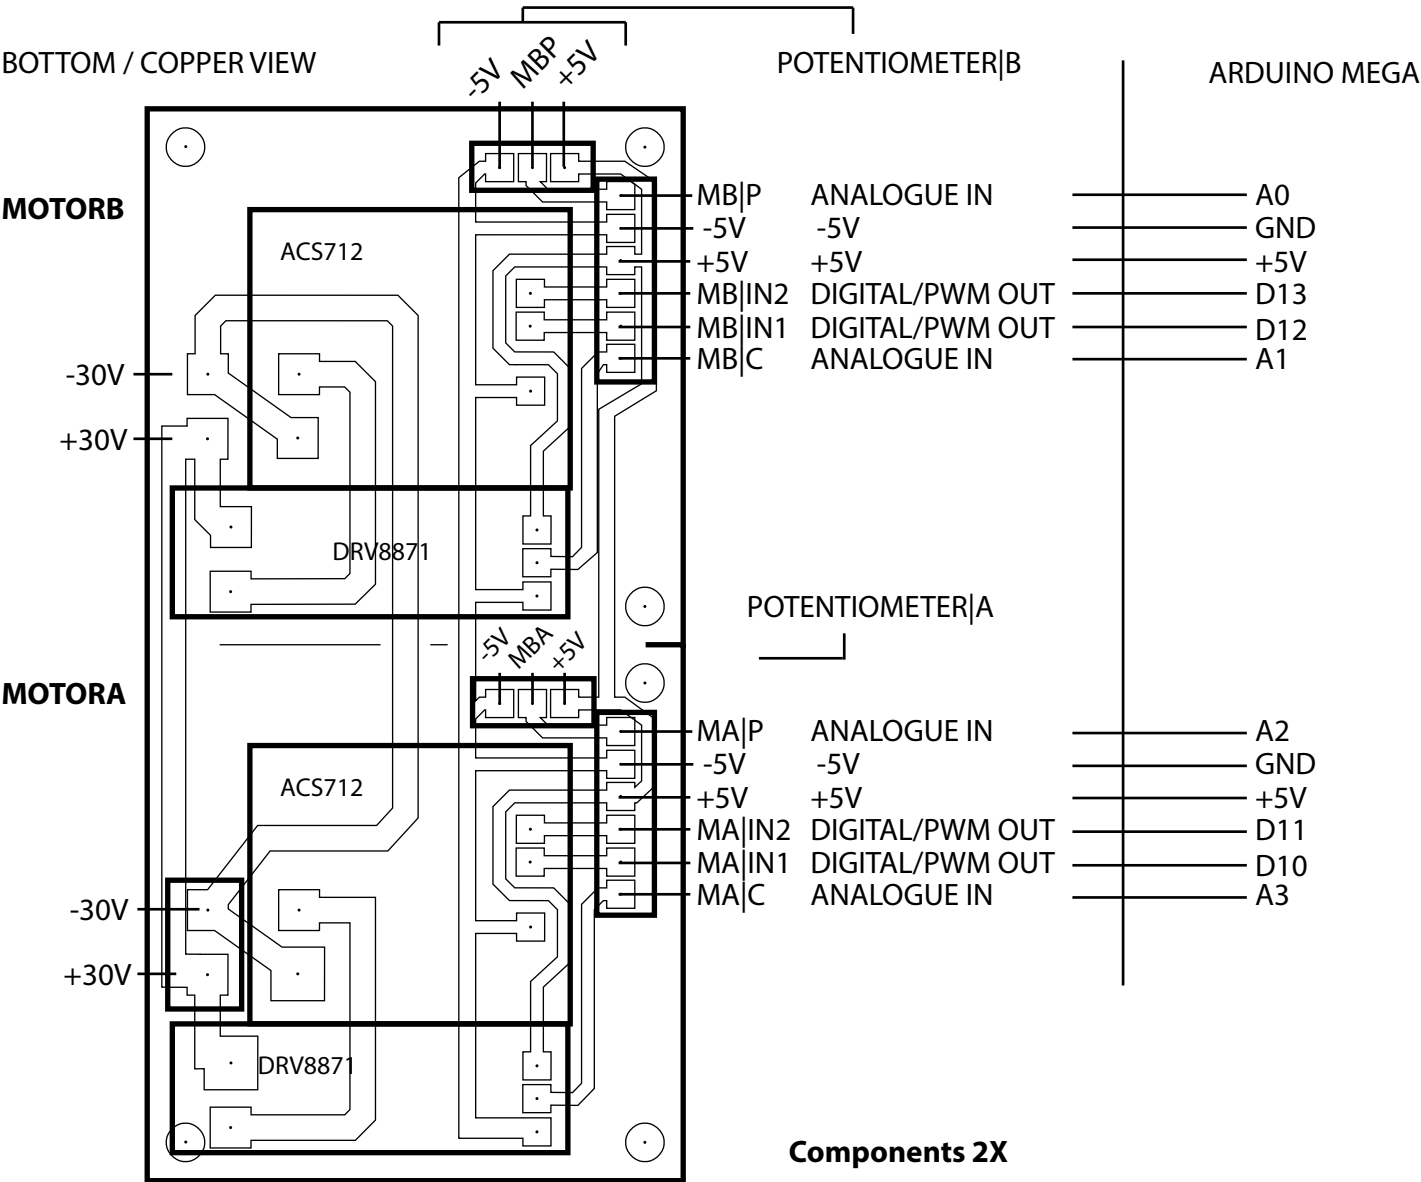

ACTUAL SIZE

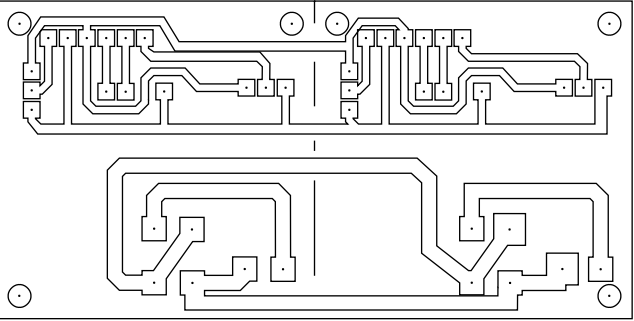

### Components 2X

- Linear Potentiometer B10K Ohm (COM-09939)
- ACS712 5A Range Hall Current Sensor Module
- DRV8871 H-Bridge Brushed DC Motor Driver

- 6-wire ribbon cable 120mm
- 3wire+ cable 350mm (salvaged from mouse)
- 6-pin header female
- 6-pin header male
- 3-pin header female
- 3-pin header male

- 1x 2 pin PCB Terminal