


GPIO signal

Power / VCC

Ground

Conflicts with PSRAM

New / fixed in proposal

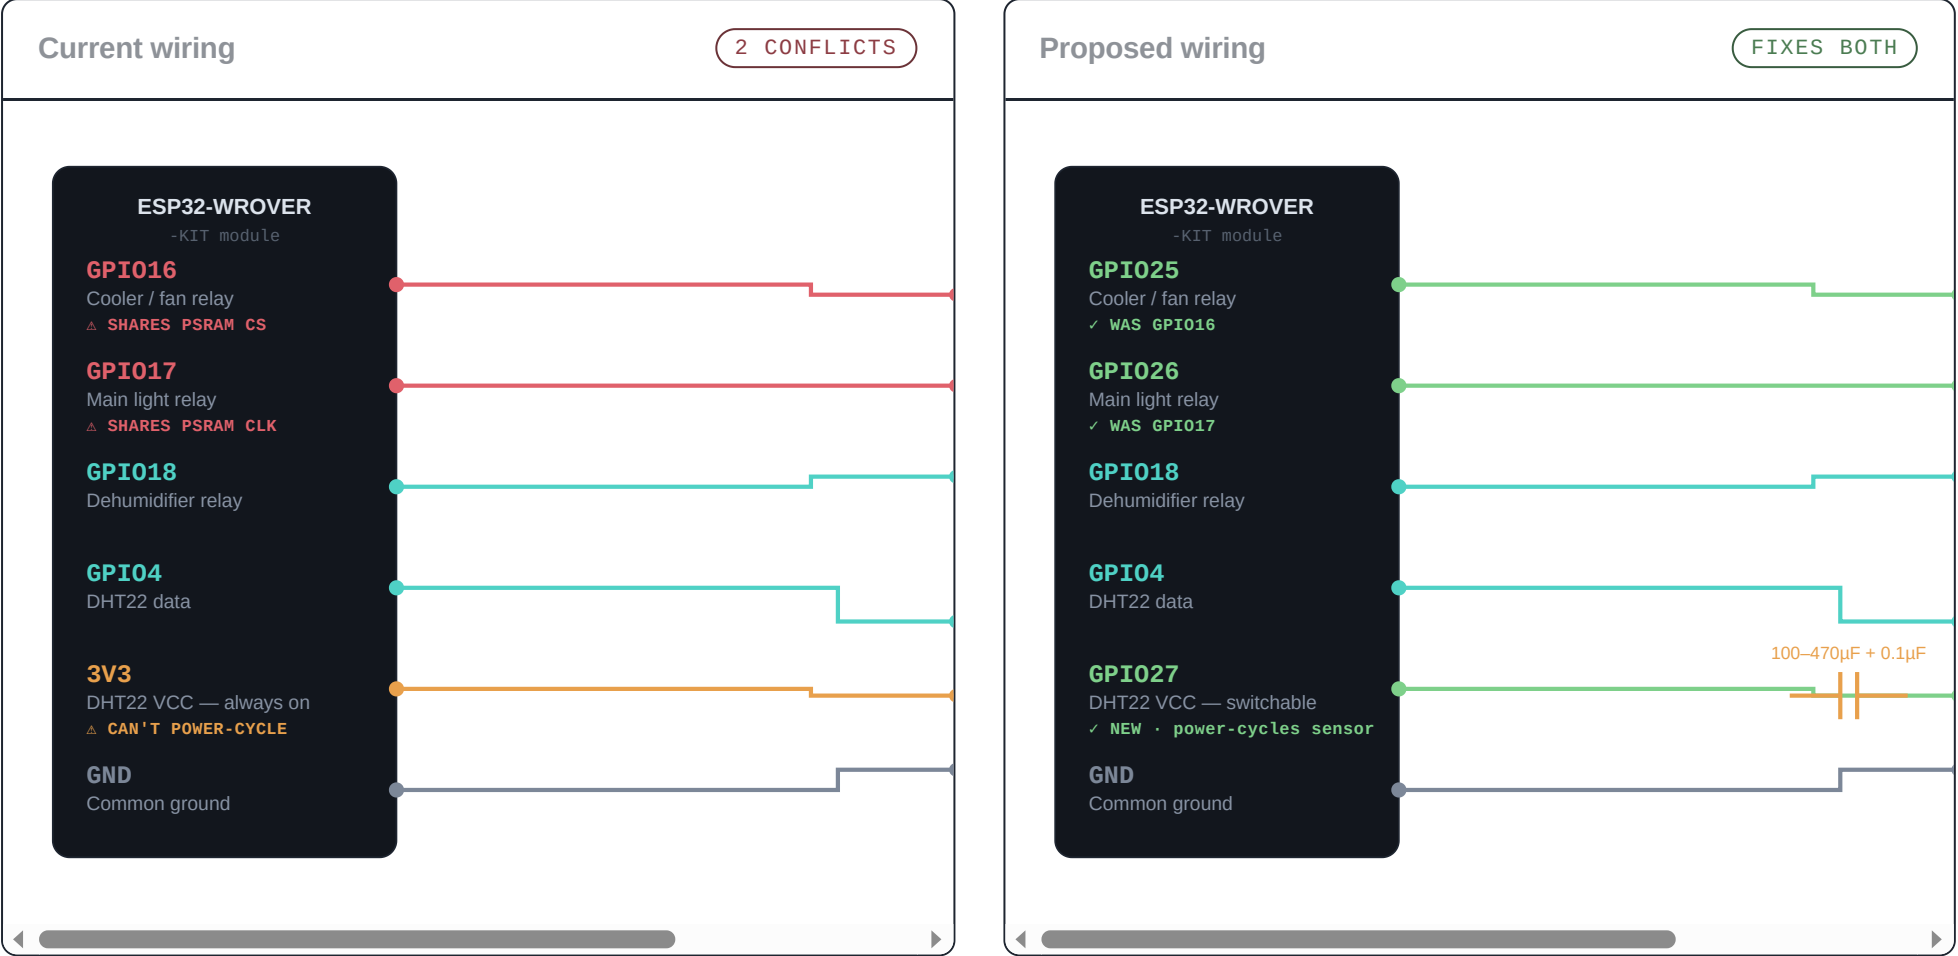

Pin reference

Same data as the wiring diagrams above, as a flat table for quick lookup while soldering.

FUNCTION	CURRENT PIN		PROPOSED PIN	NOTE
Cooler / exhaust fan relay	GPIO16	→	GPIO25	Moved off the WROVER module's internal PSRAM CS line
Main light relay	GPIO17	→	GPIO26	Moved off the PSRAM CLK line
Dehumidifier relay	GPIO18	—	GPIO18	Unchanged, no conflict
DHT22 data	GPIO4	—	GPIO4	Unchanged
DHT22 VCC	3V3 rail	→	GPIO27 (new)	Lets firmware hard power-cycle the sensor after prolonged read failure
Common ground	GND	—	GND	Unchanged
Brownout suppression	— physical addition only, no pin —			100–470µF electrolytic + 0.1µF ceramic across DHT22 VCC/GND, right at the sensor

!

Verify GPIO25/26/27 against your specific WROVER-KIT board revision before wiring — the dev board also breaks some GPIOs out to a camera header and JTAG, and the exact mapping differs between hardware revisions (v3 vs v4.1). If any of these three are already spoken for, GPIO13, GPIO14, GPIO32, or GPIO33 are equally valid substitutes — none are used by this firmware today.