
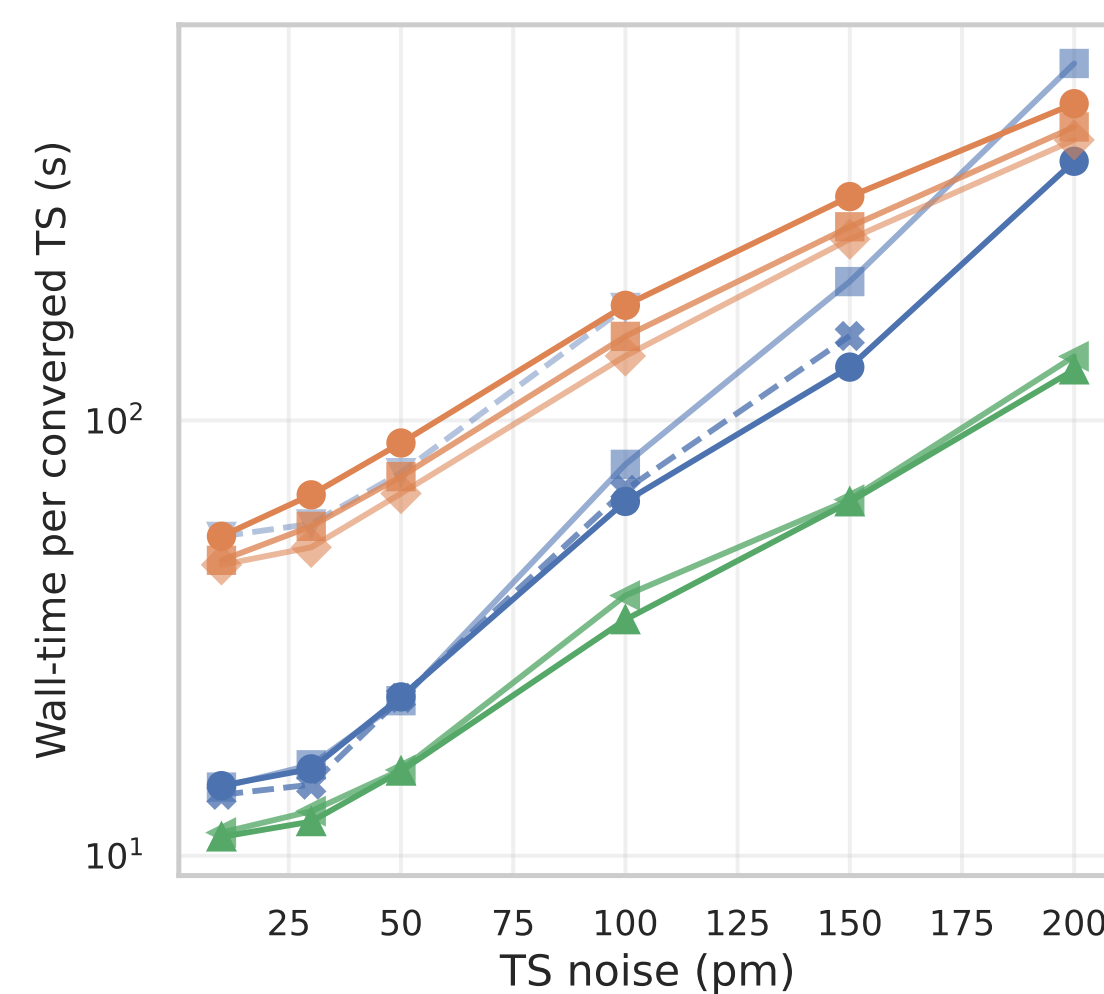
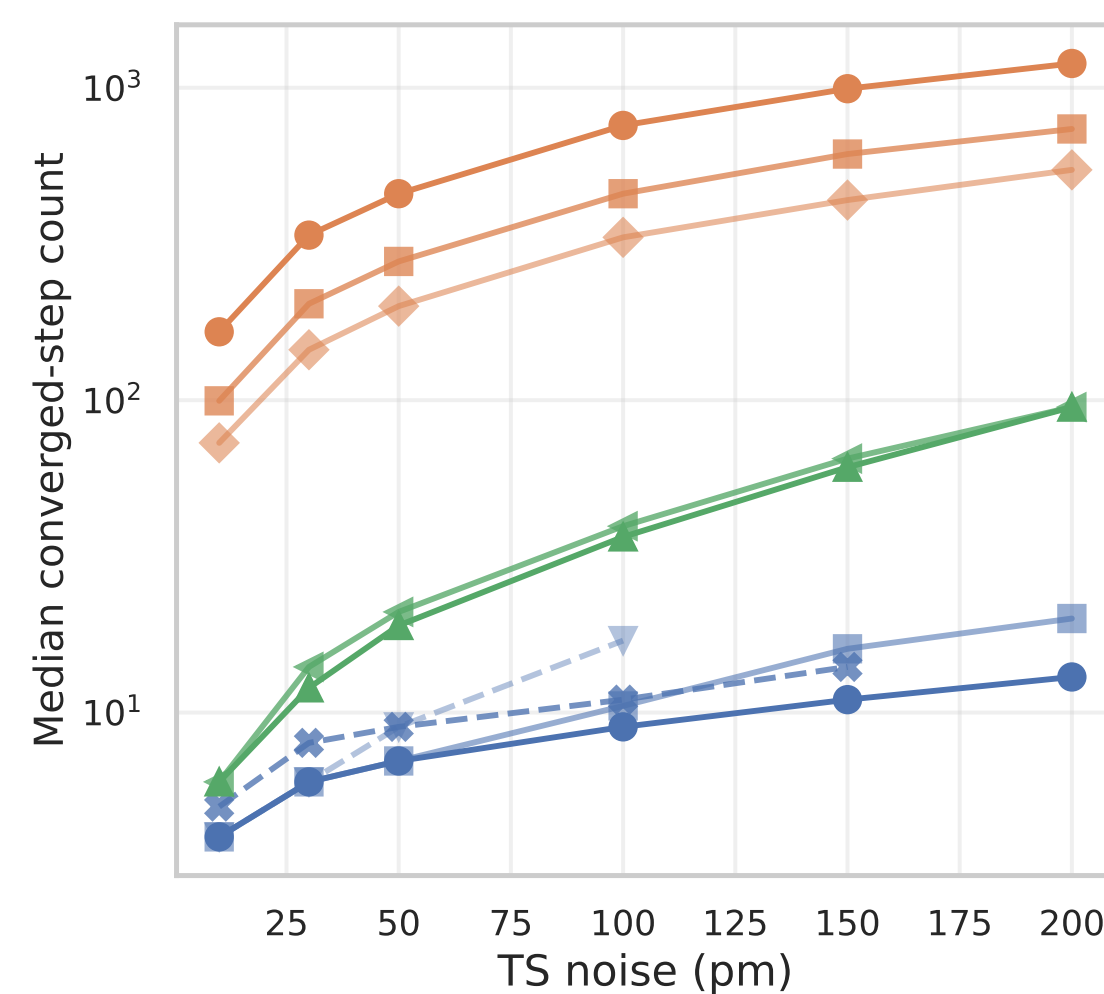
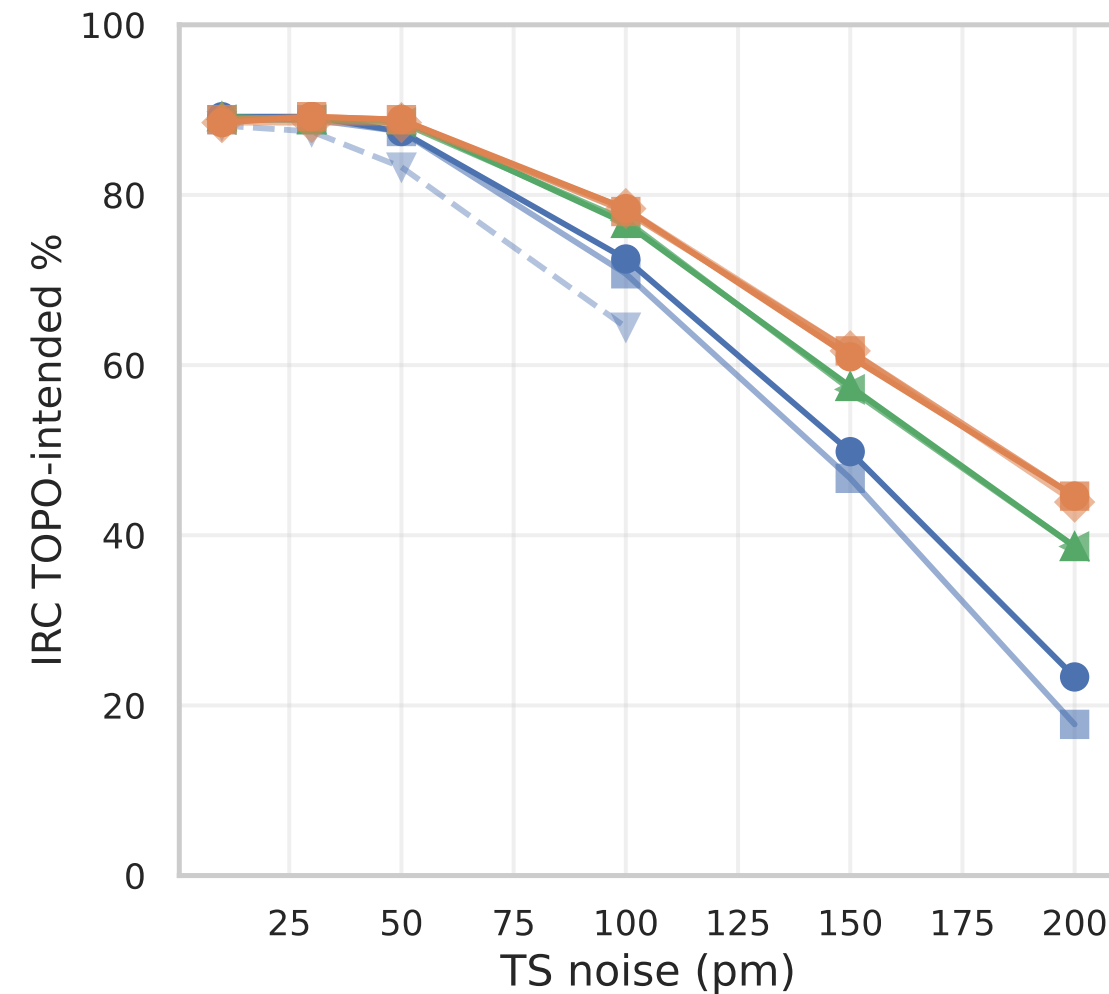


4-axis comparison at  $F_{\max} < 0.01$  — Project canonical, starting from NOISED TRUE TS

TS conv % (Im. Freq. and  $F_{\max} < 0.01$  — project canonical)

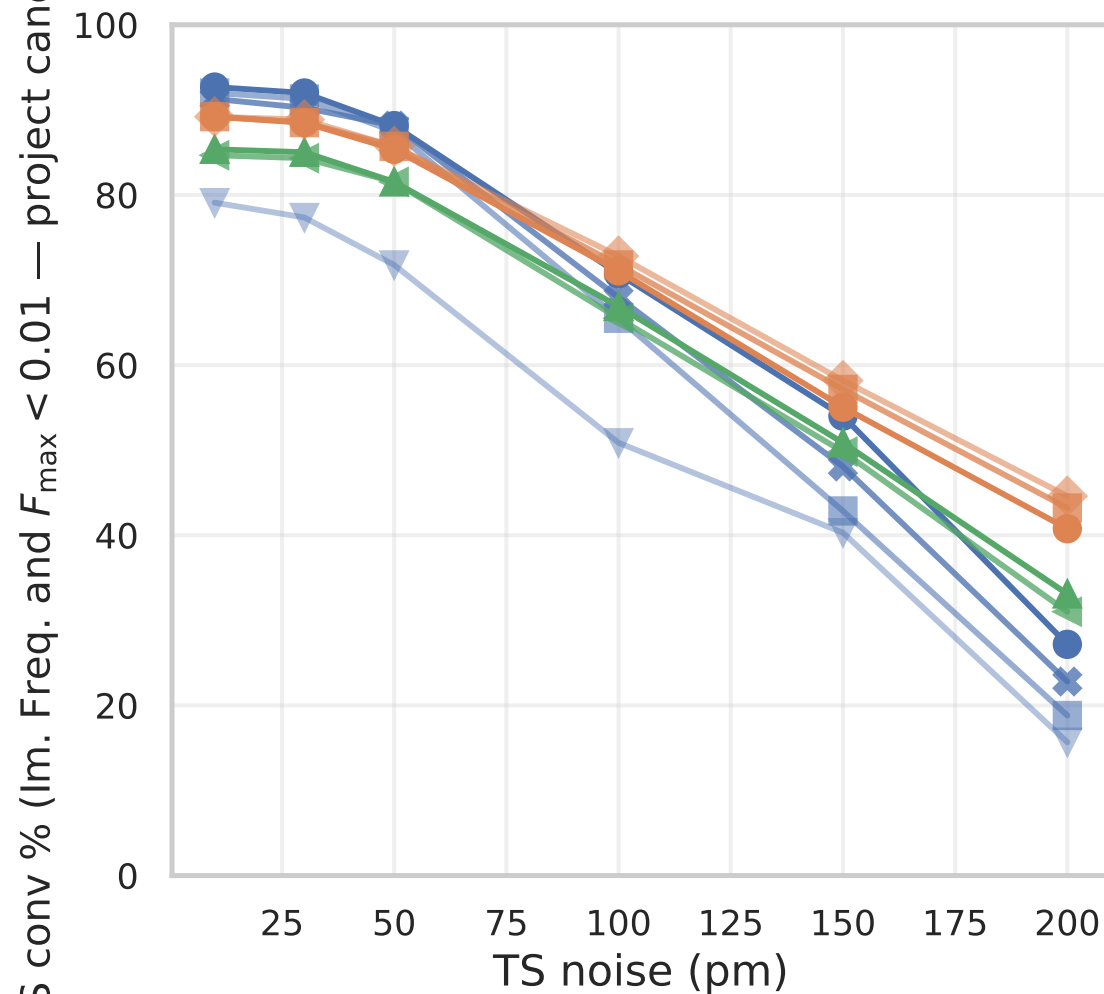

- Sella cartesian Eckart untuned Hess.Freq.=1
- ◆ Sella cartesian Eckart untuned Hess.Freq.=3
- Sella cartesian tuned Hess.Freq.=1
- ▼ Sella internal tuned Hess.Freq.=1
- ▲ Hybrid damped Eckart eig tr=0.05
- ◀ Hybrid undamped Eckart eig tr=0.05
- GAD dt=0.003
- GAD dt=0.005
- ◊ GAD dt=0.007