

**Project on**  
**Face Recognition Based Smart Door System**

Submitted for the partial fulfilment of the award of

**Degree**

**In**

**Computer Science and Engineering**

**By**

Saurabhjyoti Deuri (D/18/CS/103)

Dhrubark Sarmah (D/18/CS/106)

Under the Supervision of

**Dr. Monjur Saikia**

Assistant Professor

(Department of Computer Science and Engineering)



**North Eastern Regional Institute of Science and Technology**  
**Nirjuli-Itanagar-Arunachal Pradesh**

**Session: 2021**

## **CERTIFICATE OF APPROVAL**

Certified that the project report entitled "**Face Recognition Based Smart Door System**" is a bonafide work carried out jointly by **Dhrubark Sarmah (D/18/CS/106)** and **Saurabhjyoti Deuri (D/18/CS/103)**. The project report embodies the original work done by them towards partial fulfilment of the requirements for the award of the degree of **Bachelor of Technology in Computer Science and Engineering at North Eastern Regional Institute of Science and Technology, Arunachal Pradesh**. It is understood by this approval that the undersigned do not endorse or approve any statement made, opinion expressed or conclusion drawn therein, but approve the project report only for the purpose for which it has been submitted.

Dr. Monjul Saikia  
(Project Guide)  
Asst. Professor

(Department of Computer Science &  
Engineering)

Mr. Ashwini Kumar Patra  
(Project Coordinator)  
Asst. Professor

(Department of Computer Science &  
Engineering)

Dr. Moirangthem Marjit Singh  
(Head of Department)  
Department of Computer Science & Engineering

## **DECLARATION**

We hereby declare that the project entitled "**Face Recognition Based Smart Door System**", is submitted to the North Eastern Regional Institute of Science and Technology, Nirjuli; is a record of an original work done by us, **Dhrubark Sarmah** and **Saurabhjyoti Deuri** under the constant abled guidance of our respected teacher and guide, **Dr. Monjur Saikia**. This report is submitted in partial fulfilment for the award of degree of Bachelors of Technology in Computer Science and Engineering. The results embodied in this thesis have not been submitted to any other University or Institute for the award of any degree or diploma.

**Saurabhjyoti Deuri**  
**D/18/CS/103**

**Dhrubark Sarmah**  
**D/18/CS/106**

## **ACKNOWLEDGEMENT**

After the completion of major project work, words are not enough to express our feelings about all those who helped us to reach our goal, feeling above this is our indebtedness to the almighty for providing us this moment in life.

First and foremost, we would like to take this opportunity to express our deep regards and heartfelt gratitude to our project guide **Dr. Monjul Saikia (Assistant professor), Department of Computer Science & Engineering(NERIST)** for his inspiring guidance and timely suggestions in carrying out our project successfully. He has also been a constant source of inspiration for us. Working under his guidance has been an opportunity for us to learn more and more.

We are extremely thankful to **Dr. Moirangthem Marjit Singh (HOD), Department of Computer Science and Engineering, (NERIST)** for cooperation and motivation during the project.

We extend our deepest gratitude to **Dr .H.S Yadav, Director (NERIST)** for providing all the necessary facilities and true encouraging environment to bring out the best of our endeavours.

We would also like to thank all the teachers of our department for providing invaluable support and motivation. We are also grateful to our friends and colleagues for their help and cooperation throughout this work. Last but not the least; we thank our family for their support, patience, blessings and understanding while completing our project.

## **ABSTRACT**

This significance of the project work is about the Facial Recognition and its applications in different areas of genuine real world using Raspberry Pie, OpenCV programming and different significant libraries. Because of upgraded development and modern, making life easier. People search for ways of doing things effectively and which saves time and energy. So hence, the automated doors are one of many models that a person concocts. Programmed entrance/leave entryway control is broadly utilized out in the open places, for example, shopping centers, transportation stations, air terminals, and theaters store to take out the need of physically opening and shutting activities. Shrewd Door framework gives advance robotization to proprietors. The savvy entryway project is an inventive access control framework, in light of item location. The proposed framework can initially recognize an article with the assistance of camera sensor and on the off chance that the item is in wanted range, the camera will catch the face and afterward contrast the picture recently caught and the data set.

## **TABLE OF CONTENTS**

<u>Chapter No.</u>	<u>Chapter Title</u>	<u>Page no.</u>
1	Introduction 1.1 About the work 1.1.1 Existing System 1.1.2 Limitations 1.2 Motivation 1.3 Objectives and Contribution	8-9
2	Preliminaries and Background 2.1 Literature Survey 2.1.1 Embedded System 2.1.2 Referred Methods 2.1.3 Related Works 2.1.4: Recognition algorithm	9-12
3	Proposed Work 3.1 Working 3.2 Flowcharts 3.3 Block Diagrams 3.4 Hardware Requirements 3.4.1 Raspberry Pi 4 model B 3.4.2 Micro SD Card 3.4.3 12 Volt DC Power Adapter 3.4.4 Relay Driver 3.4.5 Pi Camera 3.4.5 Jumper Wire 3.4.6 Solenoid lock 3.5 Software Requirements 3.5.1 Open CV 3.5.2 Computer Vision 3.5.3 Python	13-25

4	Experiments and Results	26-31
	4.1 Model of the Project	
	4.2 Implementation	
	4.3 Result	
5	Conclusion and Future Scope	32
	5.1 Future Scope	
	5.2 Limitations	
6	References	33

# **Chapter 1: INTRODUCTION**

## **1.1 About the work**

Opening and shutting of entryways is dependably a monotonous work, particularly in places like shopping centres, air terminals, lodgings, emergency clinics and theatres where an individual is constantly expected to open the entryway for guests. For individuals in wheelchairs(handicapped people), opening the door is undeniably challenging.

In distribution centres and different offices where individuals habitually have their hands full, adding to somewhere safe and secure and effectiveness by making it more straightforward for individuals to get around.

### **1.1.1 System Existed**

To operate the entryway naturally with the utilization of a savvy Facial Recognition System, the conventional way is to physically open and close the entryway which is by all accounts extremely dreary to be relevant in our bustling everyday life.

### **1.1.2 Disadvantages**

Human effort is required to manually open and close a door in the usual manner. It is a time-consuming and exhausting task.

## **1.2 Motivation**

Shrewd entryway framework gives advance mechanization to proprietors. We have seen programmed entryway openers in shopping centres, theatres and business structures. These frameworks are utilized to open the entryway when an individual approaches the entry of the entryway and close it after went into the entryway. The project proposes an autonomous door opening and closing system that detects any authorized person movement near the door.

## **1.3 Objective and Contribution**

The principal objective of this task is to make a practical and working Face acknowledgment based Smart Door System utilizing Raspberry Pi (4B). The point of our venture is to give a high security framework utilizing Face Recognition innovation on Raspberry Pi, this will build the security of our undertaking. We have seen programmed entryway opening frameworks in shopping centres, theatres, air terminals, stockrooms, clinics and business structures. In this sort of spots or other numerous different spots

opening and shutting of entryways physically is consistently a monotonous work. Where an individual is constantly expected operate the entryway.

For individuals with disabilities who cannot walk and other impaired people, since ordinary entryways can be exceptionally difficult to work with. This could be difficult to use a regular entryway while situated in a wheelchair and as such a shrewd framework comes in exceptionally convenient.

The proposed work is as per the following:

- 1) Set up the Raspberry Pie climate with the framework that we will chip away at.
- 2) Installation of the multitude of required libraries on the framework.
- 3) Linking of camera module to catch Face picture (live).
- 4) Make an information base containing approved individual.
- 5) Capture current face, save it and contrast and information base pictures.
- 6) Interface hand-off as a result module.

## **Chapter 2: Preliminaries and Background**

### **2.1 Literature Survey**

#### **2.1.1 Embedded System**

As an innovation, implanted framework is exceptionally helpful, on the grounds that in today time every one of the undertakings are currently implanted. "An implanted framework is a PC that has a dedicated capacity within a larger mechanical or electrical framework, and is frequently used for continuous processing. It is frequently implanted as part of a larger device that includes equipment and mechanical pieces." [17] As such implanted framework is characterized as "An approach to working, coordinating or performing one or many errands as per a proper arrangement of rules, program or plan."

In our undertaking as well, implanted framework is utilized as the innovation. The equipment a piece of framework comprises a hand-off module, a solenoid entryway lock, Raspberry Pi(4B) matched with the Raspberrian OS. Brilliant entryway framework is a proper utilization of inserted innovation.

Different instances of installed framework are as per the following:

Time shows framework (a watch)

Programmed fabric washing framework (clothes washer)

"Rather of being a generically helpful PC for a variety of tasks, inserted frameworks are designed to perform a specific task. Some have ongoing execution requirements, such as

security and convenience; others may have low or no exhibition requirements, allowing the framework equipment to be enhanced to reduce costs.” [9]

Current inserted frameworks are much of the time in view of microcontrollers (for example Computer processors with coordinated memory or fringe interfaces) and devoted to explicit errands, Embedded frameworks range from convenient gadgets, for example, advanced watches and MP3 players, to huge fixed establishments like traffic signals, production line regulators, and generally complex frameworks like half and half vehicles, MRI. “With a single microcontroller chip, complexity is low; with several units and peripherals, complexity is extremely high.” Implanted frameworks are broad in buyer, modern, business and route administrations. Telecom frameworks utilize various installed frameworks from phone switches for the organization to cell phones toward the end-client. PC organizing utilizes committed switches and organization scaffolds to course information.

## **Major Components of embedded System Processors:**

It is the embedded system's central processing unit, commonly known as the brain. The hardware is responsible for running the software and controlling the operations of all the other circuits.

### **Storage Device:**

It is utilized to introduce the product (Raspbian OS). In our very project we have utilized a 64GB SD card as memory source. It likewise gives capacity to information, for example, program factors, transitional outcomes and some other information produced all through the activity.

### **2.1.2: Referred Methods**

In our very project we have alluded to such a generally existing technique which essentially fills in as follows. Subsequent to setting up the climate in the framework, with the assistance of different programming we make a data set, which essentially stores the face information of the relative multitude of approved people. So on the off chance that an article comes before the camera (PiCamera) it identifies the item and perceives whether. It is a human, it then catches the picture of the individual it identifies and afterward contrasts it and the information base put away and performs essential activities on the equipment.

### **2.1.3: Related Works**

Implanted frameworks range from no UI by any means, in frameworks devoted exclusively to one errand, to complex graphical user interfaces which looks like the present day personnel's computers work area. Basic inserted gadgets use buttons, LEDs, realistic or character LCDs with a straightforward menu framework. Implanted systems are often found in machines which are intended to run continuously for a long duration time without any errors and to occasionally recover if a blunder occurs. As a result, the product is developed and tested more carefully than that for personnel computers, and inconsistent mechanical parts, such as circle drives, switches, or fasteners, are avoided.

### **2.1.4: Recognition algorithm**

Haar cascade:

The Haar Cascade algorithm is the strategy where a sectionalisation is bored from a lot of positive and negative photographs. This sectionalisation pursues an AI system in which a fountain activity is taught from the photographs to find things in extra photographs. Face identification and looks in a picture are likewise effectively recognized. The activity is done by setting values greater than zero and lesser than zero pictures to the classifier. Then the attributes are somewhat long from the image. Every trademark is a singular worth, which is procured by taking away amount of pixels in white square shape from summation of pixels in dark rectangle. In which it distinguishes the essences of various person in various conditions. The Haar-like component of variable dimensions can be determined in consistent time in view of basic pictures.

The above strategy can be defined in four stages:

1. Searching for Haar Features
2. Generating Integral Images
3. Utilizing Adaboost
4. Utilizing Cascading Classifiers

**Calculating Haar Value:**

Pixel value = (Sum of dark pixels/Number of dark pixels)-  
(Sum of light pixels/Number of light pixels)

**Accuracy Calculation:**

$$\alpha = \frac{\beta + \gamma}{\beta + \gamma + \delta + \theta} \quad \text{eq. 1}$$

Where  $\alpha$  = Accuracy

$\beta$  = True Positive

$\gamma$  = True Negative

$\delta$  = False Positive

$\theta$  = False Negative

Obtained Accuracy rate for the Haar cascade is 96.24%.

## **Chapter 3: Proposed Work**

### **3.1: Working**

It, most importantly, is guaranteed that the association are done precisely and appropriately then it is made sure that the framework is associated with a satisfactory power supply (2000mAh Li-Ion) so it gets sufficient ability to appropriately run. At the point when the framework is dynamic an article (say human) moves toward neighbouring the framework distinguishes it and attempts to catch the face and afterward run face acknowledgment calculations on it. Before full arrangement of the framework it is prepared well with adequate measure of datasets so the framework become precise and immaculate. After the calculation is applied on the caught picture by the USB camera it then speaks with the related information base to confirm the character of the individual. In the event that a match is found it shows the name of the individual on the screen and afterward invites the individual by opening the entryway.

This sort of mechanized brilliant entryway frameworks saves a great deal of time and is safer when contrasted with unique finger impression palm print entryway lock frameworks and has a wide assortment applications on genuine world.

Face Detection is the utilization of picture handling methods to decide whether the picture is/has a human face or not. It is practically equivalent to protest recognition, however the particular and reliable elements of the human face make face discovery a more educated task feasible by hand-tuned highlight descriptors and traditional picture handling strategies. Face identification is the forerunner to confront acknowledgment. Face identification in a scene with numerous individuals or items presents difficulties in confinement of the jumping box for the face.

Essential thought is to search normal person's face characteristics in a picture. Normal characteristic face highlights have:

- 2 eyes with black masses.
- An in the middle of between the two eyes.
- A level surface over the eyes ( temple ).
- A couple of lips beneath the nose extending on a level plane.

There are many such highlights, recognising a person's face is a reasonably intricate calculation and a tedious process.

### Normally used Face Detection and Recognition Techniques:

“The Viola-Jones calculation for face identification utilizing Haar Feature-based overflow classifier is a famous picture handling method. Histogram of Gradient (HOG)-based highlight descriptors are broadly utilized in the Haar overflow technique. OpenCV, the biggest open-source PC vision library, has an inbuilt execution of the Haar Cascade-based face recognition calculation with a pre-prepared classifier for human face characterization.” [3]

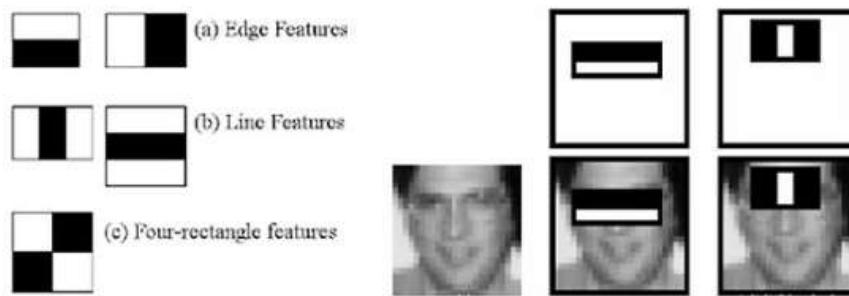


Fig: Common feature detectors and their corresponding on the human face

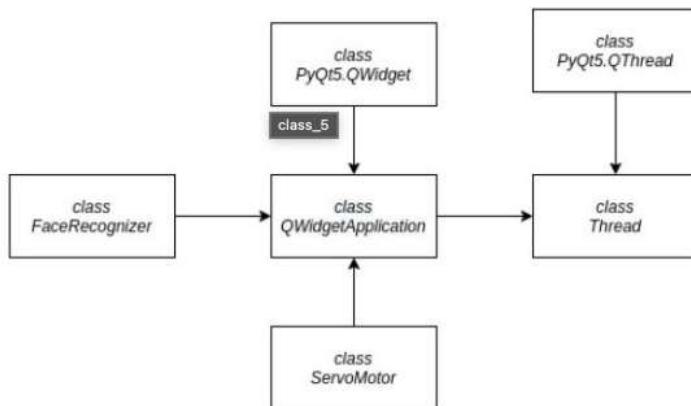


Fig: Class Architecture for the Face Recognition.

### Important libraries used in the project are:

1. dlib –It is a deep learning and machine learning efficient library. It is written in C++ but supports python's bindings.
2. face\_recognition –It is a face recognition library in Python.
3. RPi.GPIO –General Purpose Input Output pins are controlled with the help f this library.
4. OpenCV –It is library which uses Computer used to read image and update annotation on it

### 3.2: FLOW CHART

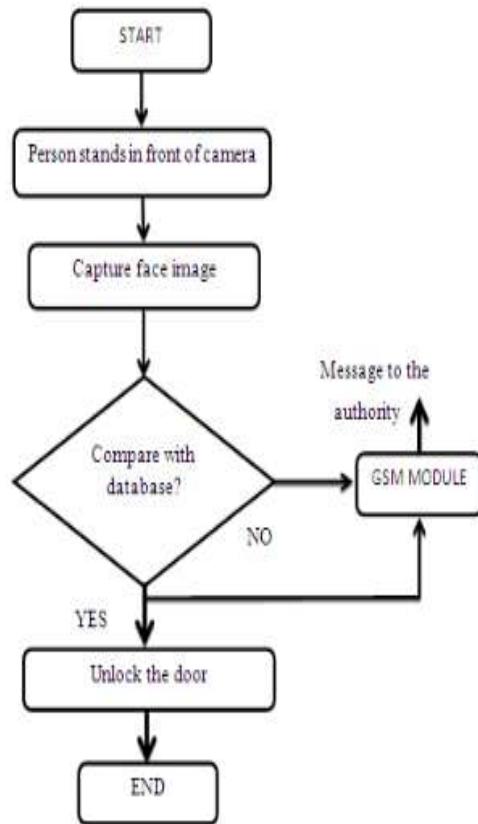


Fig: Flowchart of Image capturing and database comparison.

### 3.3: BLOCK DIAGRAM

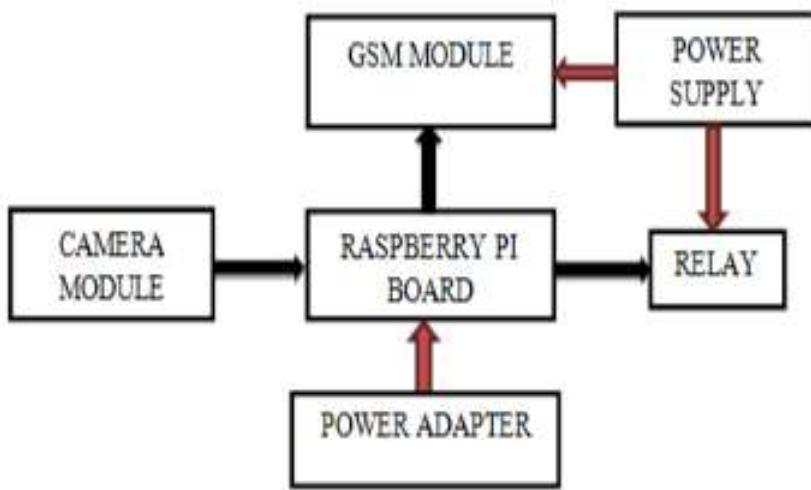


Fig: Block diagram of “Raspberry pi based face recognition system for door unlocking”.

### 3.4: HARDWARE REQUIREMENTS

#### 3.4.1 Raspberry Pie 4 (model B)

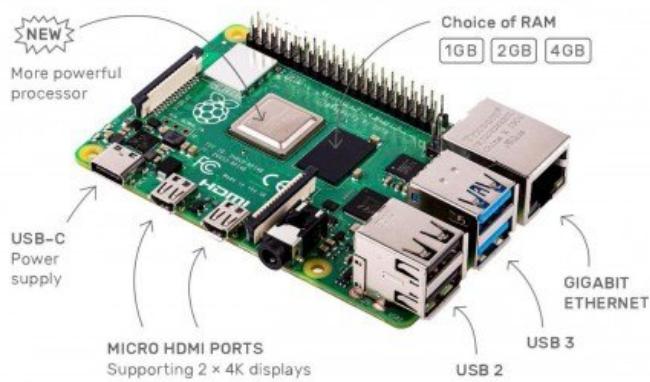


Fig: Raspberry Pi 4b

A Raspberry Pi is a little computer with a lot of power, which can be plugged into external hardware like monitor, keyboards, etc to give full functionality of a computer. It can perform all the computation, run programming languages, run games, videos, basically everything a normal computer can do just in a compact form. It can communicate and control external peripherals through the various GPIO (General Purpose Input Output) pins.

### **3.4.2 Memory Card (SD micro 32 GB)**

A memory card is electronic data storage device which can store flash data normally. It is used for storing information in digital form. These are portable memory bands. It can be used on the go and has a lifespan of more than 5 years. They have significantly been evolved with fast transmission speed and huge memory band capacity in ranges of 512 GBs.



Fig: SD Card

### **3.4.3 12volt DC Power Adapter**

A power source of 2000mAh to juice up the system so that it supplies enough power that is required by the system to work flawlessly.



Fig: 12 V DC Adapter

### 3.4.5 The Relay Module

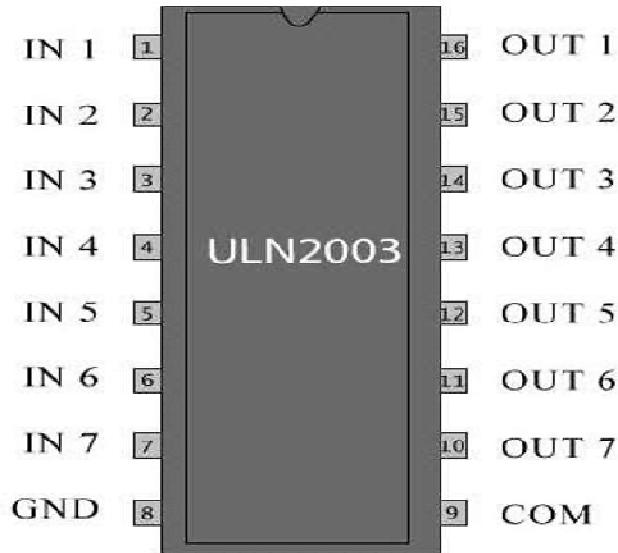


Fig: Relay Module ULN2003

A Relay module is an electronic element which is used to combine electrical entities.(say AC voltage and DC voltage). We use a Relay module in various applications like when we want to switch on a electric fan or a bulb with a microcontroller because the microcontroller always operate on the low voltage which is DC voltage which is about 5Volt DC voltage but on the other hand the electric fan or a bulb will operate on the AC voltage. A relay module combines DC voltage and AC voltage. The ground pin of the relay module is connected to the ground terminal of the Raspberry Pi board VCC should be connected with the 5volt Raspberry Pi board. The pins marked as IN stands for input pins. It also has LEDs to indicate the status of the module and during the application time the LED turns ON to indicate that the hardware is alright and functioning properly. There is also a component at the Relay module known as the Auto coupler which basically separates the AC and the DC voltages.

The ULN2003 is known for its high-current, high-voltage limit. The drivers can be resembled for much higher momentum yield. Much further, stacking one chip on top of another, both electrically and actually, has been finished. For the most part it can likewise be utilized for interacting with a stepper engine, where the engine requires high evaluations which can't be given by other connecting gadgets.

### **Feature**

- 500 mA rated collector current (single output)
- 50 V output (a variant with 100 V output is also available)
- Includes output flyback diodes
- TTL and 5-V CMOS logic compatible inputs

### **Application**

The ULN2003A is commonly used in relay, lamp, and LED display driver circuits, stepper motors, logic buffers, and line drivers.

### **3.4.6 PiCamera**



Fig: PiCamera (5MP)

A PiCam is one of the fundamental instruments for the task. At the point when an individual or article moves toward neighbouring, the framework sees, catches a computerized picture of it and afterward recognizes it as an enrolled substance or not, on the off chance that the article is distinguished effectively the entryway lock is opened else it will stay close. The picture ID occurs through an innovation called OpenCV.

Preceding full sending of the framework the calculation is prepared well with different datasets.

### 3.4.7 Jump Wires



Fig: Jump Wire

A jump wire is basically a connecting wire which has pins attached at both ends. The pins help both the terminals to connect with soldering them. It makes making the circuit easy and less scrambled with wires. It makes changing the circuit easy whenever it needs modification. It is used in breadboards and other tools for prototyping.

### **3.4.8 Solenoid Door Lock**

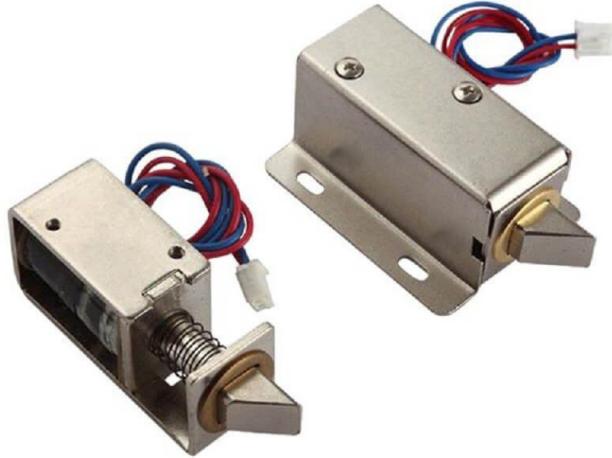


Fig: Solenoid door lock

A solenoid is basically an electromagnet, which is looped around by copper wire with a armature at the centre. An electromagnetic force is needed to order the solenoid to retract and extend, allowing the device to lock and unlock. When it gets a required voltage is acquired (normally around 9-12V), the solenoid lock retracts and hence the lock stays in open mode.

They are found in many shapes and sizes, small ones being used in doors, locks, etc to big ones being used in the industrial applications.

### **3.5: SOFTWARE REQUIREMENTS**



#### **3.5.1 OpenCV:**

OpenCV is a cross platform library which can be used for Computer Vision in real time. It is a open-source library for Artificial intelligence, Vision PC, handling pictures. It can be used for detection, recognition, classification of both human and non-human characteristics. It can be used with various other libraries like numpy, pythonis to attain different visual goals. It uses vector Space to identify pictures, designs, patterns and perform various procedures on them.

#### **3.5.2 Computer Vision**

Computer Vision is a cycle using which we are able to store, control and extract information from pictures and recordings. For most part Utilization of Artificial Intelligence Computer Vision acts as a beginning point. PC Vision is assuming a significant part in self-driving vehicles, mechanical technology as well as in photograph revision applications.

#### **3.5.3 Python (OpenCV implementation)**

Python is an undeniable level, most famous and most used programming language. Python is used by millions of users just because of its very helpful community and the functionality of supporting a vast pre defined and user defined standard libraries. The functionality of modules reduces code word subsequently as we don't have to write huge codes repeatedly and simply use these modules. Python is the most preferred

language for Machine Learning, Artificial Intelligence and analysis as it is really powerful yet simple enough to understand and that is also a major reason of its fame among the beginners. Some information about Python are:

1. It is the most used and known programming language currently in the world.
2. It supports both Object Oriented and Procedural programming.
3. Normal user can understand the codes as the codes are really simple and understandable.
4. All big companies over the world prefer it as their main working language.
5. The biggest advantages of python is the vast standard libraries which allows us to perform various machine learning, artificial intelligence, GUI based applications, test format ,etc.

## Chapter 4: EXPERIMENTS AND RESULTS

### 4.1: Model of the project:

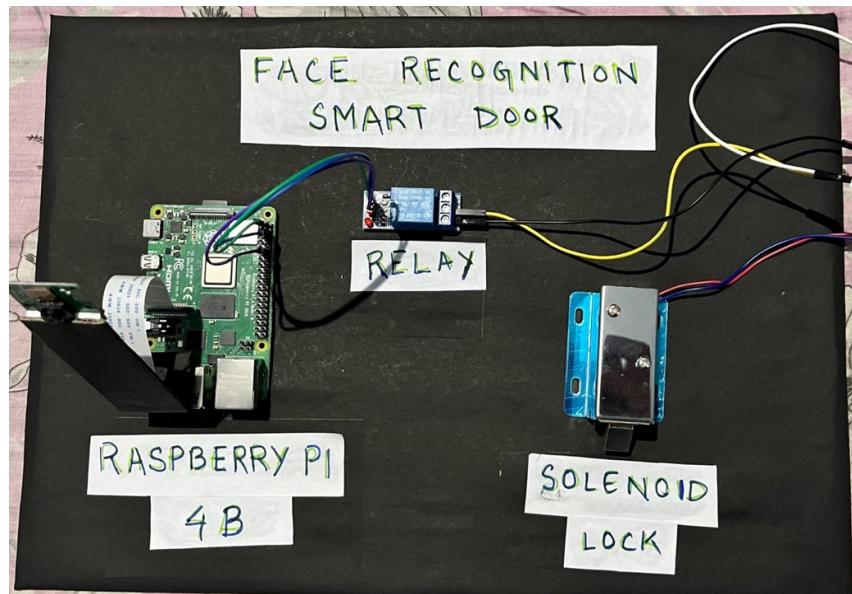


Fig: Final model of the Project

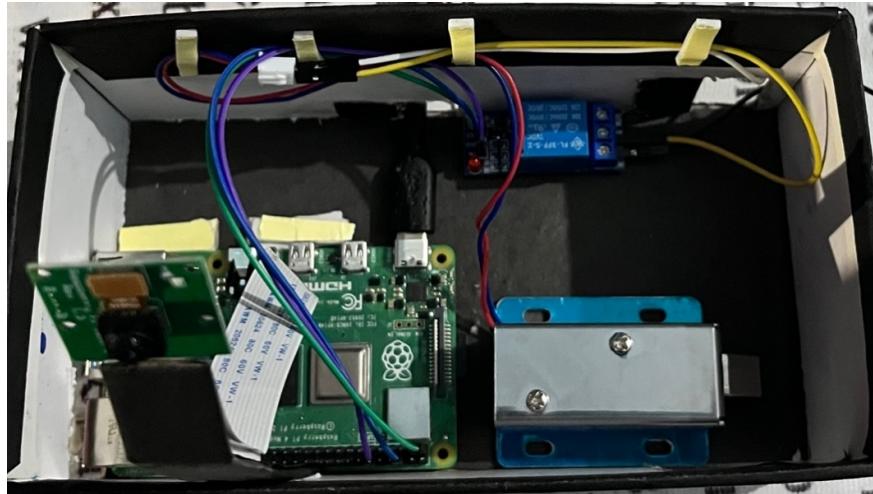


Fig: Compact model of the Project

## 4.2: Implementation:

The code has 4 important segments, one co-dependent on the other.

1: Capturing image and making dataset.

```
facial_req.py  headshots_picam.py
1 import cv2
2 from picamera import PiCamera
3 from picamera.array import PiRGBArray
4
5 name = 'new_name' #name of new entry
6
7 cam = PiCamera()
8 cam.resolution = (512, 304)
9 cam framerate = 10
10 rawCapture = PiRGBArray(cam, size=(512, 304))
11
12 img_counter = 0
13
14 while True:
15     for frame in cam.capture_continuous(rawCapture, format="bgr", use_video_port=True):
16         image = frame.array
17         cv2.imshow("Press Space to take a photo", image)
18         rawCapture.truncate(0)
19
20         k = cv2.waitKey(1)
21         rawCapture.truncate(0)
22         if k%256 == 27: # ESC pressed
23             break
24         elif k%256 == 32:
25             # SPACE pressed
26             img_name = "dataset/" + name + "/image_{}.jpg".format(img_counter)
27             cv2.imwrite(img_name, image)
28             print("{} written!".format(img_name))
29             img_counter += 1
30
31         if k%256 == 27:
32             print("Escape hit, closing...")
33             break
34
35 cv2.destroyAllWindows()
```

Fig: Registering new user.

2. Training the model with the available dataset

```
facial_req.py  headshots_picam.py  train_model.py
1 #!/usr/bin/python
2
3 # import the necessary packages
4 from imutils import paths
5 import face_recognition
6 #import argparse
7 import pickle
8 import cv2
9 import os
10
11 # our images are located in the dataset folder
12 print("[INFO] start processing faces...")
13 imagePaths = list(paths.list_images("dataset"))
14
15 # initialize the list of known encodings and known names
16 knownEncodings = []
17 knownNames = []
18
```

```

18 # loop over the image paths
19 for (i, imagePath) in enumerate(imagePaths):
20     # extract the person name from the image path
21     print("[INFO] processing image {}/{}".format(i + 1,
22         len(imagePaths)))
23     name = imagePath.split(os.path.sep)[-2]
24
25     # load the input image and convert it from RGB (OpenCV ordering)
26     # to dlib ordering (RGB)
27     image = cv2.imread(imagePath)
28     rgb = cv2.cvtColor(image, cv2.COLOR_BGR2RGB)
29
30     # detect the (x, y)-coordinates of the bounding boxes
31     # corresponding to each face in the input image
32     boxes = face_recognition.face_locations(rgb,
33         model="hog")
34
35     # compute the facial embedding for the face
36     encodings = face_recognition.face_encodings(rgb, boxes)
37
38     # loop over the encodings
39     for encoding in encodings:
40         # add each encoding + name to our set of known names and
41         # encodings
42         knownEncodings.append(encoding)
43         knownNames.append(name)
44
45     # dump the facial encodings + names to disk
46     print("[INFO] serializing encodings...")
47     data = {"encodings": knownEncodings, "names": knownNames}
48     f = open("encodings.pickle", "wb")
49     f.write(pickle.dumps(data))
50     f.close()
51
52

```

Fig: Training the model

### 3. Controlling solenoid through relay.

```

1 #Import all neccessary features to code.
2 import RPi.GPIO as GPIO
3 from time import sleep
4
5 #If code is stopped during active it will stay active
6 #This may produce a warning if restarted, this
7 #line prevents that.
8 GPIO.setwarnings(False)
9 #This means we will refer to the GPIO
10 #by the number after GPIO.
11 GPIO.setmode(GPIO.BCM)
12 #This sets up the GPIO 18 pin as an output pin
13 GPIO.setup(18, GPIO.OUT)
14
15 while (True):
16
17     #This Turns Relay Off. Brings Voltage to Max GPIO can output -3.3V
18     GPIO.output(18, 1)
19     #Wait 1 Seconds
20     sleep(1)
21     #Turns Relay On. Brings Voltage to Min GPIO can output ~0V.
22     GPIO.output(18, 0)
23     #Wait 1 Seconds
24     sleep(1)

```

Fig: Solenoid lock control

#### 4: Recognizing the registered user and opening the lock through relay

```

facial_req.py  x  headshots_picam.py  x  train_model.py  x
1  #! /usr/bin/python
2
3  # import the necessary packages
4  from imutils.video import VideoStream
5  from imutils.video import FPS
6  import face_recognition
7  import imutils
8  import pickle
9  import time
10 import cv2
11 import RPi.GPIO as GPIO
12 from time import sleep
13
14 relay = 18
15 GPIO.setwarnings(False)
16 GPIO.setmode(GPIO.BCM)
17 GPIO.setup(18, GPIO.OUT)
18
19
20
21 #Initialize 'currentname' to trigger only when a new person is identified.
22 currentname = "unknown"
23 #Determine faces from encodings.pickle file model created from train_model.py
24 encodingsP = "encodings.pickle"
25
26 # load the known faces and embeddings along with OpenCV's Haar
27 # cascade for face detection
28 print("[INFO] loading encodings + face detector...")
29 data = pickle.loads(open(encodingsP, "rb").read())
30
31 #stream the current live captures
32 vs = VideoStream(usePiCamera=True).start()
33 time.sleep(0.1)

facial_req.py  x  headshots_picam.py  x  train_model.py  x
35 # start the FPS counter
36 fps = FPS().start()
37
38 # loop over frames from the video file stream
39 while True:
40     # grab the frame from the threaded video stream and resize it
41     frame = vs.read()
42     frame = imutils.resize(frame, width=500)
43     # Detect the face boxes
44     boxes = face_recognition.face_locations(frame)
45     # compute the facial embeddings for each face bounding box
46     encodings = face_recognition.face_encodings(frame, boxes)
47     names = []
48     GPIO.output(18, 1)
49
50     # loop over the facial embeddings
51     for encoding in encodings:
52         # attempt to match each face in the input image to our known
53         # encodings
54         matches = face_recognition.compare_faces(data["encodings"],
55             encoding)
56         name = "Unknown" #if face is not recognized, then print Unknown
57
58         # check to see if we have found a match
59         if True in matches:
60             print("Unlocking")
61             #if found encoding set relay to open the lock
62             GPIO.output(18, 0)
63             #time.sleep(5)
64             # find the indexes of all matched faces then initialize a
65             # dictionary to count the total number of times each face
66             # was matched
67             matchedIdxs = [i for (i, b) in enumerate(matches) if b]
68             counts = {}

facial_req.py  x  headshots_picam.py  x  train_model.py  x
70
71     # loop over the matched indexes and maintain a count for
72     # each recognized face
73     for i in matchedIdxs:
74         name = data["names"][i]
75         counts[name] = counts.get(name, 0) + 1
76
77     # determine the recognized face with the largest number
78     # of votes (note: in the event of an unlikely tie Python
79     # will select first entry in the dictionary)
80     name = max(counts, key=counts.get)
81
82     #If someone in your dataset is identified, print their name on the screen
83     if currentname != name:
84         currentname = name
85         print(currentname)
86
87     # update the list of names
88     names.append(name)
89
90     # loop over the recognized faces
91     for ((top, right, bottom, left), name) in zip(boxes, names):
92         # draw the predicted face name on the image - color is in BGR
93         cv2.rectangle(frame, (left, top), (right, bottom),
94             (0, 255, 225), 2)
95         y = top - 15 if top - 15 > 15 else top + 15
96         cv2.putText(frame, name, (left, y), cv2.FONT_HERSHEY_SIMPLEX,
97             .8, (0, 255, 255), 2)


```

Fig: Execution


### 4.3 Result:

The system successfully identifies a registered personal, and opens the solenoid lock.

And on failure the lock remains close.

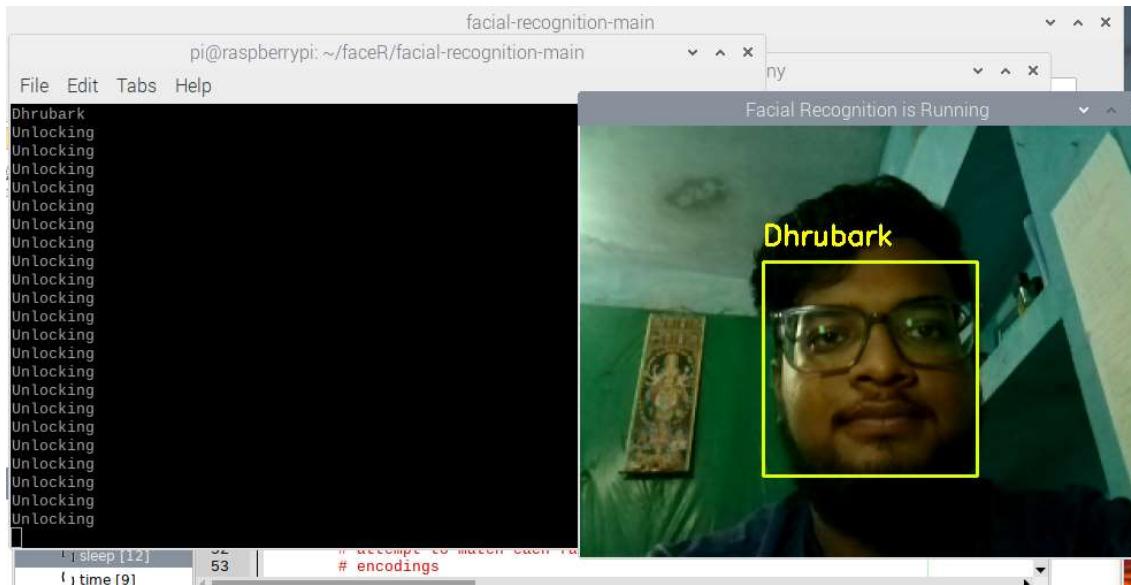

Success: Upon recognising a registered user the Door gets unlocked and the name of the person is showed on the screen.

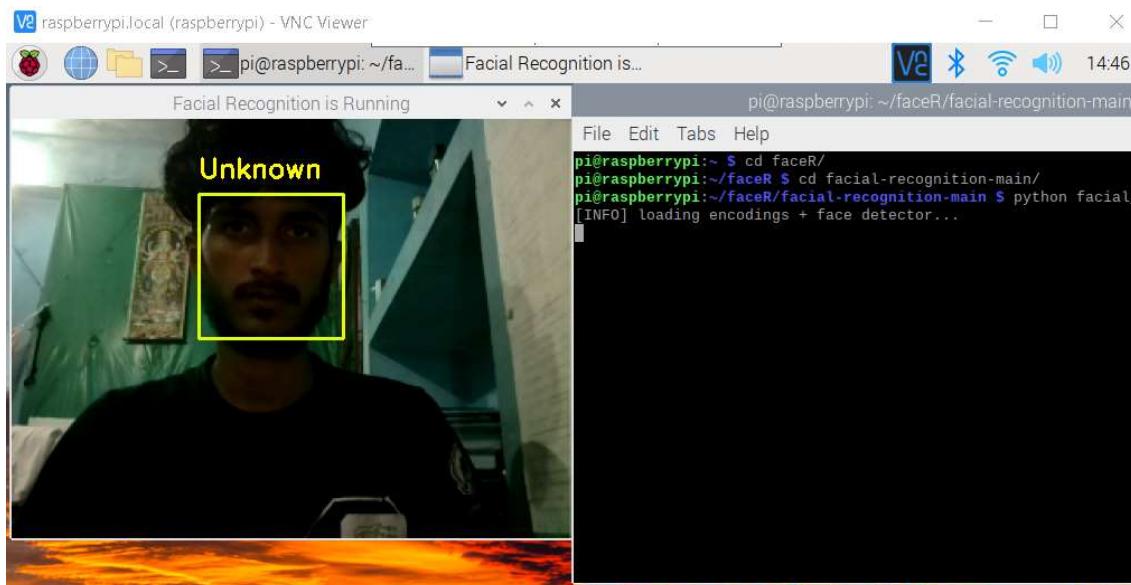

Failure: Upon not recognizing the user, the lock stays closed and “Unknown” is shown in screen.

## **Chapter 5: CONCLUSION AND FUTURE SCOPE**

We were able to recognize a registered user using OpenCv and python in raspberry pi OS (operating system). The model works almost perfectly under different lighting and camera conditions. Also, the algorithm needs ample training sets to identify an object with precision.

### **5.1 Future Scopes**

The whole system can be replaced by a instance in the cloud, while will drastically save cost of the system. Migrating the system into the cloud would give a sub sequential advantage over costly traditional system.

For an improved, powerful framework to be carried out and accomplished, the accompanying idea needs additional working.

A high quality sensor is prescribed for accomplish improve execution, upgrade precision also accomplish better usefulness.

The Raspberry pi board used is really costly and it is required for each separate unit. We can lower the cost subsequently by transferring the computation done by the board to an instance in the cloud. The instance will be able to upscale and downscale accordingly. This will in turn save us a lot of money as computation could be performed in the cloud for a bunch of units in a single instance in the cloud.

### **5.2 Limitation of the project**

The direct sunlight affects the camera sensor where in the sensor is unable to take pictures. Additionally, different factors like a chimney, wind from a system, heat from heaters also effect the functionality of the picamera. Under dark condition, picamera is unable to capture frames.

## Chapter 6: REFERENCES

1. Shetty, Anirudha B., and Jeevan Rebeiro. "Facial recognition using Haar cascade and LBP classifiers." Global Transitions Proceedings 2, no. 2 (2021): 330-335.
2. Mantoro, Teddy, and Media A. Ayu. "Multi-faces recognition process using Haar cascades and eigenface methods." In 2018 6th International Conference on Multimedia Computing and Systems (ICMCS), pp. 1-5. IEEE, 2018.
3. Y. Januzaj, A. Luma, Y. Januzaj, V. Ramaj., "Real time access control based on face recognition," in International Conference on Network security & Computer Science (ICNSCS-15), pp. 7-12, 2015.
4. M. Sahani, C. Nanda, A. K. Sahu, B. Pattnaik., "Home security system based on face recognition," 2015 Int. Conf. Circuits, Power Comput. Technol. [ICCPCT-2015], pp. 1–6, 2015.
5. G. Senthilkumar, K. Gopalakrishnan, V. S. Kumar., "Embedded image capturing system using raspberry pi system," vol. 3, No. 2, pp. 213-215, 2014.
6. M. R. Mulla., "Facial image based security system using PCA," pp. 548-553, 2015.
7. M. H. Jusoh& F. Bin Jamali, "Home security system using internet of things," 2017.
8. S. S. Liew, M. Khalil-Hani, S. Ahmad Radzi, R. Bakhteri., "Gender classification: A convolutional neural network approach," Turkish J. Electr. Eng. Comput. Sci., vol. 24, No. 3, pp. 1248-1264, 2016.
9. [https://docs.opencv.org/4.x/d2/d99/tutorial\\_js\\_face\\_detection.html](https://docs.opencv.org/4.x/d2/d99/tutorial_js_face_detection.html)
10. <https://core-electronics.com.au/guides/face-identify-raspberry-pi/>
11. <https://core-electronics.com.au/guides/solenoid-control-with-raspberry-pi-relay.html>
12. <https://towardsdatascience.com/face-detection-with-haar-cascade-727f68dafd08>
13. <https://tutorial.cytron.io/2020/11/26/face-recognition-door-lock-system-using-opencv-on-raspberry-pi/>
14. [http://www.dailymotion.com/video/x11fgbb\\_movement-sensed-automatic-door-opening-system-engineering-projects\\_tech](http://www.dailymotion.com/video/x11fgbb_movement-sensed-automatic-door-opening-system-engineering-projects_tech)
15. <http://services.eng.uts.edu.au/pmc1/de/Downloads/Lecture04.pdf>
16. <http://www.learningaboutelectronics.com/Articles/Atmega328-pinout.php>
17. <https://www.parallax.com/sites/default/files/downloads/555-28027-PIR-Sensor-Product-Guide-v2.3.pdf>
18. <https://www.digikey.in/en/maker/projects/raspberry-pi-face-recognition-based-door-lock/a4c71ade7f294a62bd8cd94a803df919>
19. <http://www.learningaboutelectronics.com/Articles/What- is-a-LM7805-voltage-regulator>
20. <https://www.geeksforgeeks.org/python-programming-language/>

# Face Recognition Based Smart Door System

## ORIGINALITY REPORT



## PRIMARY SOURCES

- |   |  |     |
|---|--|-----|
| 1 | <a href="http://www.slideshare.net">www.slideshare.net</a><br>Internet Source  | 4%  |
| 2 | Submitted to Aligarh Muslim University,<br>Aligarh<br>Student Paper  | 2%  |
| 3 | Anirudha B Shetty, Bhoomika, Deeksha,<br>Jeevan Rebeiro, Ramyashree. "Facial<br>Recognition using Haar Cascade and LBP<br>Classifiers", Global Transitions Proceedings,<br>2021<br>Publication | 1%  |
| 4 | Submitted to Kakatiya Institute of Technology<br>and Science<br>Student Paper  | 1%  |
| 5 | <a href="http://data.conferenceworld.in">data.conferenceworld.in</a><br>Internet Source  | 1%  |
| 6 | Submitted to Federal University of Technology<br>Student Paper   | <1% |
| 7 | V.K.Bupesh Raja, V. Vijaya Baskar, M.S.<br>Godwin Premi, Rahul Kavvampally, Ignatius   | <1% |

Raja. "Microcontroller Based Toxic Gases Detection and Forestallment in Automobiles", 2021 5th International Conference on Electronics, Communication and Aerospace Technology (ICECA), 2021

Publication

8

Muhammad Arif Azhari Halim, Mohd. Fairuz Iskandar Othman, Aa Zezen Zaenal Abidin, Erman Hamid et al. "Face Recognition-based Door Locking System with Two-Factor Authentication Using OpenCV", 2021 Sixth International Conference on Informatics and Computing (ICIC), 2021

Publication

<1 %

Exclude quotes      On  
Exclude bibliography      On

Exclude matches      < 6 words