




Project:			
Serial No.:		Brand:	Richford
Product Model:	R686	Place of Origin:	PRC
Product Description:	Universal Trap Closed Coupled Toilet (P-Trap) 3/4.7 Dual Flush Tank Fitting		
Color:	White	Size:	640 x 380 x 790mm

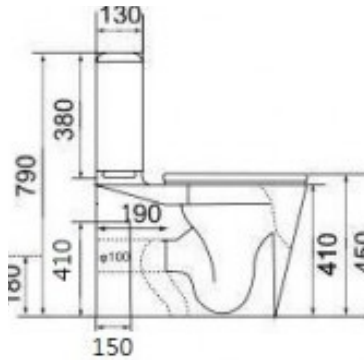


R&T

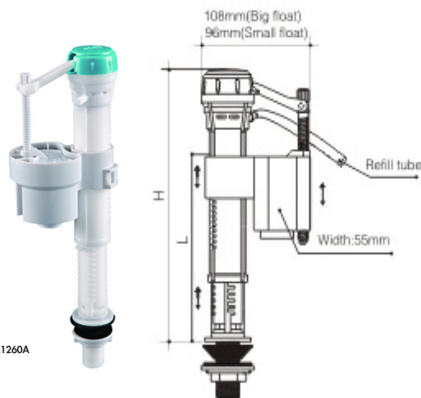

A1260A

A2415

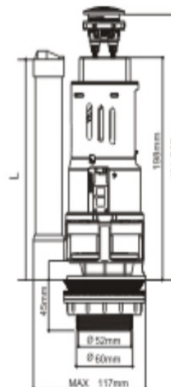

AG49401



Construction Material
建築物料

Note: All recommended installation dimension are for reference only



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (4) in WSD 3321/2023 T/J(137/2023)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

13 April 2023

Xiamen R&T Plumbing Technology Co., Ltd.

Local Correspondence Address:

15th Floor, Grandion Plaza,
932 Cheung Sha Wan Road,
Lai Chi Kok, Kowloon,
Hong Kong

Dear Sir/Madam,

**Approval of "R&T" Flush Valve
(General Acceptance No. C20230236F)**

Your letters dated 14 February 2023 and 13 March 2023 refer.

Having considered the test report ref. 225444PC220505A issued on 10 March 2023 by Fugro Technical Services Limited, this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Xiamen R&T Plumbing Technology Co Ltd

Country of Origin: the Mainland of China

Brand: R&T

Details of Fitting: 2" Plastic dual flush valve

Model: A2415

Body Markings: **R&T** A2415

Expiry Date: 7 February 2028



Proviso:

As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND

"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Ms Winnie LO at tel. no. 3583 4086.

Yours faithfully,



(YAU Hau Yin)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only



自願參與用水效益標籤計劃 - 水廁
Voluntary Water Efficiency Labelling Scheme - Water Closets

Certificate of 註冊證書
Registration

茲證明

This is to certify that

Richford Group Limited

將下列水廁在本計劃內註冊：

has registered the following water closet under this scheme :

牌 子 / Brand	:	Richford + R&T
型 號 / Model	:	R686 + R686C + A2415
種 類 / Category	:	Close-coupled Suite
原 產 地 / Country or Region Origin	:	China (WC Pan, Cistern & Flushing Valve)

在用水效益標籤上展示的標誌
Symbolic Presentation on the Water Efficiency Label :  滴水點 *Water droplet(s)*

用水效益級別
Water Efficiency Grade : 1

全沖水量
Water Flush Volume (Full) : 4.8 公升/沖廁 *litres/flush*

低沖水量
Water Flush Volume (Reduced) : 3.1 公升/沖廁 *litres/flush*

簽發日期:
Date of Issue: 10 March 2023



水 務 署
Water Supplies Department



水務署署長(林麗恒代行)
for Director of Water Supplies

+ 上述水廁具額外節水功能，即：重用洗盥水作沖廁用途。
The above water closet is equipped with additional water saving feature, that is: re-use the water collected from wash basin for flushing purpose.



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (4) in WSD 3321/19 T/J(1068/2019)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

13 December 2019

Xiamen R&T Plumbing Technology Co Ltd
Local Correspondence Address:
15th Floor, Grandion Plaza,
932 Cheung Sha Wan Road,
Lai Chi Kok, Kowloon,
Hong Kong

Dear Sir/Madam,

**Approval of “R&T” Float Operated Valve
(General Acceptance No. C20190602F)**

Your letters dated 4 November 2019 and 23 November 2019 refer.

Having considered the test report ref. BC-SUMMARY-2019-66 issued on 17 October 2019 by Castco Testing Centre Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Xiamen R&T Plumbing Technology Co Ltd

Country of Origin: the Mainland of China

Brand: R&T

Details of Fitting: 1/2" Plastic float operated valve

Model: A1260A

Body Markings: R&T A1260A

Expiry Date: 15 October 2024



Proviso: As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND

"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only

用水效益標籤
Water Efficiency Label



用水效益級別
Water Efficiency Grade **1**

水點愈少，用水效益愈高。
The fewer droplets, the more water efficient.

牌子
Brand Richford + R&T

型號
Model R686 + R686C + A2415

種類
Type Close-coupled Suite

全沖水量 (公升/沖廁)
Water Flush Volume (Full) (litres/flush) 4.8

低沖水量 (公升/沖廁)
Water Flush Volume (Reduced) (litres/flush) 3.1

登記號碼
Registration No. WC 23-0011



水務署
Water Supplies Department

如需詳細資料，請登入 www.wsd.gov.hk 或致電 2824 5000
For more information, please refer to www.wsd.gov.hk or call 2824 5000