

NOTES

Print pgs 7-12 at 100% scale. Use a sturdy fabric without stretch, like a cotton duck or canvas.

½ yard of 44" fabric (or 12" of 60" fabric) is needed per carrier. Other materials needed are listed on pg 7.



The pattern is written for zig-zagging or serging along the edges of the straps.

If you prefer, you may carefully melt the edges instead to prevent fraying.

The instructions have photos to illustrate steps; refer to these diagrams for specific placement of Velcro pieces and straps.

Both Inner Pocket pieces:


Front Outer Pocket piece:

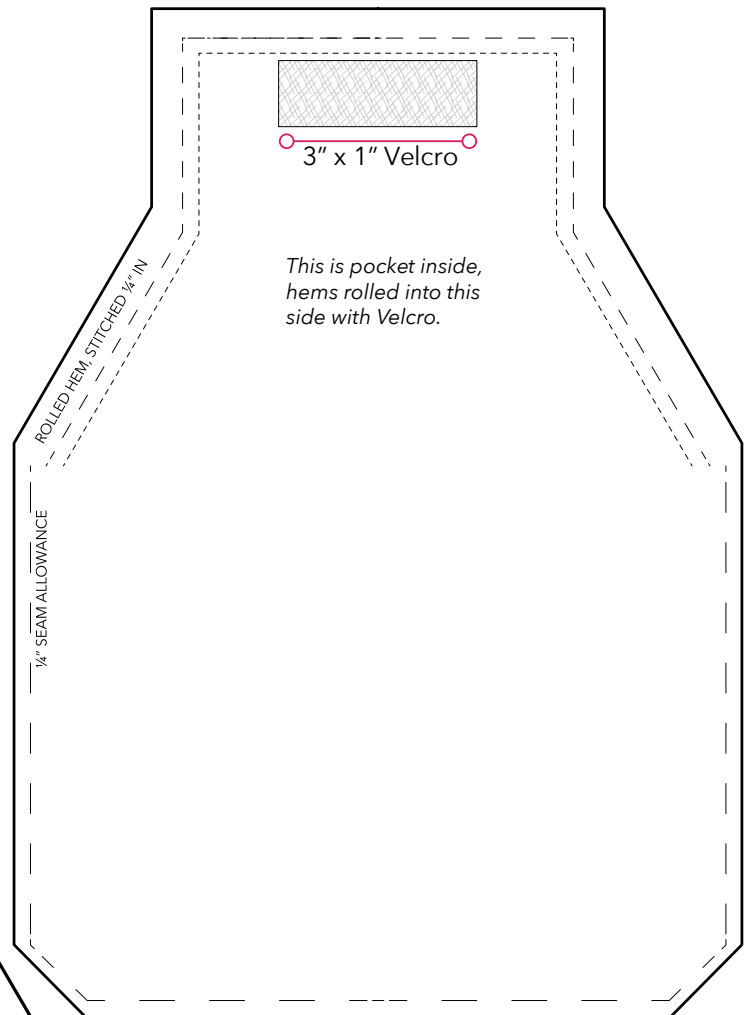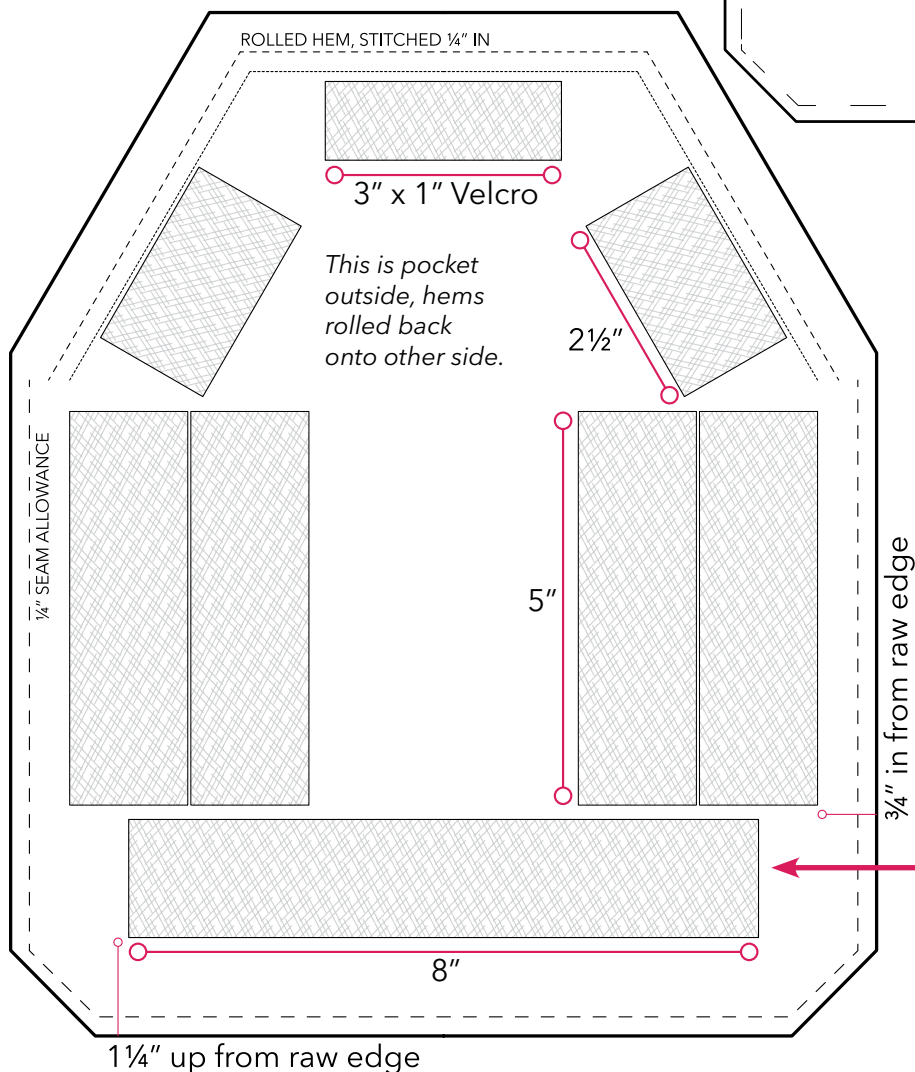


Both diagrams on this page show where all stitching will be and where Velcro will be, but you should hem the top/diagonal edges first, then add Velcro after, as in instructions.

Velcro hard (hook) side

**Back Outer Pocket
piece, before joining:**

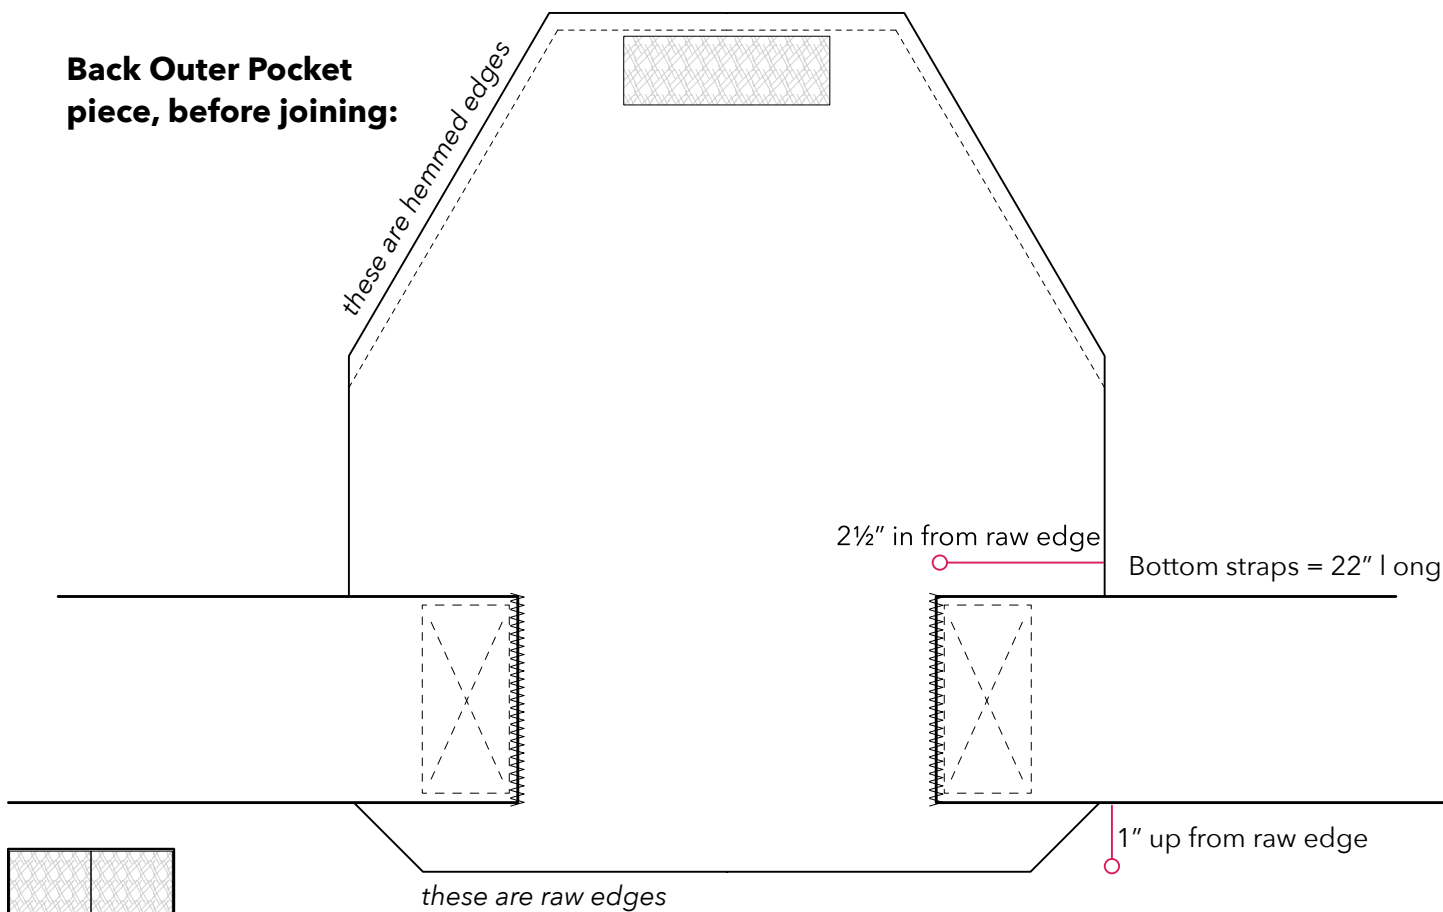

**Back Outer Pocket
piece, after joining:**

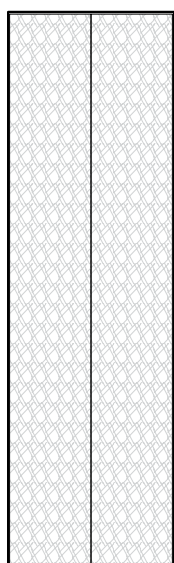


On Top (20") straps:
Velcro (soft/loop side)
covers 8" (or 6-7")

On bottom
(22") straps:
Velcro (soft/loop
side) covers 10"

On **one** bottom
strap only:
Velcro (hard/hook)
is also on other side
10", directly on other
side from soft Velcro

this side is
sewn to
pocket piece

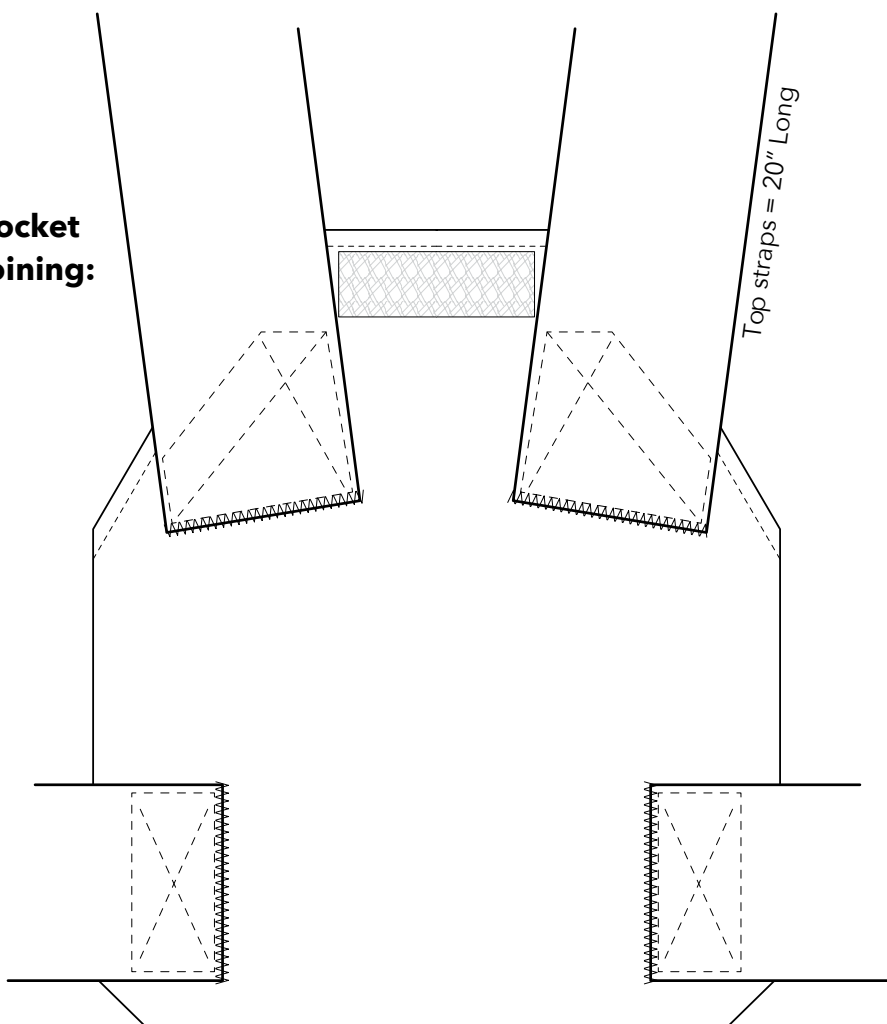

INSTRUCTIONS

BOTH OUTER POCKET PIECES

Fold down and press hem edges $\frac{1}{4}$ " then again $\frac{1}{4}$ " for rolled hems:

first the diagonal edges

then the top edges. Sew hems down.

BOTH INNER POCKET PIECES

Cut small clips (slightly less than $\frac{1}{4}$ ") where the diagonal edge turns straight.

Repeat steps for the outer pockets, curving at the clip.

Now all four pocket pieces have hemmed top edges.



SEW VELCRO TO TOPS OF ALL PIECES


Sew the 3" x 1" Velcro pieces to the tops of all pieces: the soft (loop) side to the insides of the Inner Pieces (with the top flaps) and the hard (hook) side to the outsides of the outer Pieces (no flaps). Center the Velcro and sew on just below the hem stitching.

ATTACH BOTTOM STRAPS TO OUTER BACK PIECE

To Outer Back Pocket Piece, place 22" bottom strap as shown on diagram and sew on, making a rectangle then an X through it so it's securely attached. Repeat on other side so both bottom straps are attached.

ATTACH VELCRO TO OUTER FRONT PIECE

Follow diagram to sew on the two 2.5", four 5", and one 8" pieces of Velcro (hook) to the Front Outer Pocket Piece. Sew around edges and make diagonal lines through all Velcro rectangles for strength.

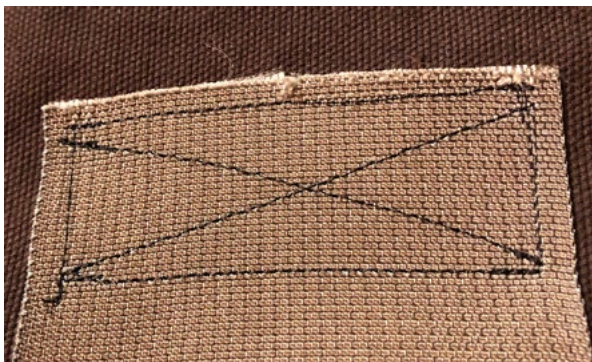

SEAM POCKETS


Join the two sets of Front and Back Pockets together, around the sides and bottom, with a 1/4" seam allowance.

Roll up the attached Back

Pocket straps inside the pocket to sew around, and be careful not to catch the strap material in the seam.

Finish around the seams with zig-zag stitch or a serged edge to prevent fraying.



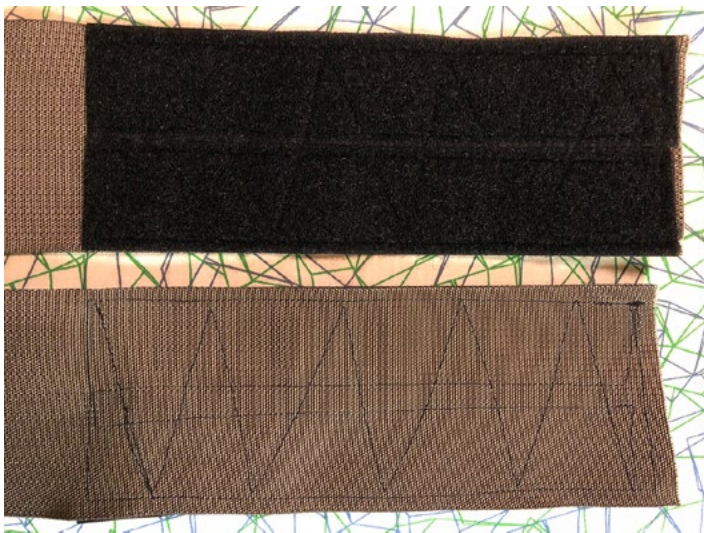

SEW VELCRO ONTO ALL STRAPS

Sew the soft (loop) Velcro onto all four straps: the 10" Velcro onto the 22" bottom straps (which are already joined to the pocket) and the 8" (or 6-7" if you're shortening the Velcro a little) to the unattached 20" top straps. On all four, line up the Velcro with the edge of the strap and along the sides. Velcro goes on the same side of the strap that's touching the pocket fabric. Sew around all edges and add some diagonal lines across for extra strength.



On one bottom strap only, also sew on strips of the hard side of Velcro onto the other side, in the same place as the soft Velcro but on the other side. You can just sew around the edges of the one side, then add the other side, go around the edges again (through all layers), then diagonal lines through all layers at once.


SEW TOP STRAPS ON BACK OUTER POCKET

Pin the straps on for placement as shown in the diagram, at a slight angle. Sew them down, sewing alongside the hemmed edge, across in a horizontal line underneath the Velcro, and along the side and bottom edges, as shown in the diagram and photo, then make an X for extra strength.



DEAL WITH STRAP EDGES

For nylon straps like these, if you did not melt the edges after cutting them, zig-zag stitch back and forth a couple of times to prevent fraying, going over the edges through the fabric on the sides attached to the pocket, and across the edge and into the Velcro edge a little on the free end.

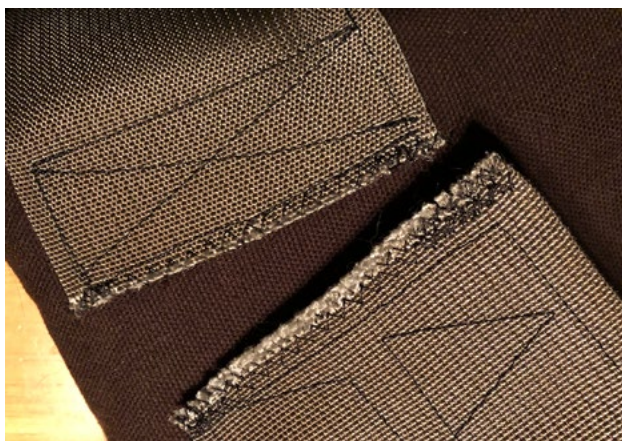

That's it! All done!

FINISHED PHOTOS


FRONT POCKET:



BACK POCKET:



BOTH POCKETS JOINED:

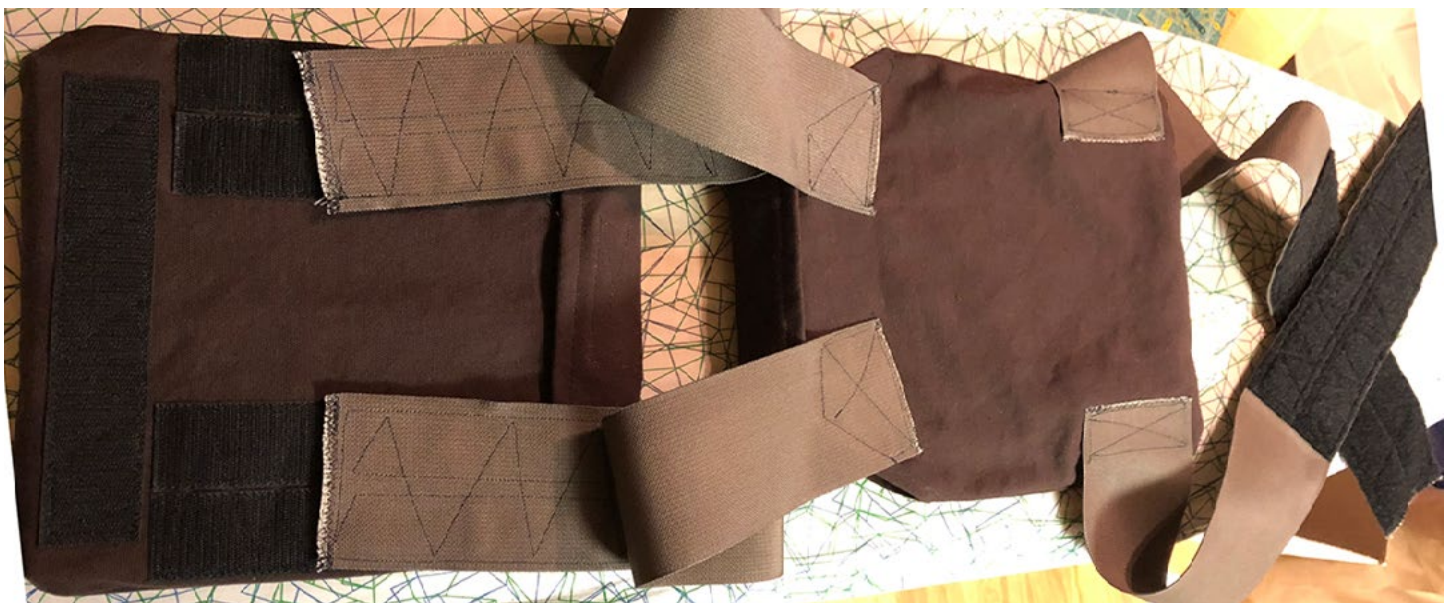

YOU'LL ALSO NEED

1½" wide sew-on Velcro:

78" of **soft side (loop)** of Velcro, cut to:

two 3", trimmed to 1" wide

four 10"

four 8" (these can be 7" or 6" if needed)

59" of **hard side (hook)** of Velcro, cut to:

two 3", trimmed to 1" wide

one 8"

two 2.5"

two 10"



four 5"


84" (2½ yards) long 3" wide strap material:

two cut to 20" long (top/shoulder)


two cut to 22" long (bottom/waist)

If working with different materials, you'll want to cover straps with Velcro in places so Velcro should either be half the width of strap, or the same width, in which case lengths needed will differ. See diagrams and photos and make changes based on your materials as needed.

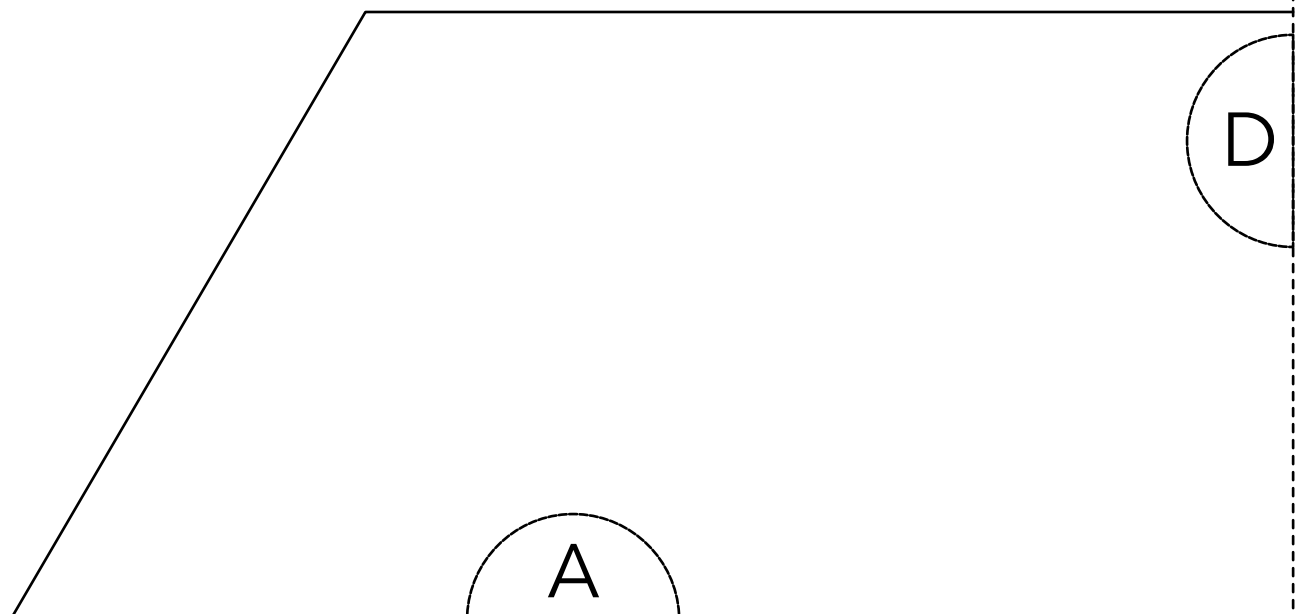
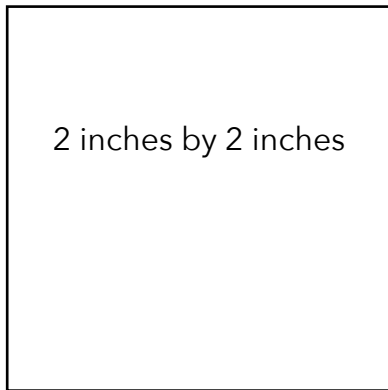


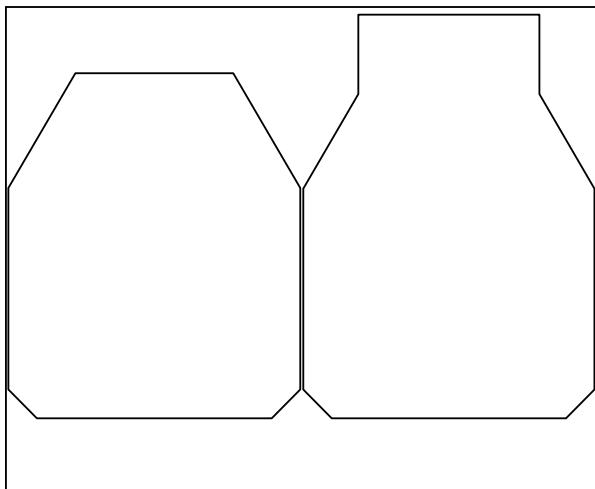



Cutting Fabric: $\frac{1}{2}$ yard of 44" fabric, folded in half

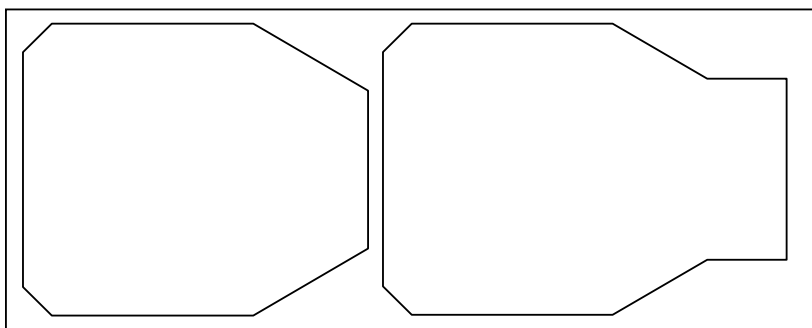

OR: 12" of 60" fabric, folded in half



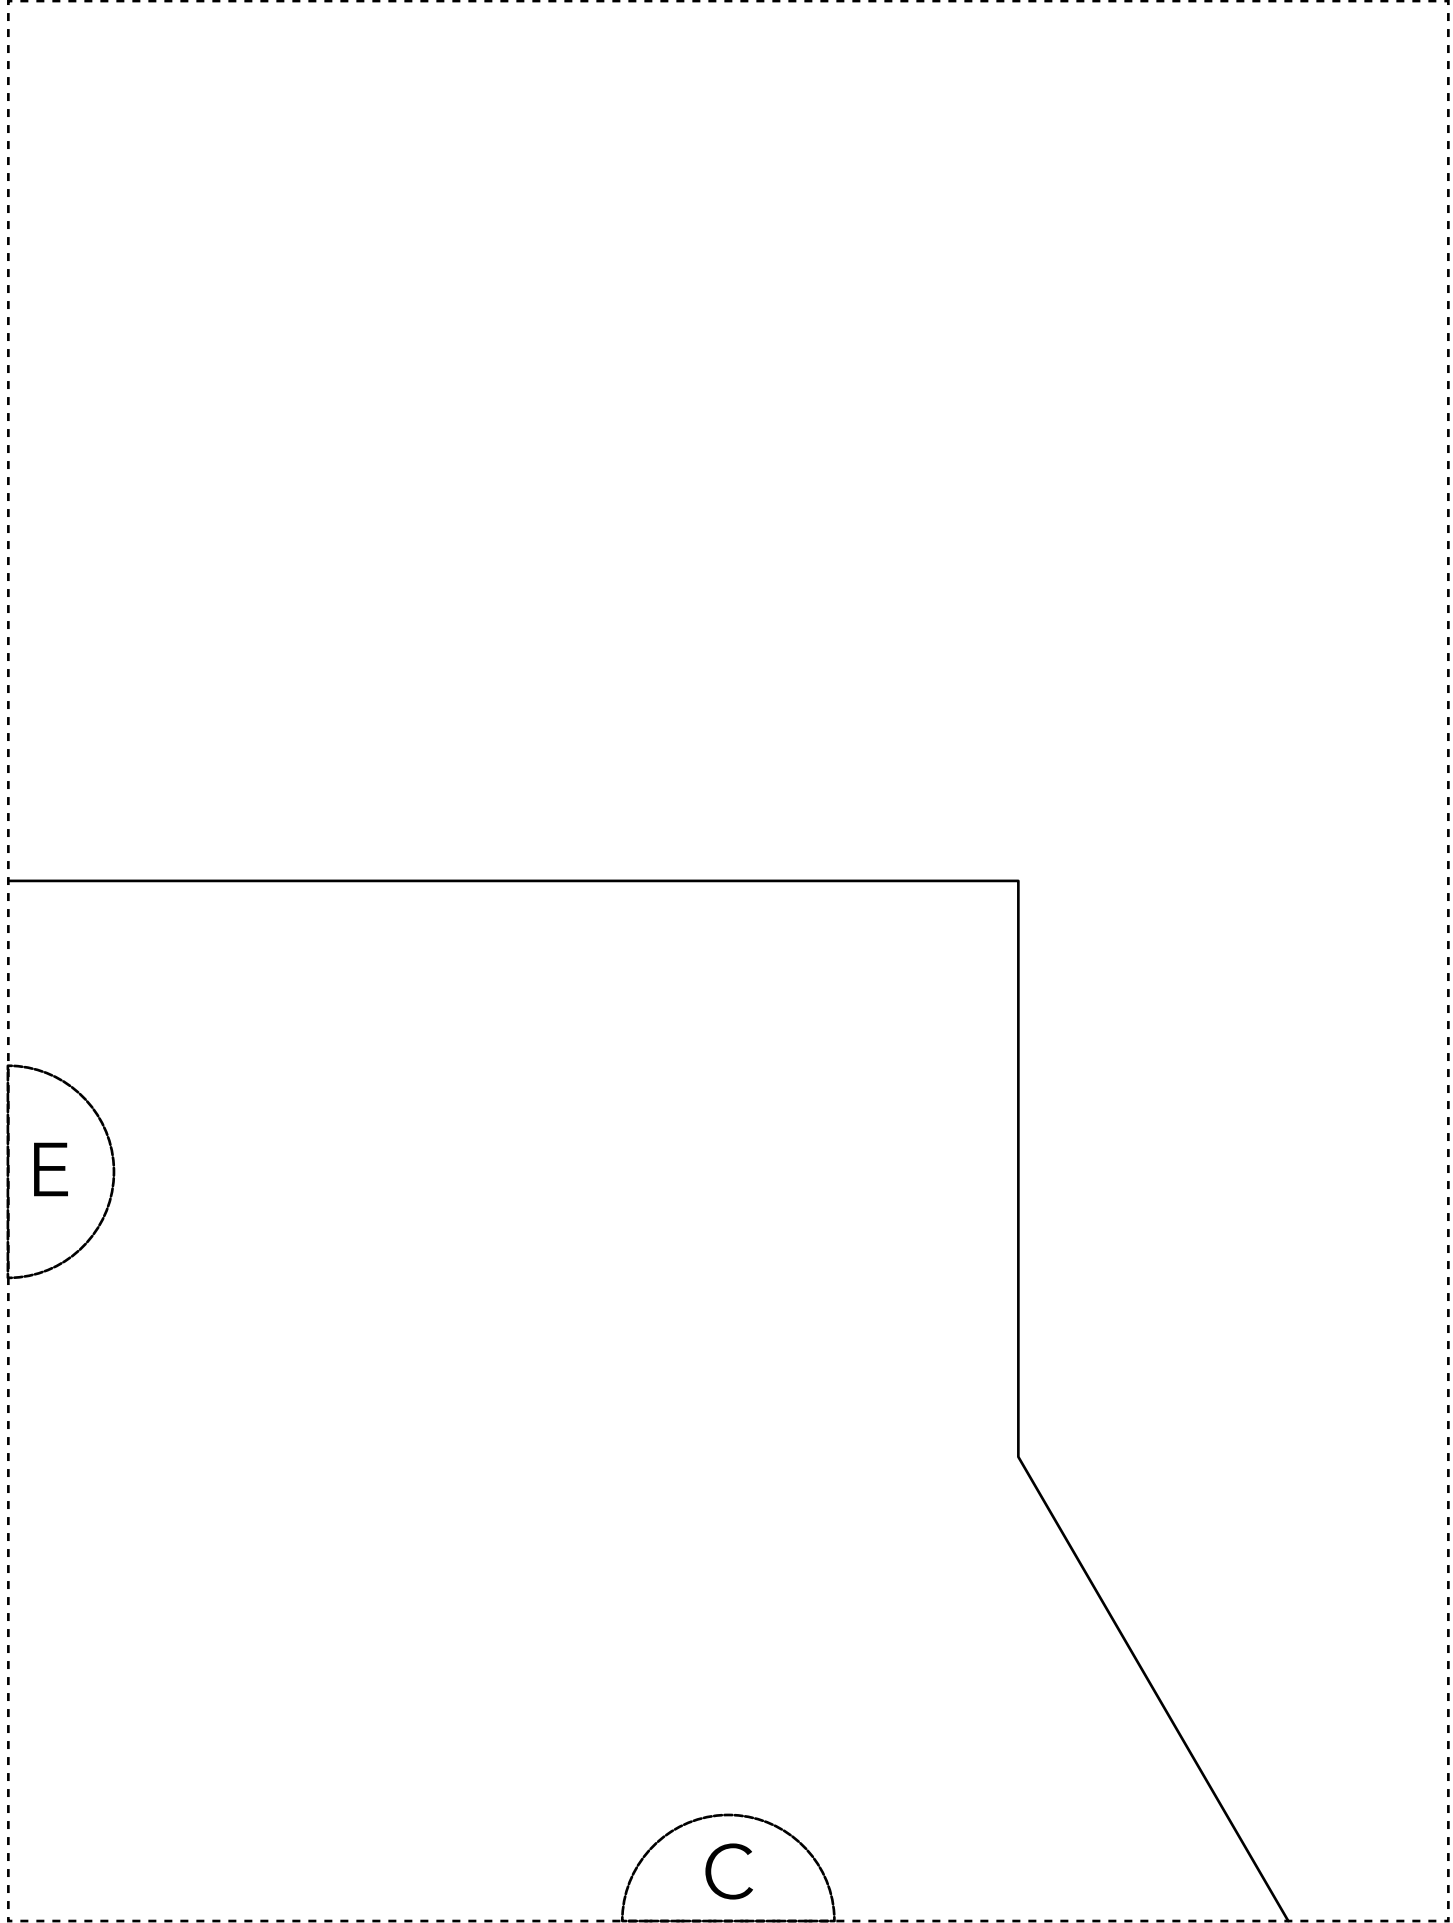

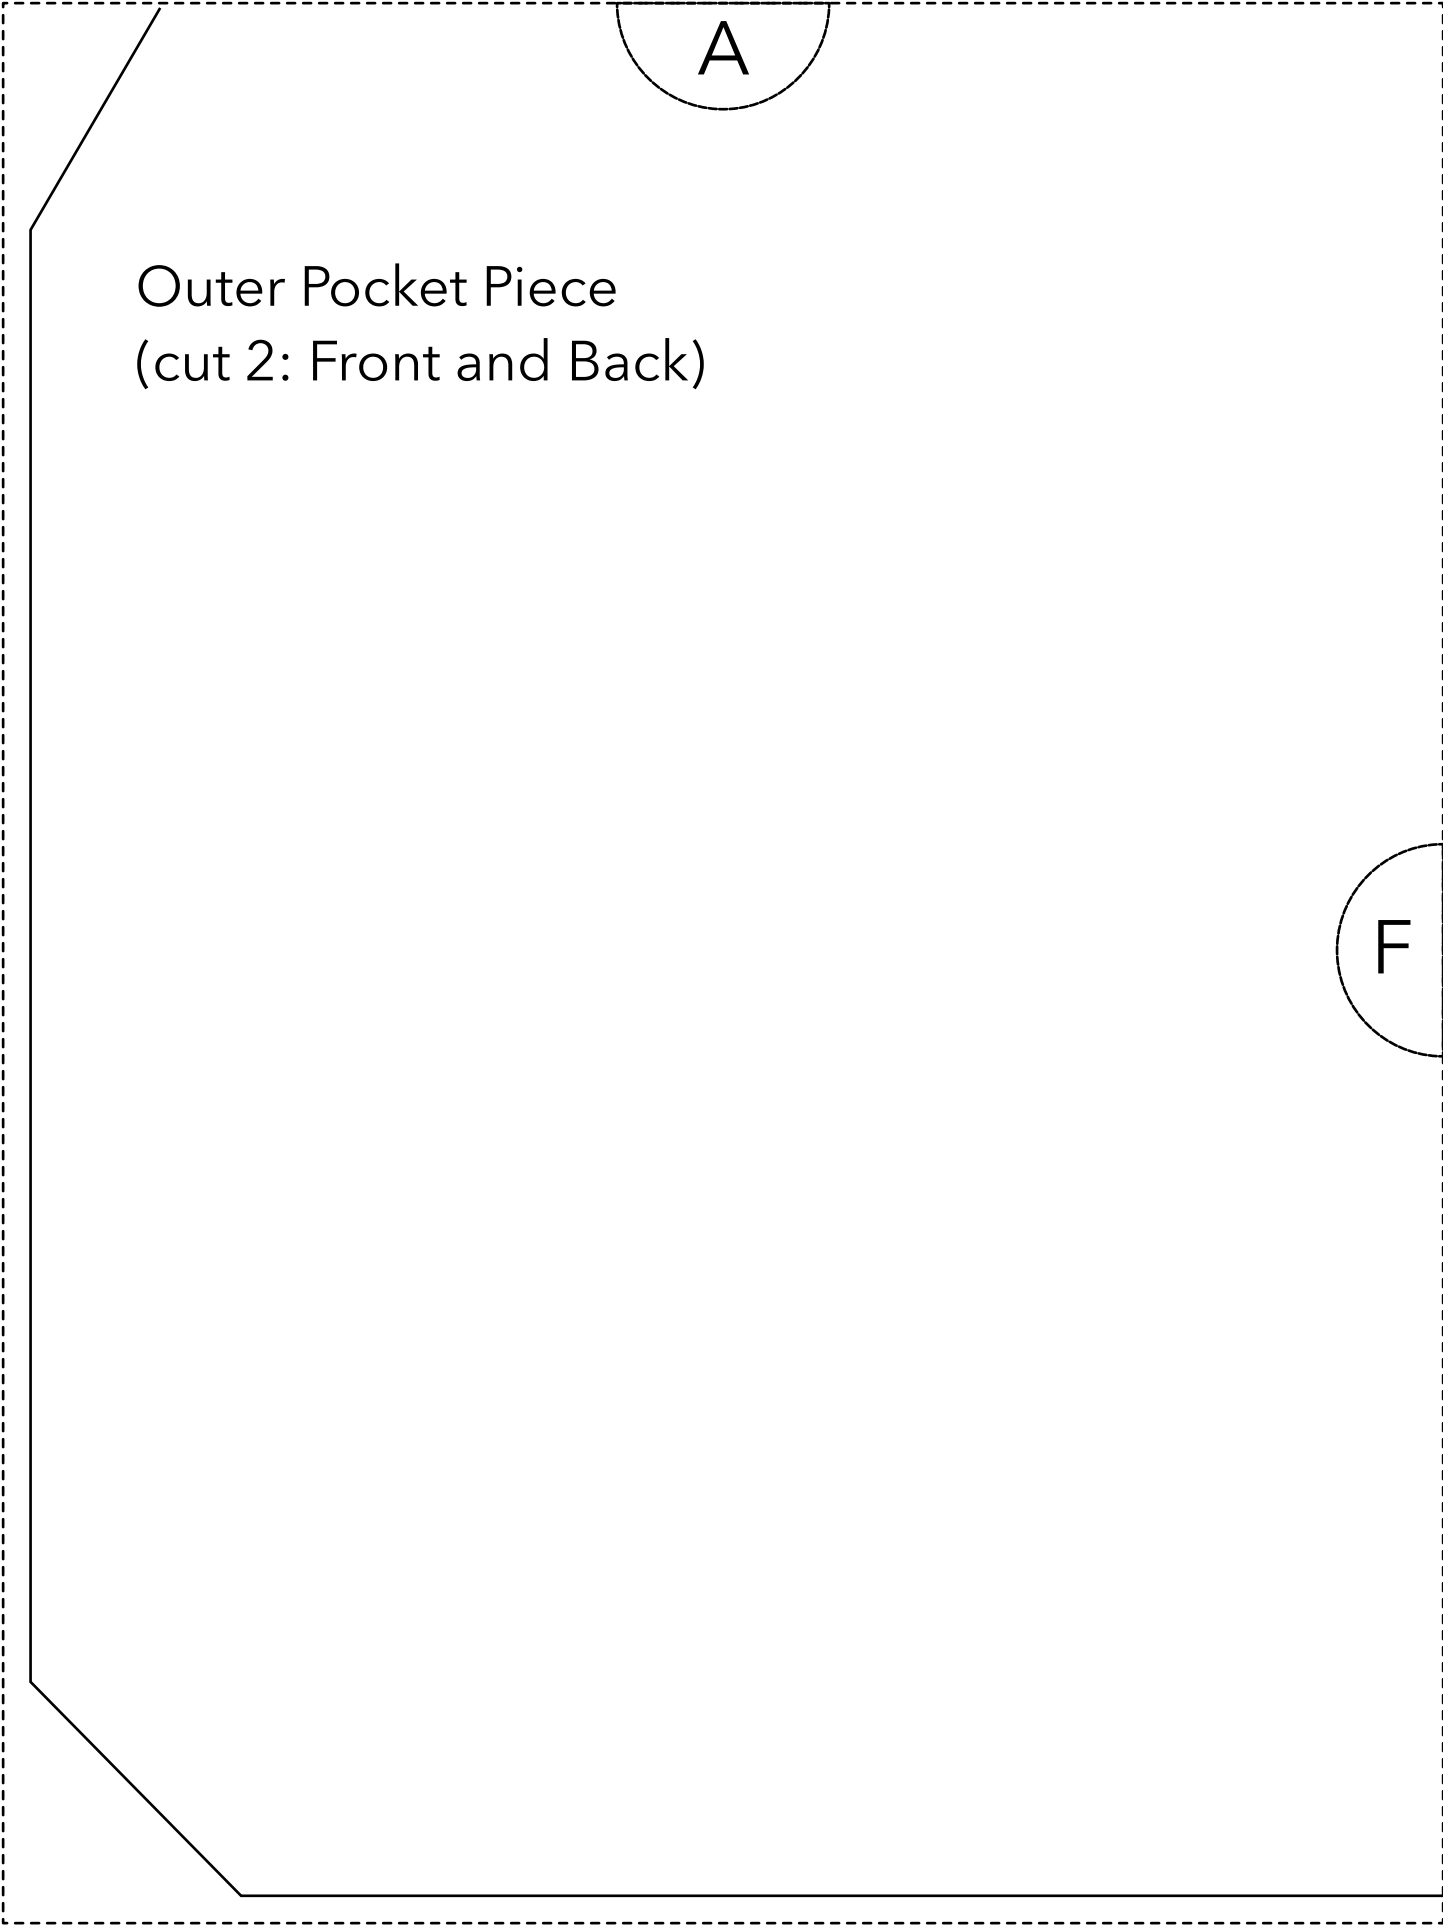



A

The diagram shows a rectangular pattern piece for an outer pocket. It features a solid black outline with a dashed border. The top-left and bottom-left corners are clipped at a 45-degree angle. A semi-circular notch labeled 'A' is centered on the top edge. A semi-circular tab labeled 'F' is centered on the right edge. The text 'Outer Pocket Piece (cut 2: Front and Back)' is located in the upper-left area of the piece.

Outer Pocket Piece
(cut 2: Front and Back)

F

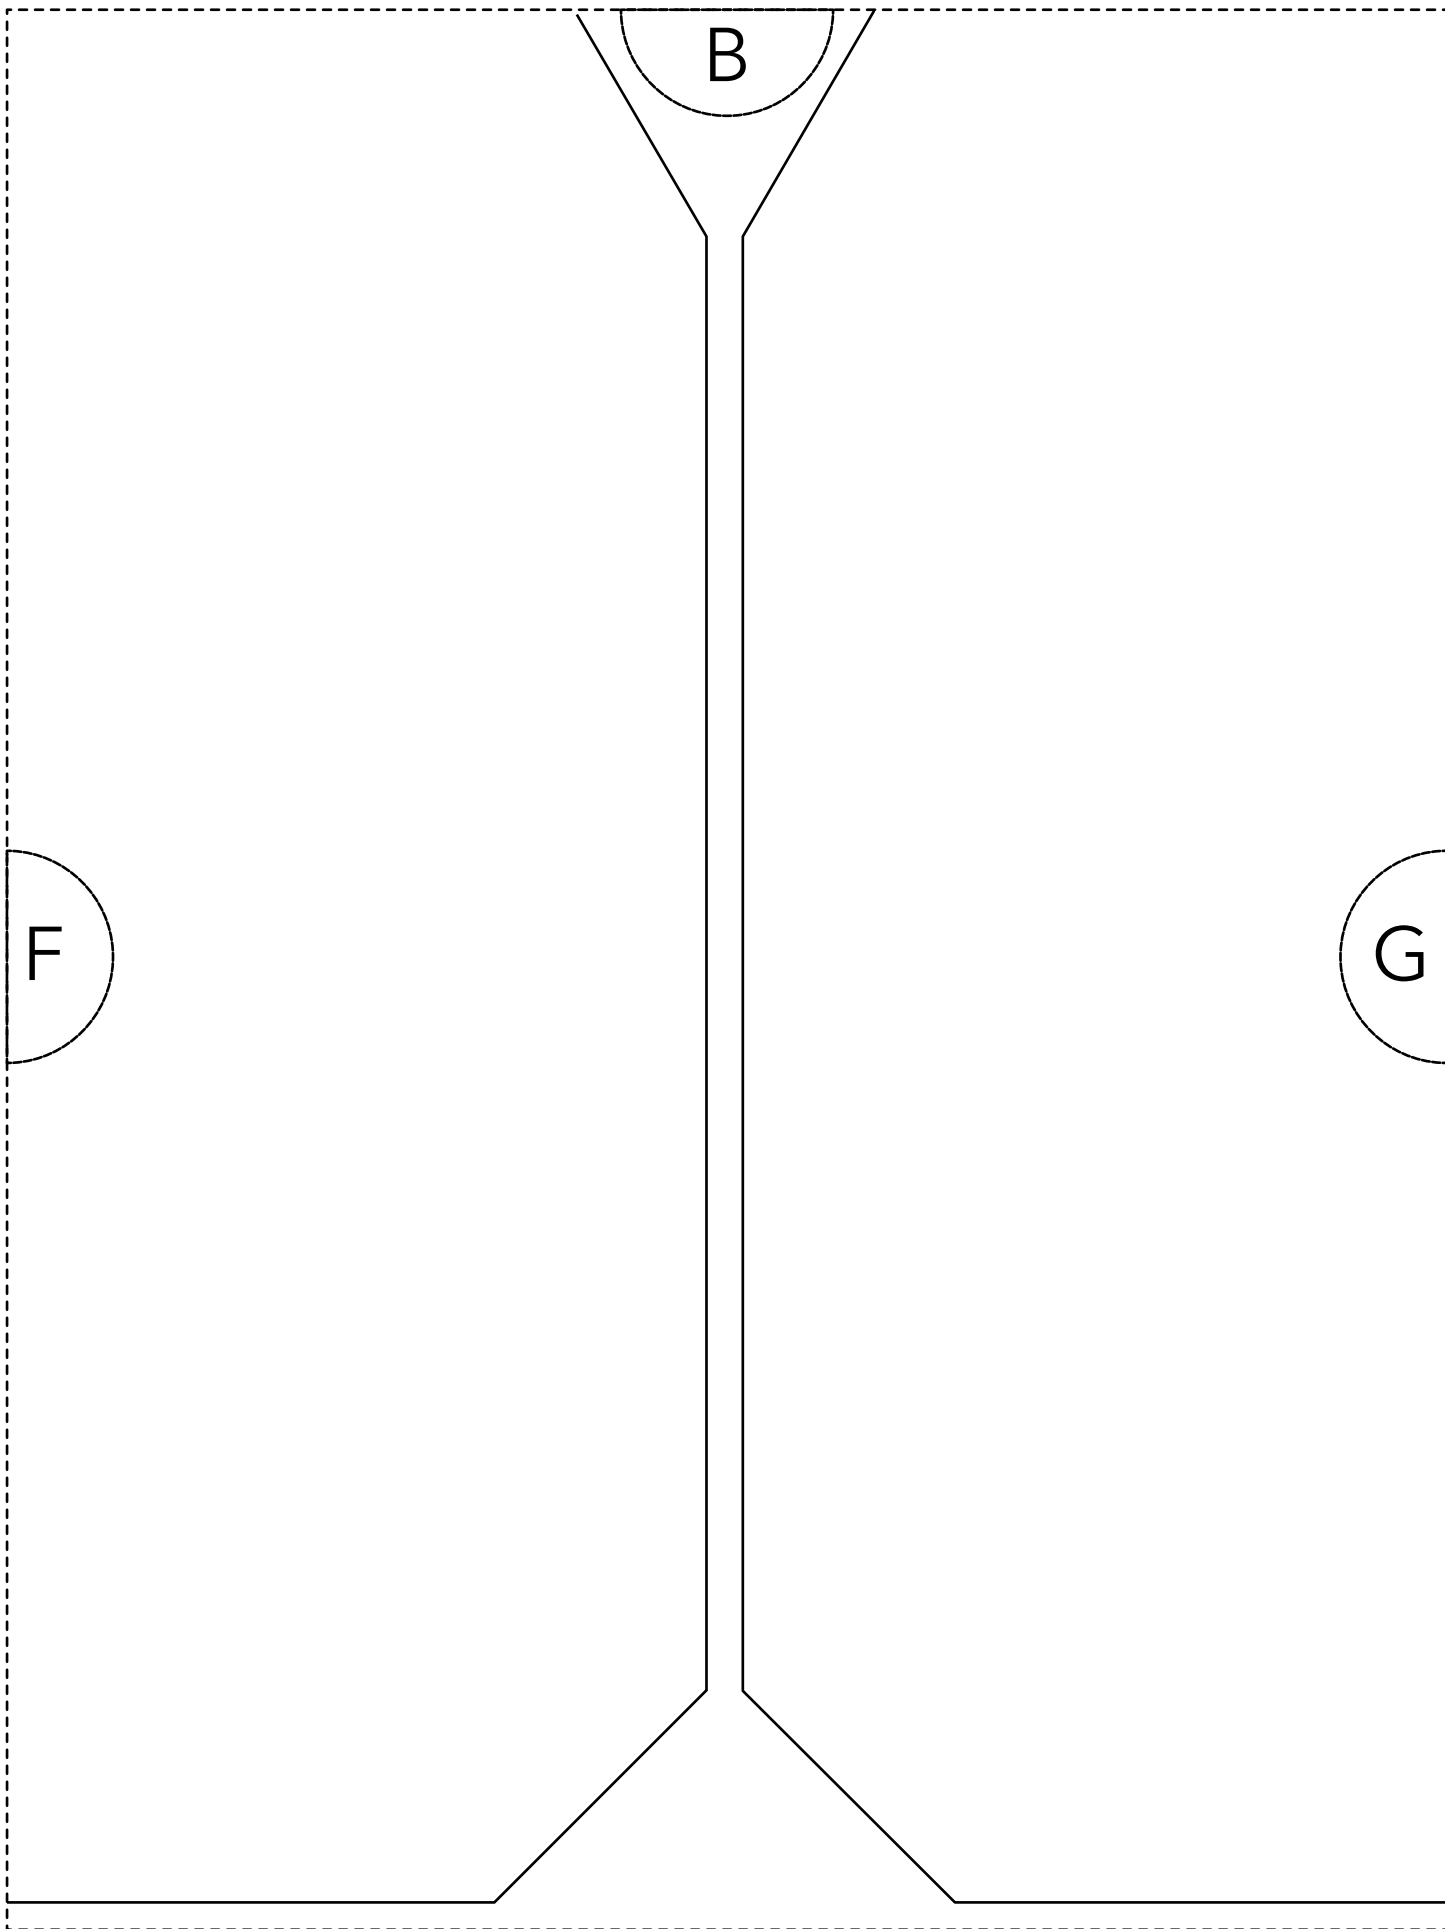



Inner Pocket Piece
(cut 2: Front and Back)

