


Two-dimensional verdict reading of the cylinder-flow pilots

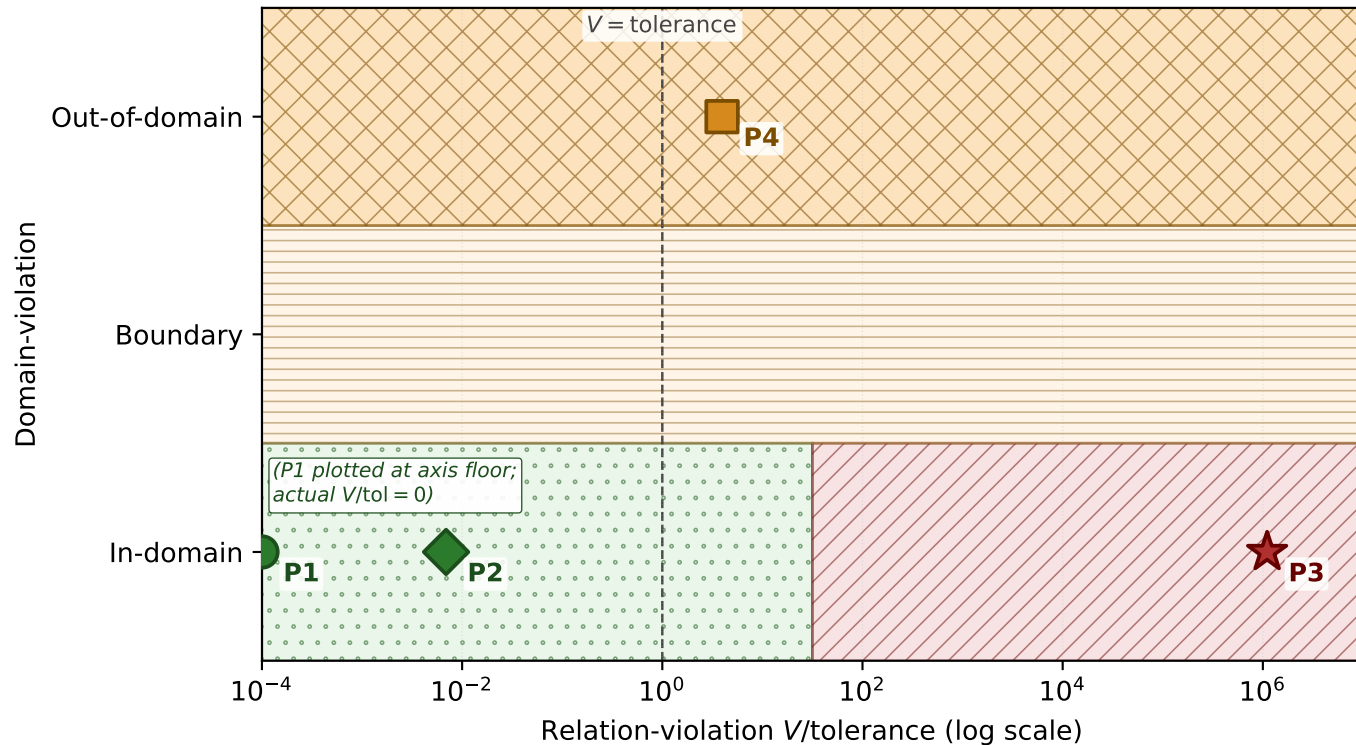

Verdict regions

- pass ($V < \text{tol.}$, In-domain)
- SUT inconsistency ($V \geq \text{tol.}$, In-domain)
- boundary (Boundary row)
- OOD-stress / out-of-domain (Out row)

Pilots in verdict space (medians from real ledgers)

- P1**: Node-perm.\ equivariance structurally exact ($V \equiv 0$)
- P2**: Conservation (ref.-relative) ratio = 1.003, within tol.\ budget
- P3**: Mirror-y on symmetric mesh $V = 1.10$, $\text{tol} = 10^{-6}$
- P4**: Mirror-y OOD-stress (downgraded) $V/\text{floor} = 3.96$ (floor as eff.\ tol.)

○ Off-plane: P5 Conservation (absolute, deferred) -- admissibility predicate fails: $\text{tol.} \leq \text{operator floor}$; not admitted to the verdict space (Sec.~3.2).