



SERIES316

Swivel castor, Ø 75 mm

Article No.: 2.HGA0.E010

Single wheel swivel castor, Housing made of steel (blue zinc-coated), swivel bearing with double ball bearing, colour: blue zinc-coated

Locking device with total lock

Wheel with ball bearing and non-marking grey thermoplastic tyres (TPE) with thread guard

Connection via bolt hole M10mm



Special functions: cleaning by wipe disinfection possible without restrictions

Further information of this product are available on the Internet at www.steinco.com/shop/316/2.HGA0.E010



Image similar to the original

Mounting height (mm)	97	Load Capacity (dynamic)	60 kg
Offset (mm)	30	Load Capacity (static)	180 kg
Swivel radius (mm)	83	Temperature Range	from -10 °C to 40 °C
Locking device	Total lock	Compliance	RoHS, REACH
Wheel Ø (mm)	75	Standards	DIN EN 12530
Wheel width (mm)	23		
Wheel hardness	90 shore A		
Fork colour	blue zinc-coated		
Colour of wheel hub/cover	RAL 7004 - Signal grey		
Attachment	Bolt hole		
Fitting dimension	Bolt hole M10mm		
Weight	333 g		

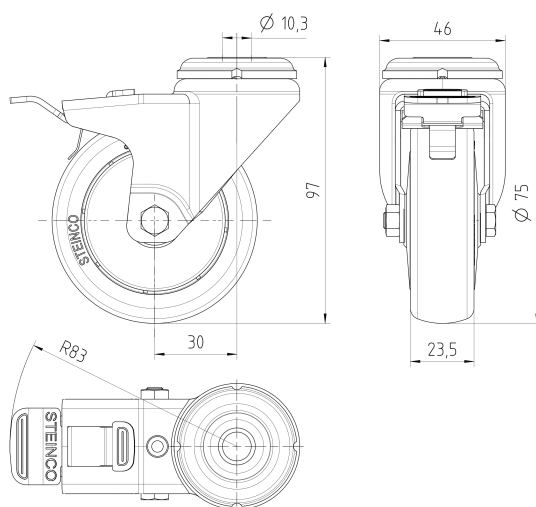

Copyright by STEINCO Paul vom Stein GmbH_2020 ©

Copyright by STEINCO Paul vom Stein GmbH_2020 ©