

Systems Integration

CSI Host Driver for PXC Modular

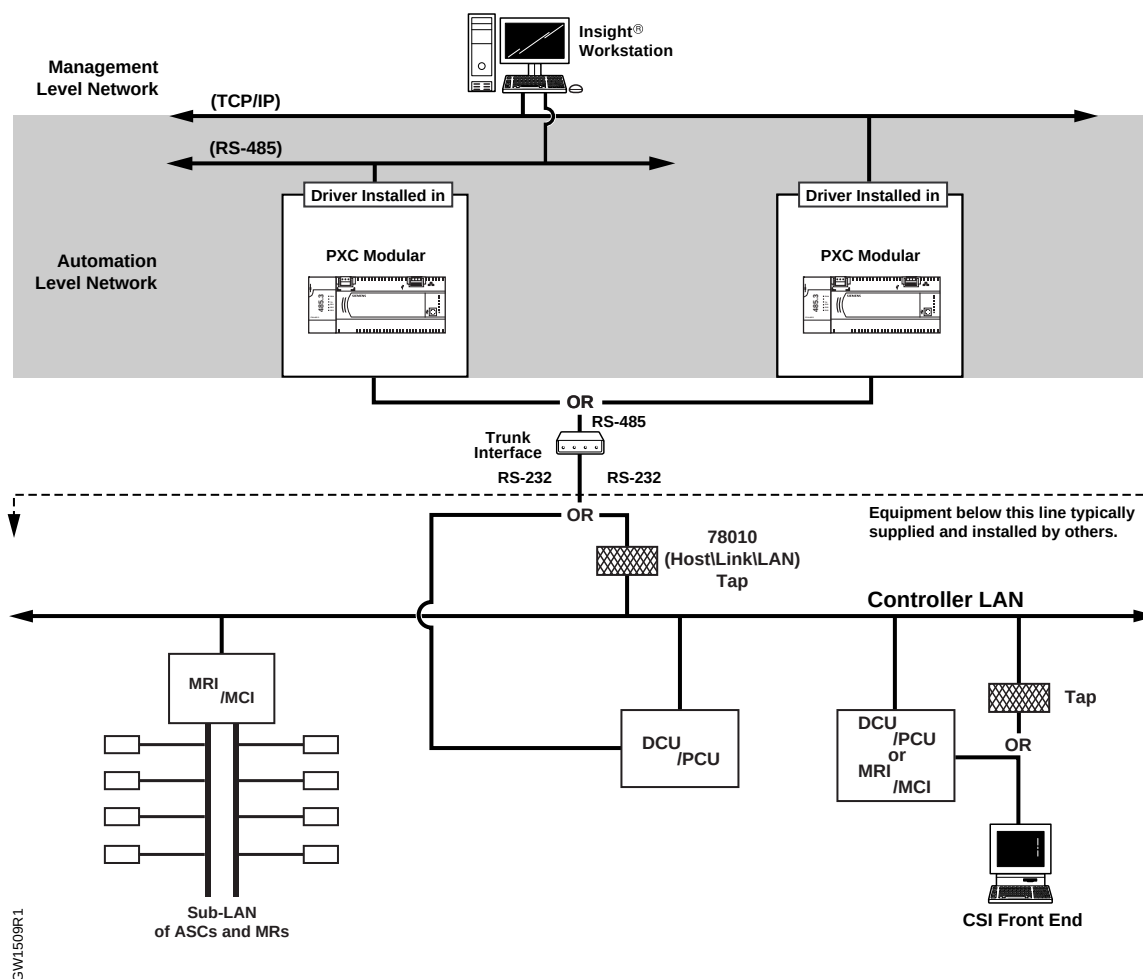


Figure 1. Typical System Architecture — Recommended (Firmware Revision 2.x).

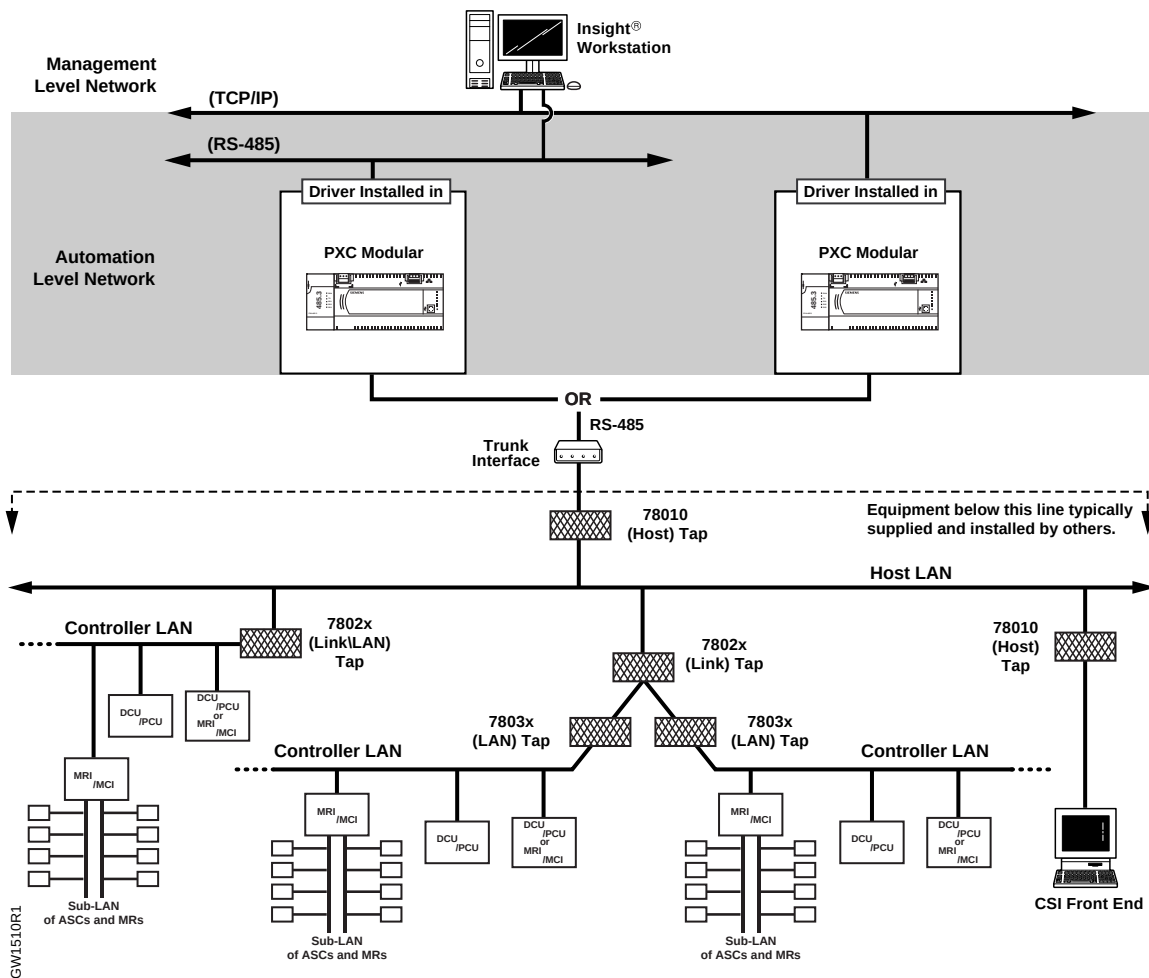


Figure 2. Alternate System Architecture (Firmware Revision 2.x).

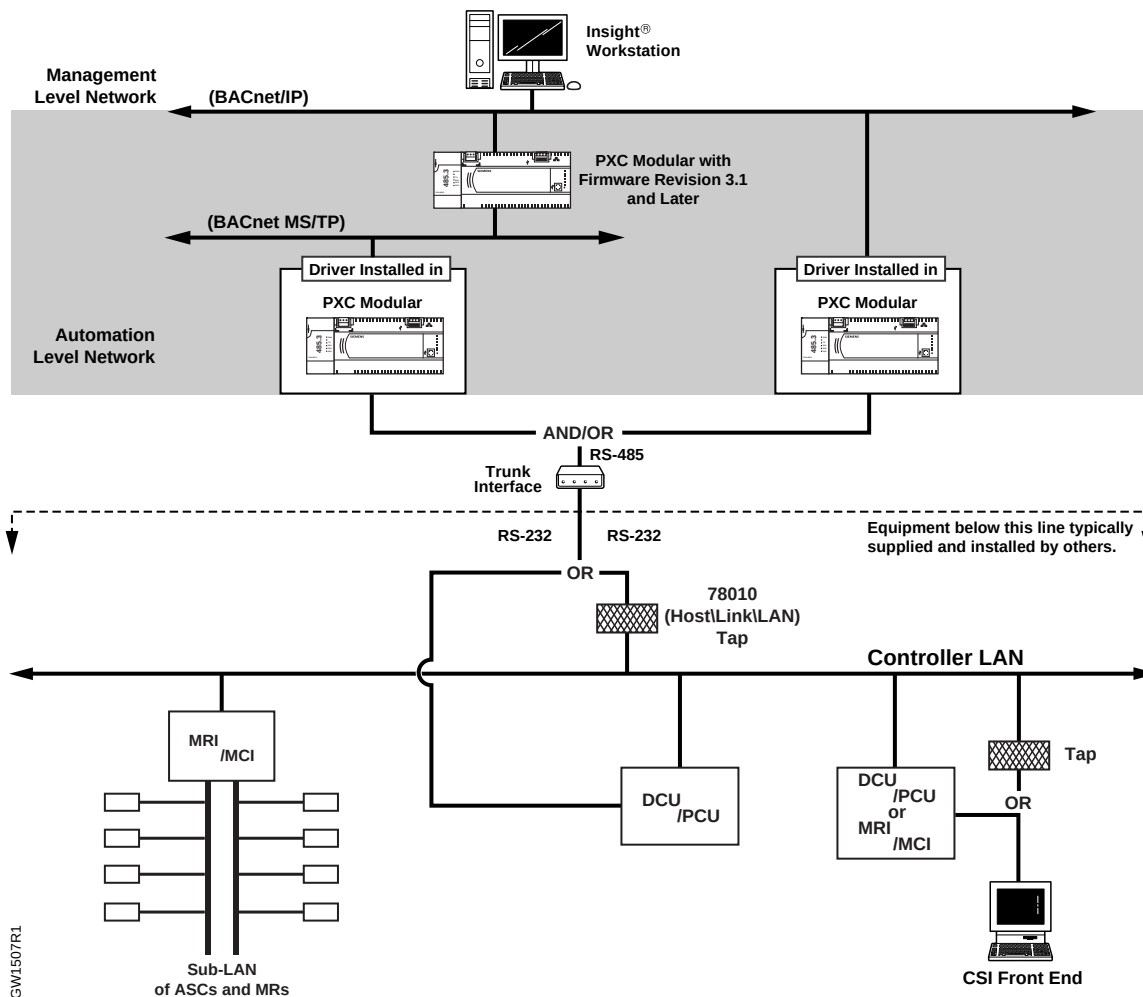


Figure 3. Typical System Architecture — Recommended (Firmware Revision 3.x).

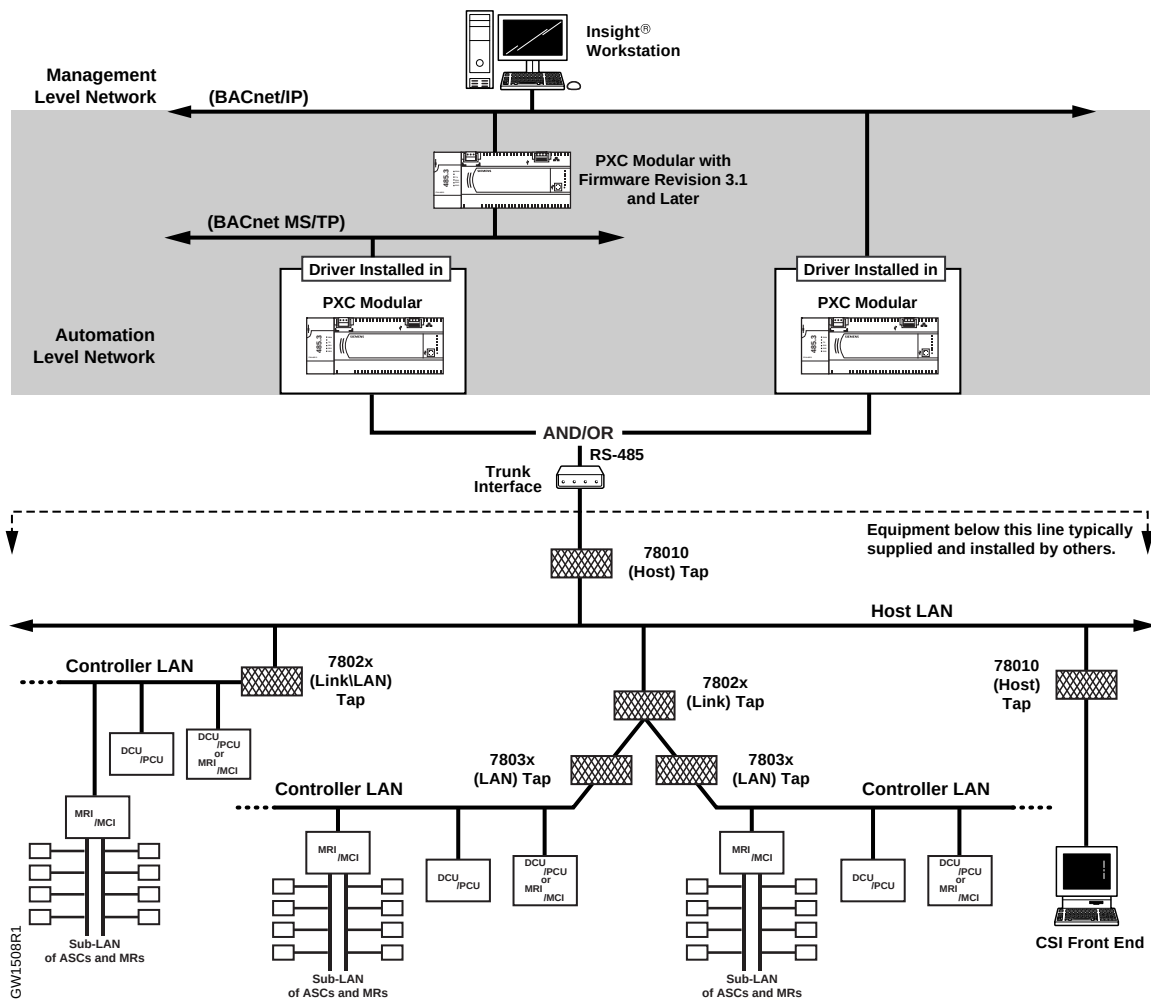


Figure 4. Alternate System Architecture (Firmware Revision 3.x).

Notes on System Architecture

The CSI Host Driver provides communication between the APOGEE® Automation System and CSI Host system.

Functionality

The CSI Host Driver can be loaded into PXC Modular hardware. The driver is a microprocessor-based, multitasking platform designed for multi-system communication and control. It communicates with Insight® software, other APOGEE field panels and controllers, and the CSI system.

Through the Insight workstation, the CSI points can be monitored and commanded. The CSI points integrated into the APOGEE Automation System can be accessed by system applications such as Powers Process Control Language, scheduling, trending, and alarming.

The CSI Host Driver will not affect, in any way, the operating sequence or safeties as factory programmed into the CSI system.

Keys to Success

Ensure that all CSI equipment to be integrated is supported by the CSI Host Driver.

Benefits

Systems integration brings the powerful facility control capabilities of the APOGEE Automation System together with the CSI system. Integrating the CSI points allows both systems to operate as a single system providing marked advantages in the following:

- Reduced operating and training costs.
- Increased employee productivity.
- Increased diagnostic capabilities to extend equipment life.

- Improved systems information and control.
- Maximized energy savings.

Products Supported

CSI systems supported by the CSI Host Driver include:

- INET 4 System
- INET 7 System
- INET 2000 System

Ordering Information

Hardware Description	Product Number
PXC Modular RS-485 or Ethernet ALN, 96 FLN nodes	PXC00-PE96.A
PXC Modular BACnet/IP or BACnet MS/TP ALN, 96 FLN nodes	PXC00-E96.A
PXC Modular RS-485 or Ethernet ALN, TX-I/O Support, 96 FLN nodes	PXC100-PE96.A
PXC Modular BACnet/IP or BACnet MS/TP ALN, TX-I/O Support, 96 FLN nodes	PXC100-E96.A
Expansion Module, three RS-485 FLN connections	PXX-485.3
High Speed Trunk Interface with 115 Vac to 6 Vdc Plug-in Power Supply	538-670
High Speed Trunk Interface with 230 Vac to 6 Vdc Plug-in Power Supply	538-675
Cable with one 25-pin male connector and one 9-pin female connector for TI-II to PC 9-pin COM port	536-004

License Description	Product Number
License to enable the CSI Host Driver	LSM-INT-CSIHOST

For more information, visit www.sbt.siemens.com.

Information in this document is based on specifications believed correct at the time of publication. The right is reserved to make changes as design improvements are introduced. Product or company names mentioned herein may be the trademarks of their respective owners.

© 2009 Siemens Industry, Inc.

Siemens Industry, Inc.
1000 Deerfield Parkway
Buffalo Grove, IL 60089-4513
U.S.A.

Document No. 127-1686
Country of Origin: US
Page 6 of 6