



Battery




Teensy v3.2

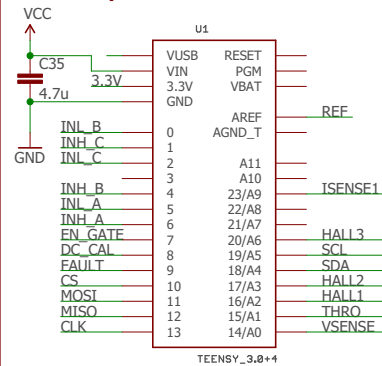


Note: Must cut the VUSB-VIN connection AND power the ESC while it is being reprogrammed


Voltage Reference




Gate Driver

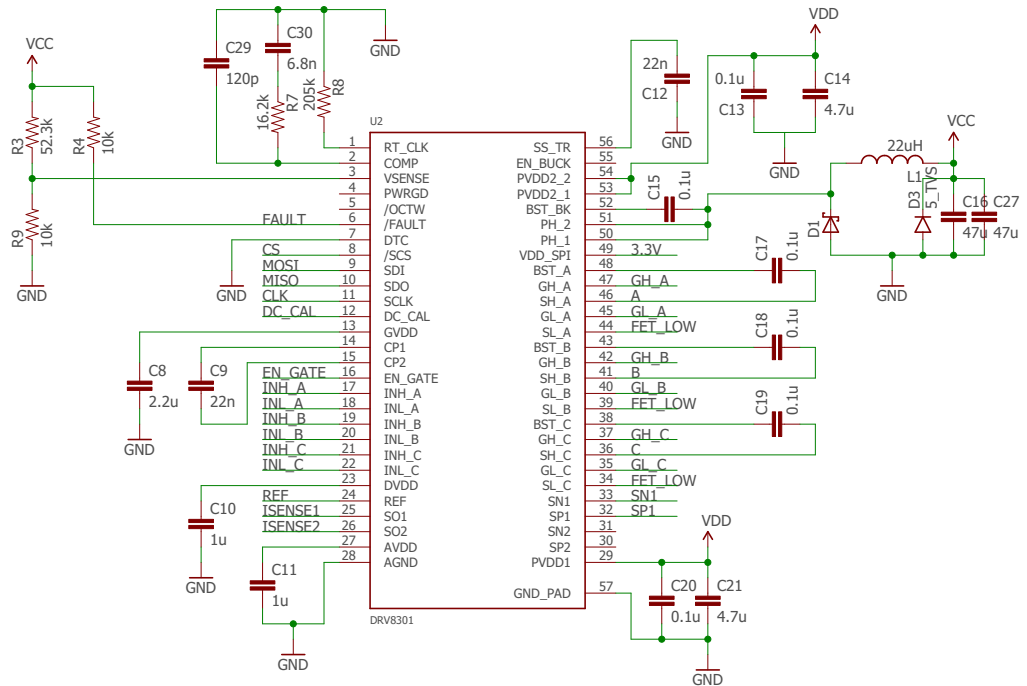


Decoupling Capacitors

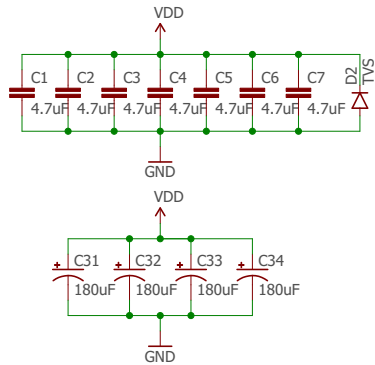


Mosfet Gates

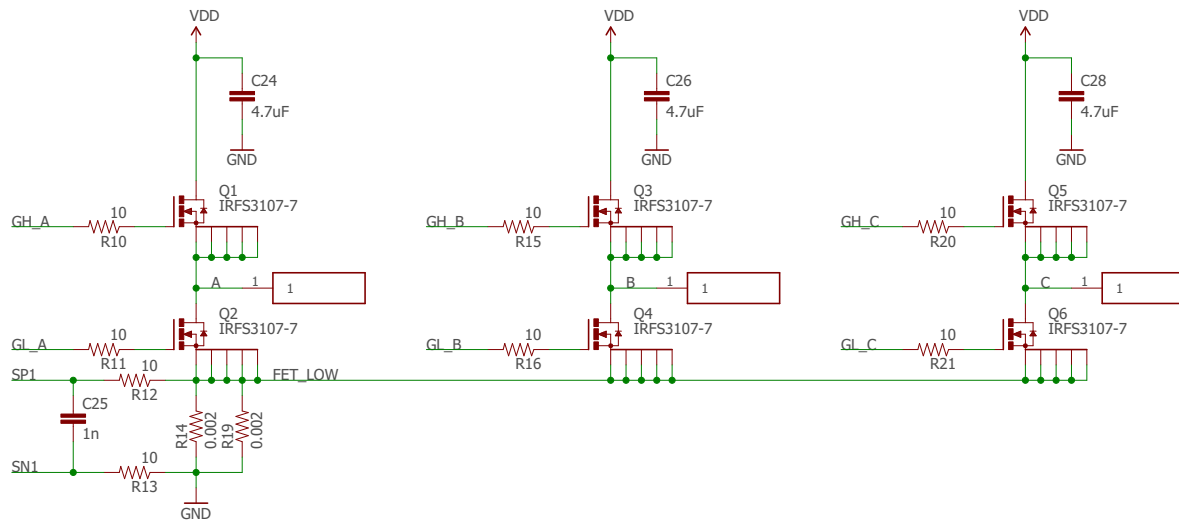

Hall Effect Sensors

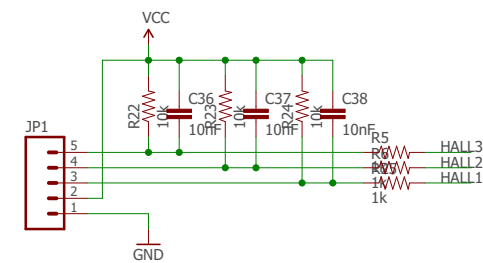

I2C Header



Throttle Input

