



(原南京米联电子科技有限公司)

Figure 1-1 shows two views of the XC7K160T FFG676-2I development board. The left view is the top of the board, featuring a green PCB with various components. Key labels include 'JTAG接口' (JTAG interface) at the top, 'QSPI FLASH' at the top right, 'XC7K160T FFG676-2I' pointing to the large white FPGA chip, '电源芯片20A' (20A power chip) at the bottom left, and '2GB DDR3(4片512MByte)' (2GB DDR3 (4x512MByte)) pointing to the four black memory modules. The right view is the bottom of the board, showing the underside of the components and the '高速连接器' (High-speed connector) and '电源连接器' (Power connector) at the top.



Title		
Size A4	Number	Revision
Date:	2019/8/13	Sheet of
File:	F:\2019\A01 Title.SchDoc	Drawn By:


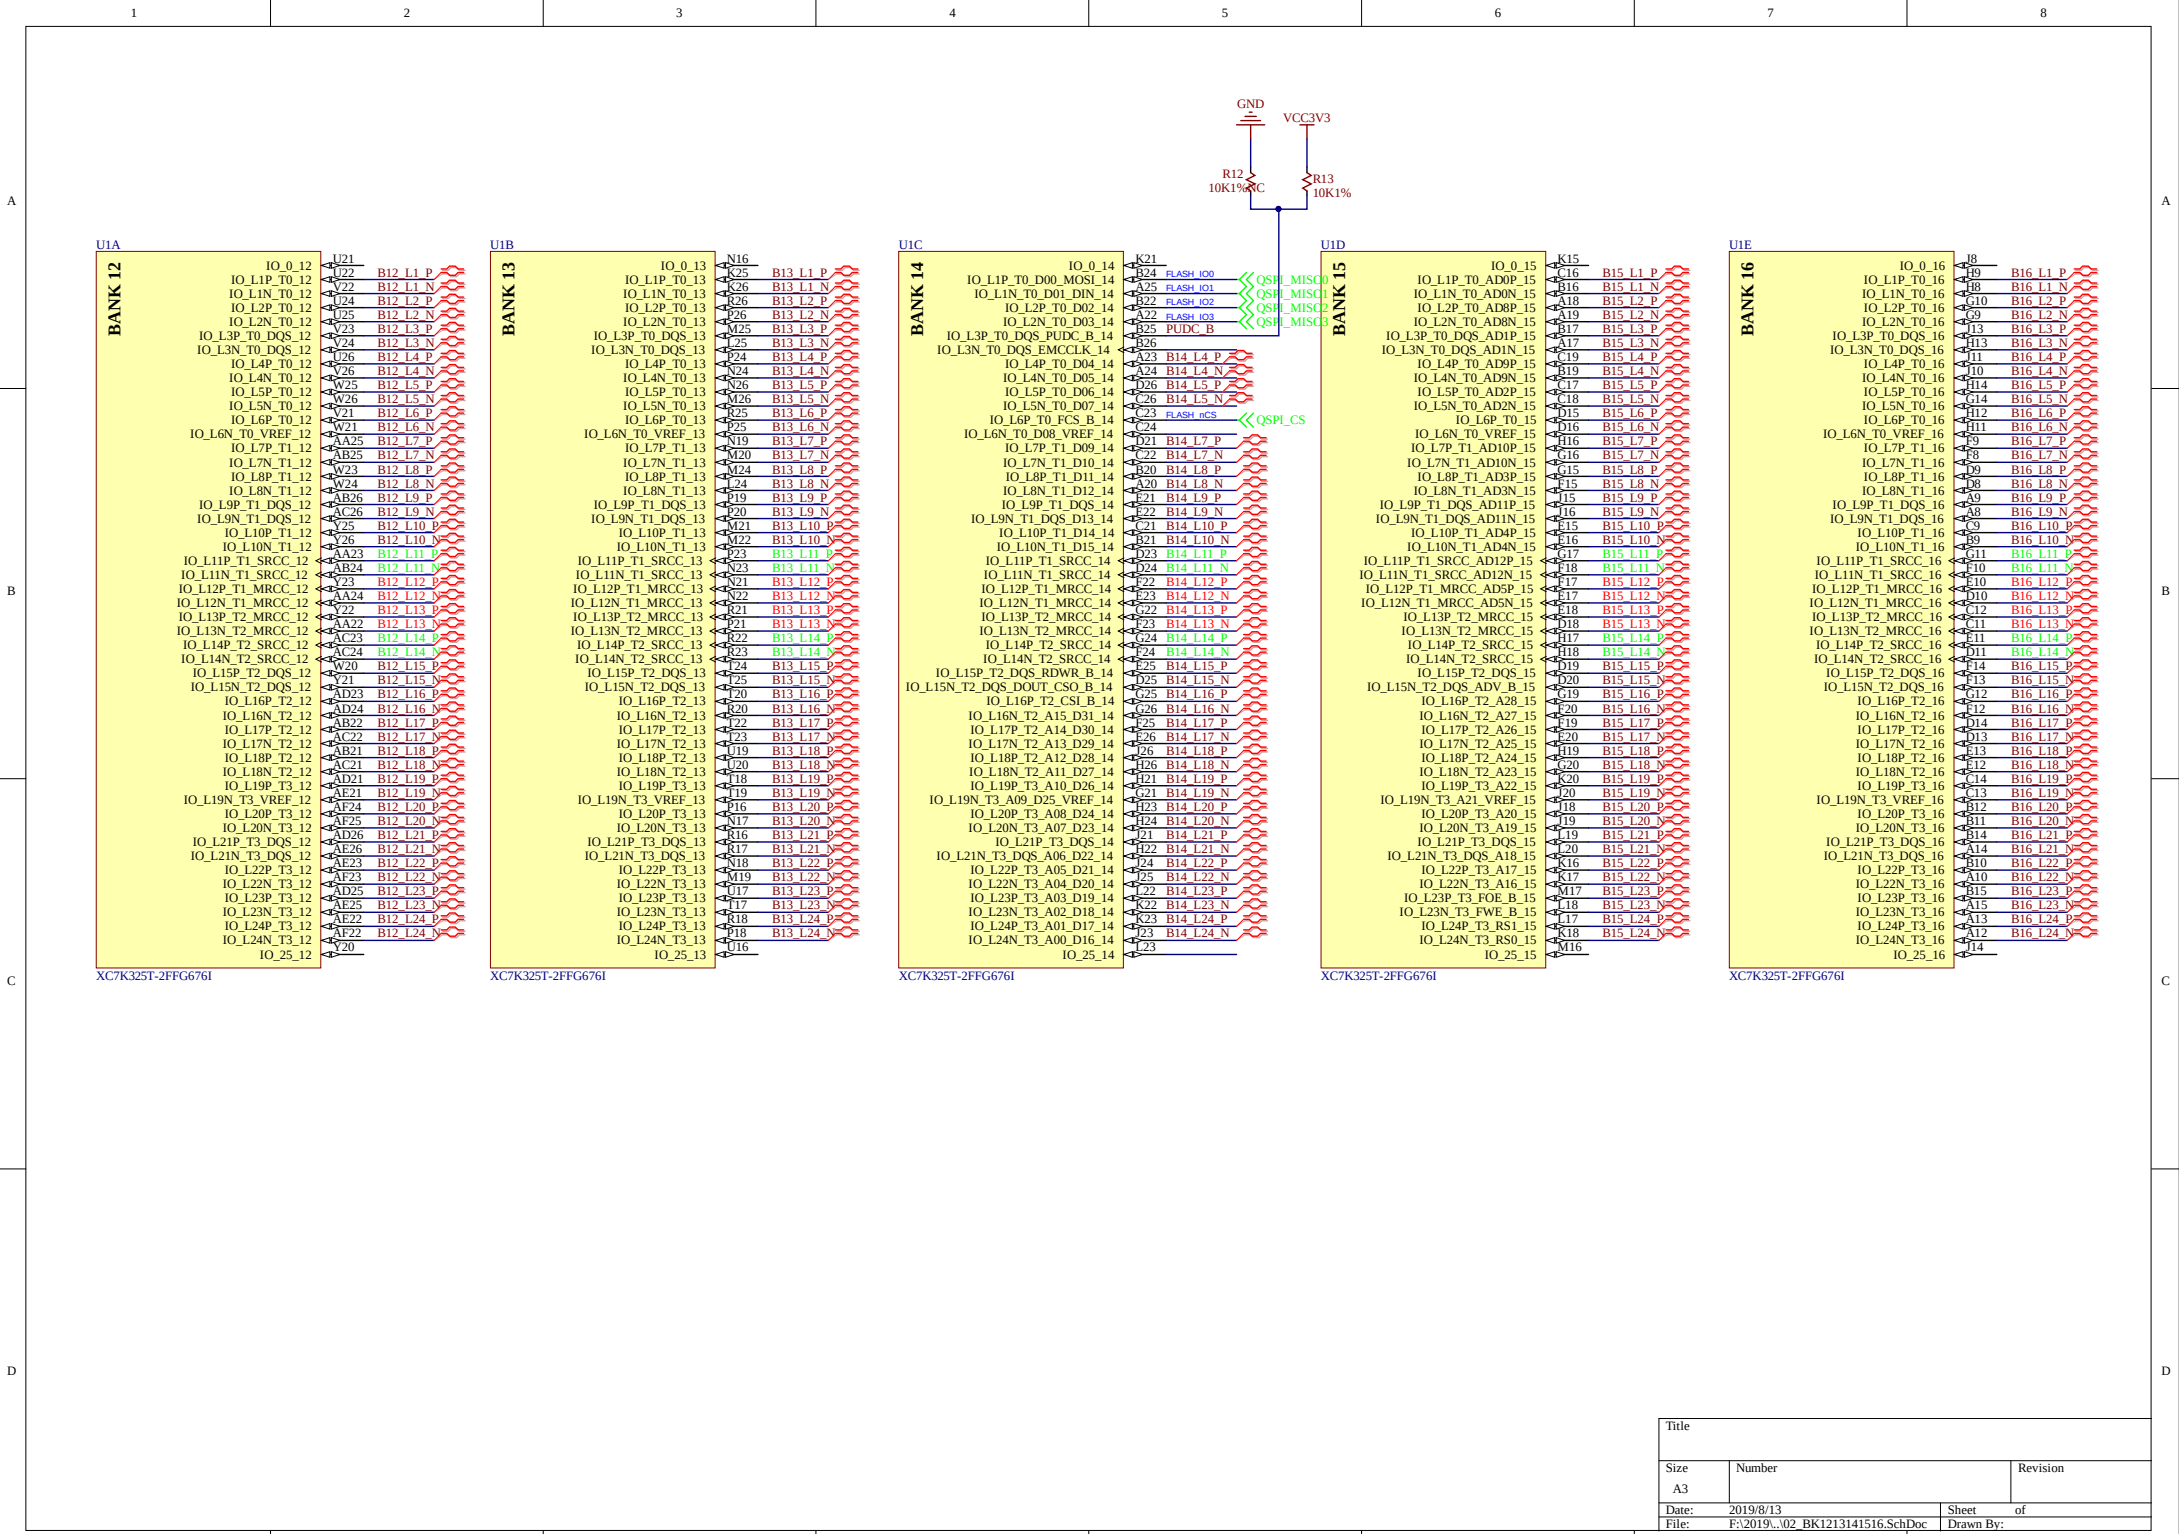



Title		
Size	Number	Revision
A3		
Date:	2019/8/13	Sheet of
File:	F:\2019...02 BK1213141516.Sch.Doc	Drawn By:

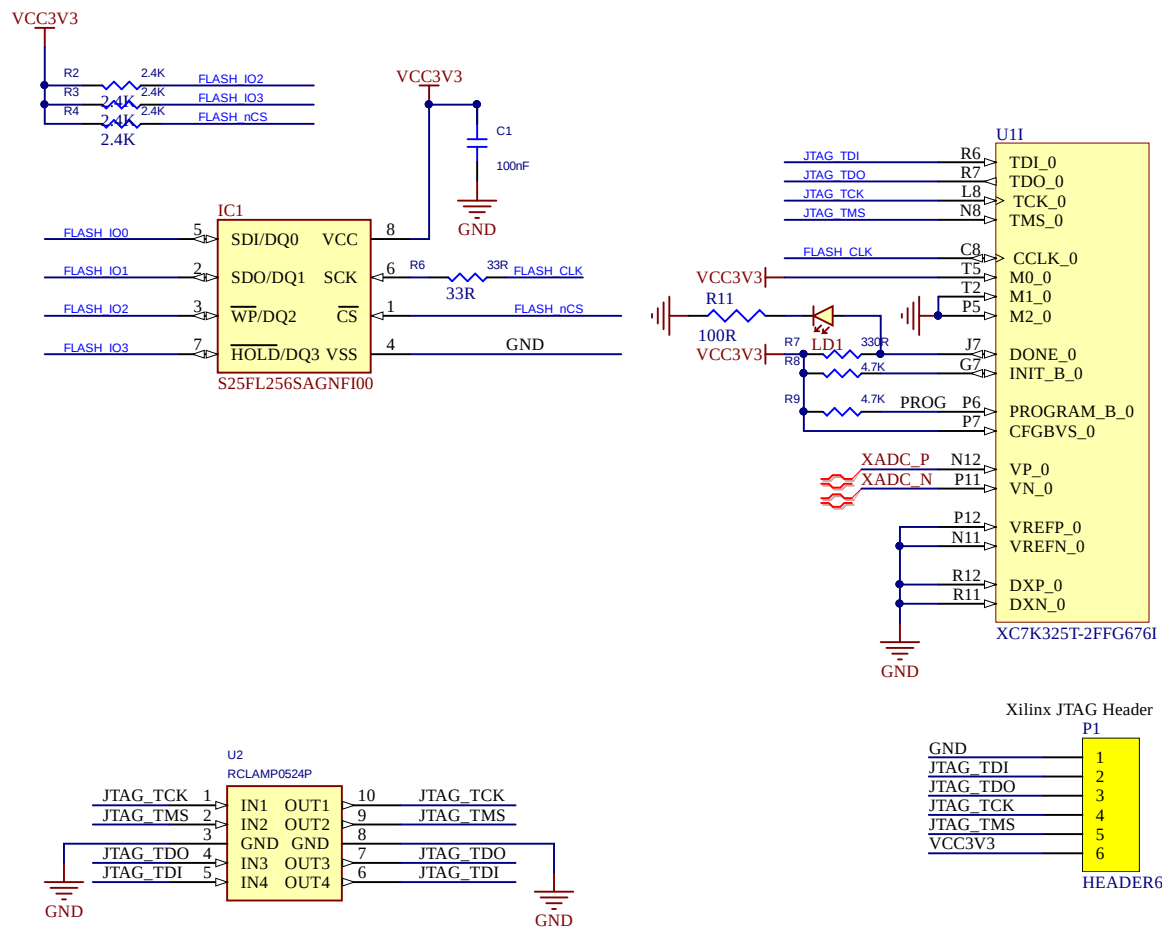




Title		
Size	Number	Revision
A4		
Date:	2019/8/13	Sheet of
File:	F:\2019\..04_BK0&FLASH.SchDoc	Drawn By:

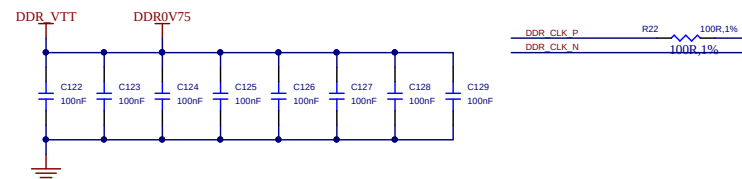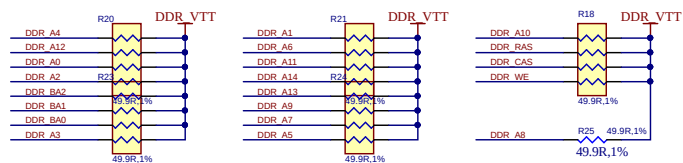

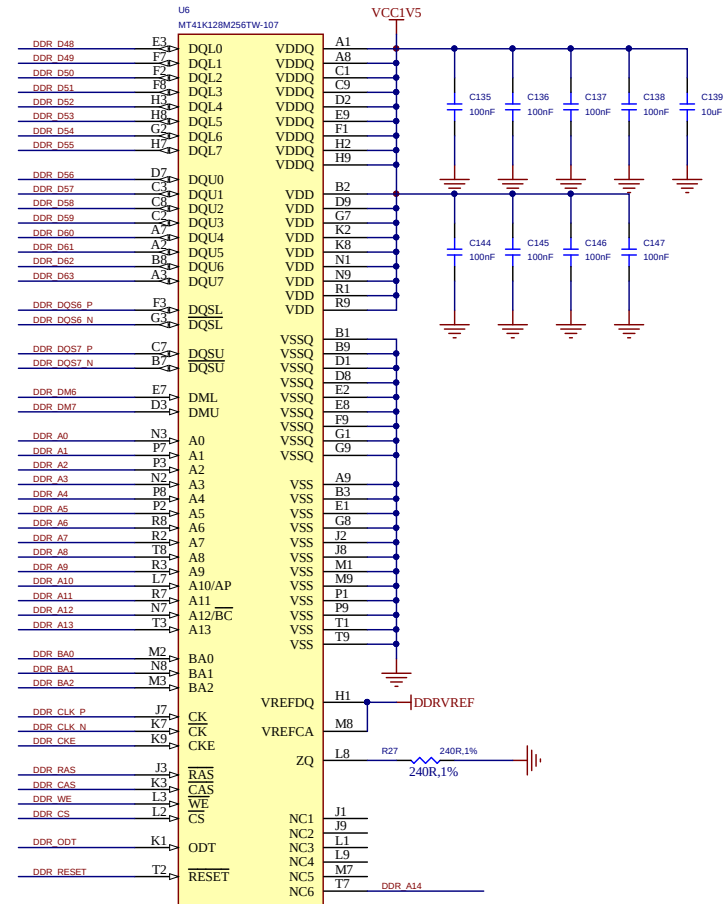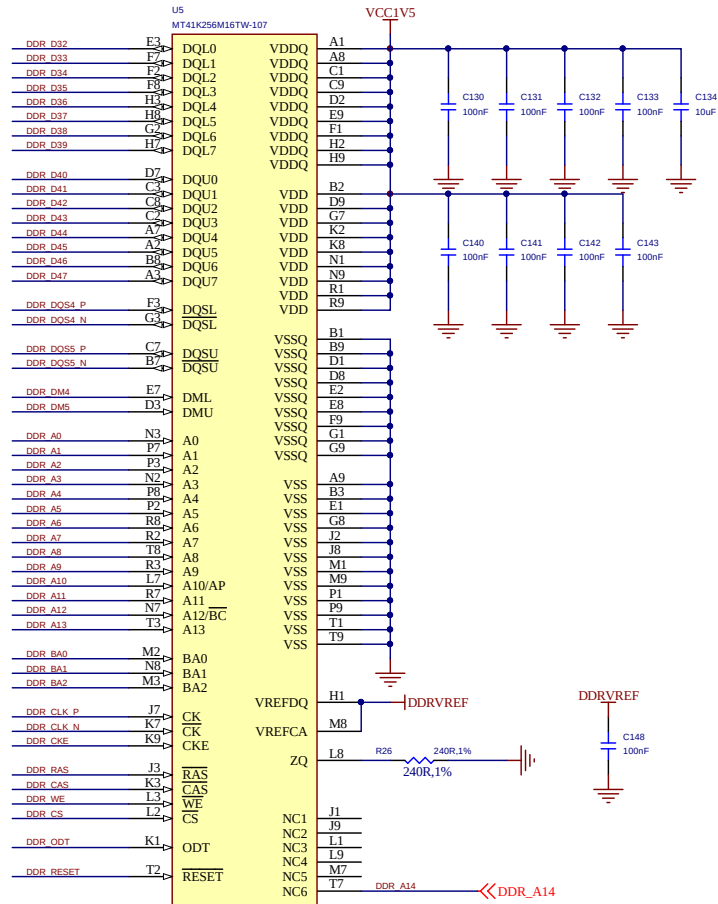

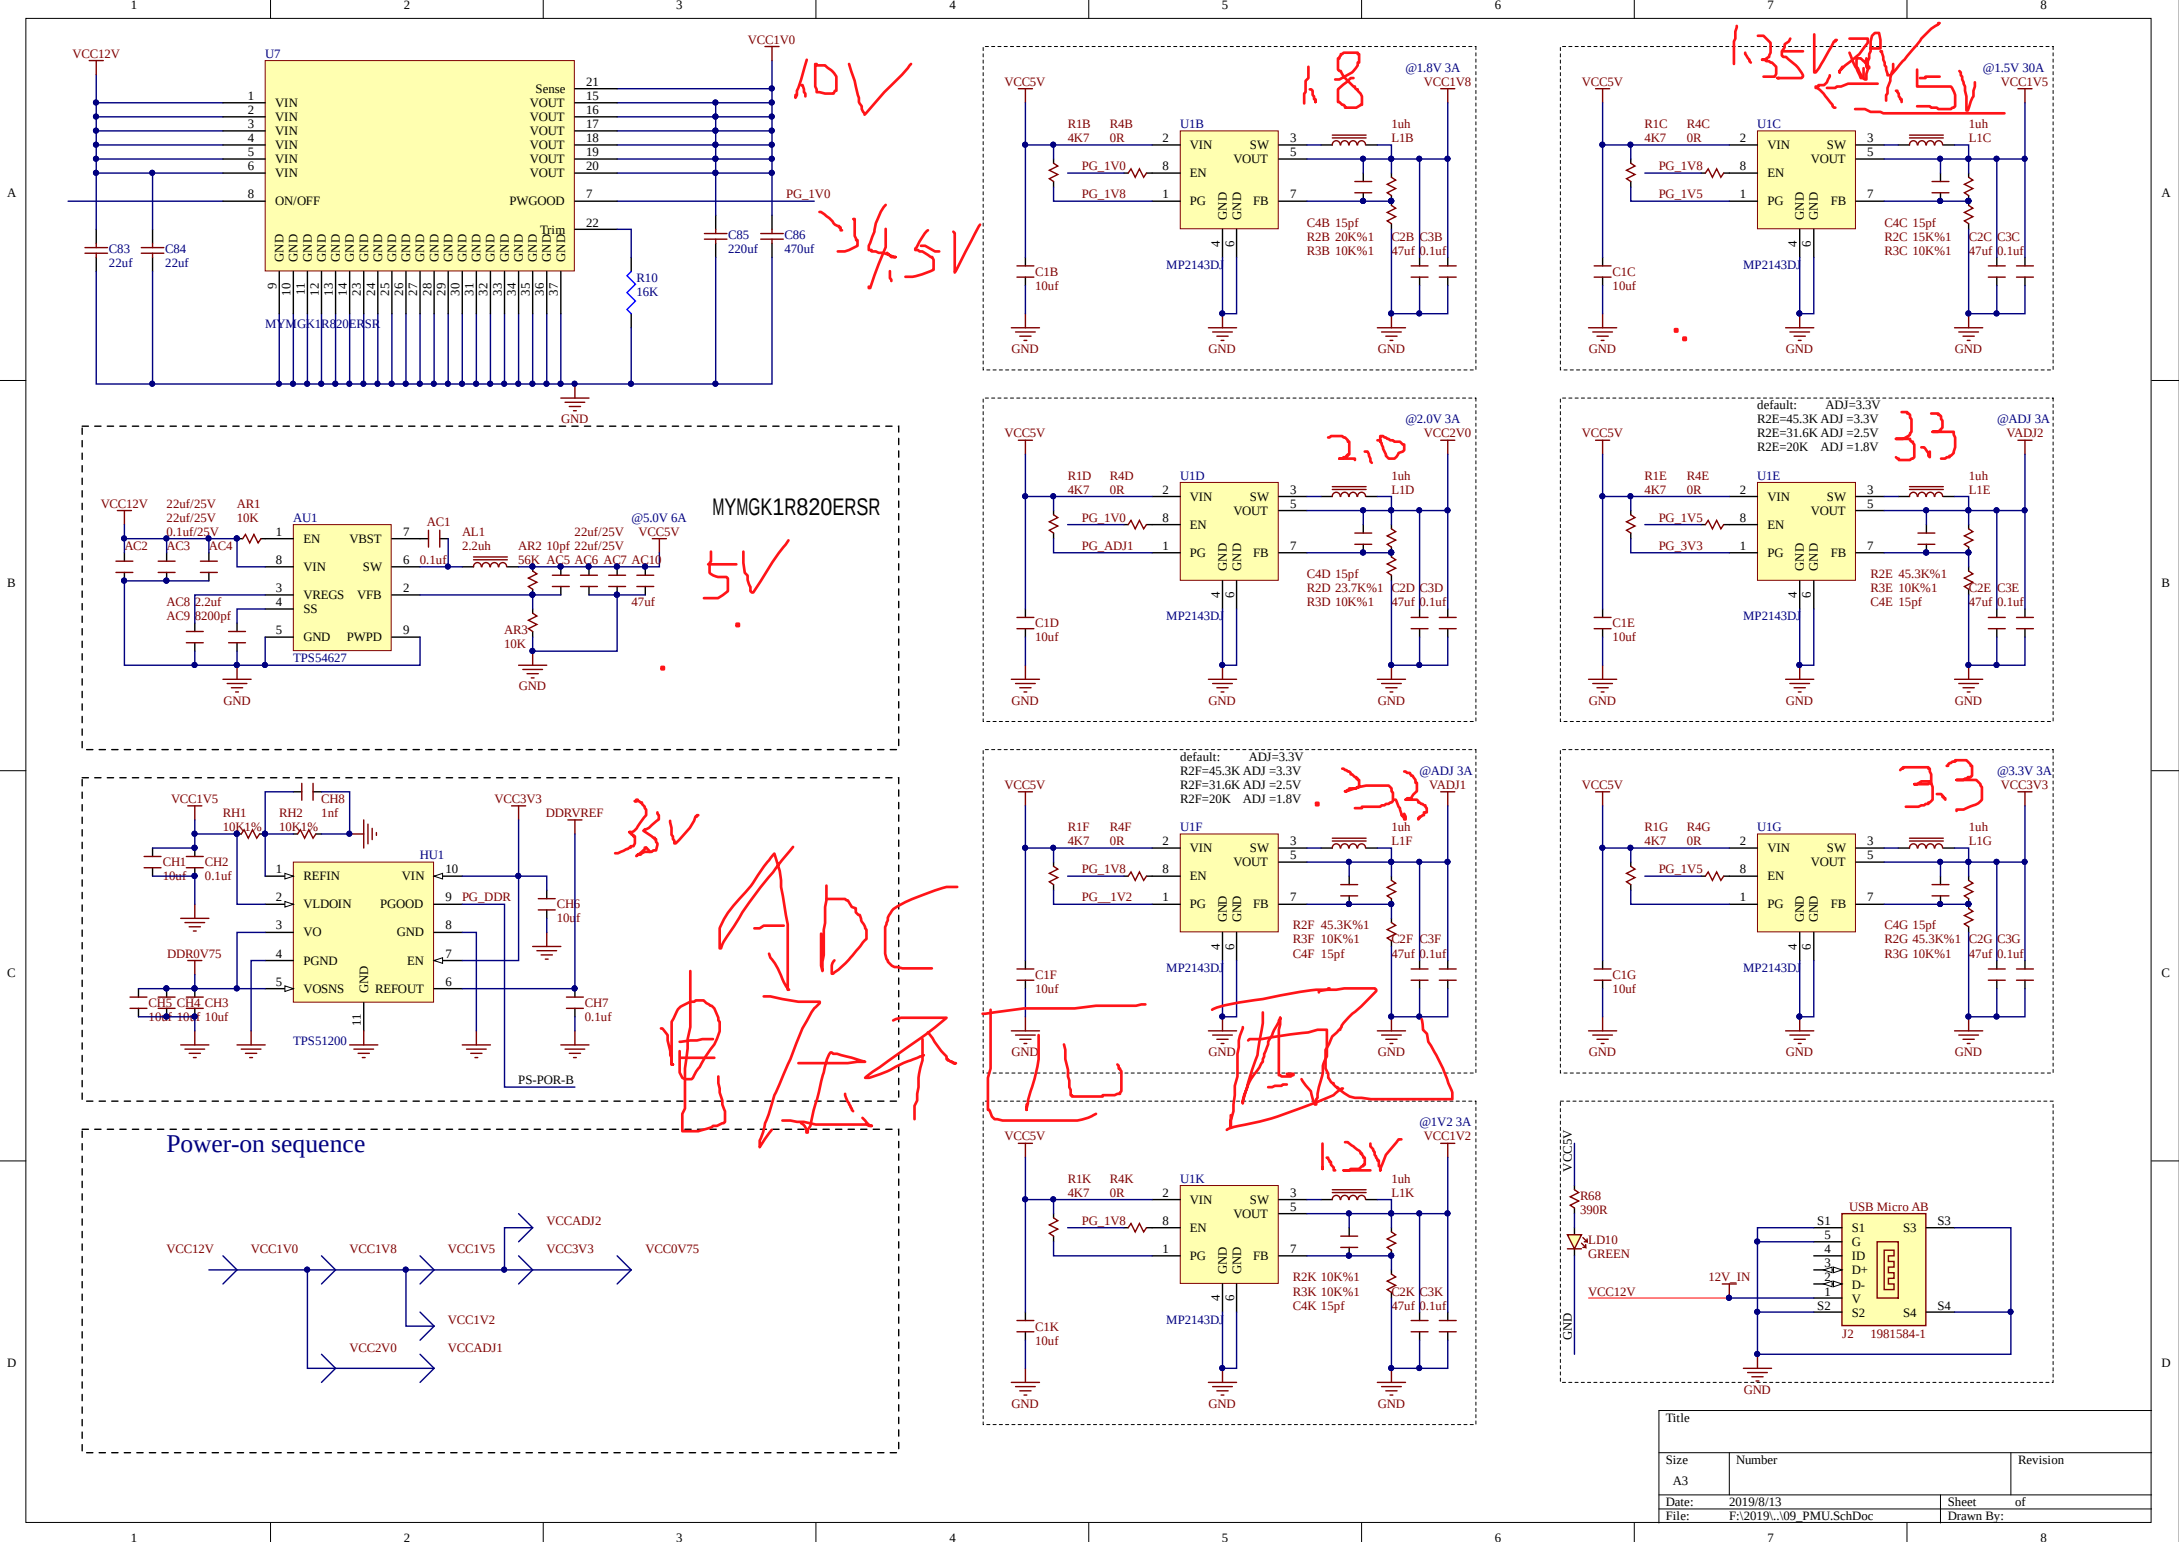

Title		
Size	Number	Revision
A3		
Date:	2019/8/13	Sheet of
File:	F:\2019...\09_PMU.SchDoc	Drawn By:

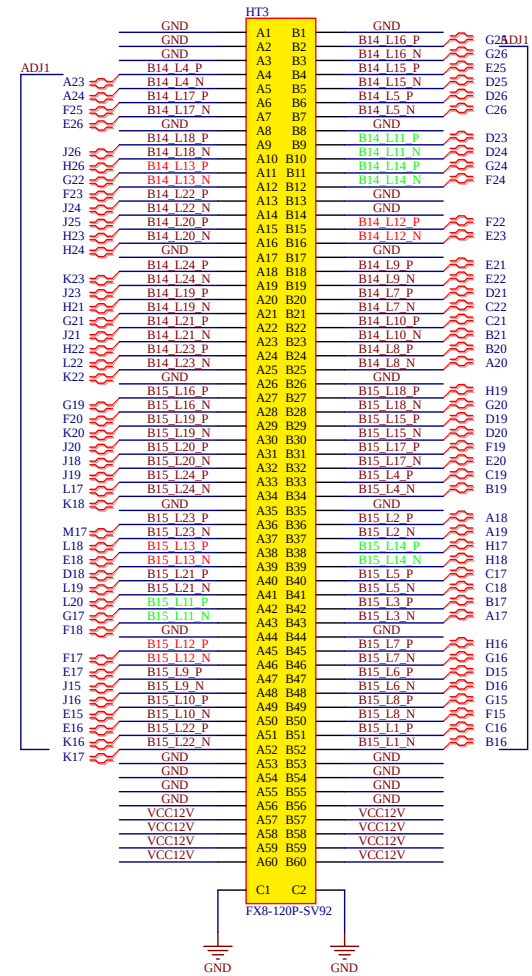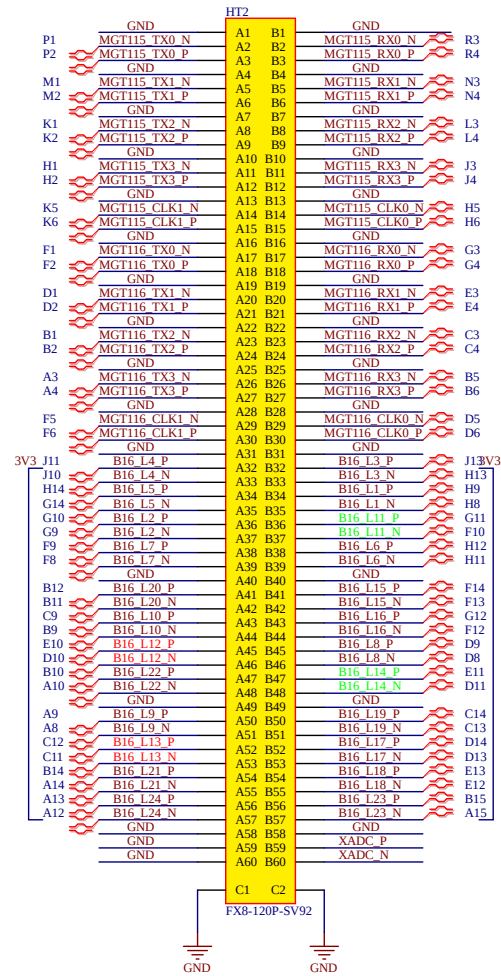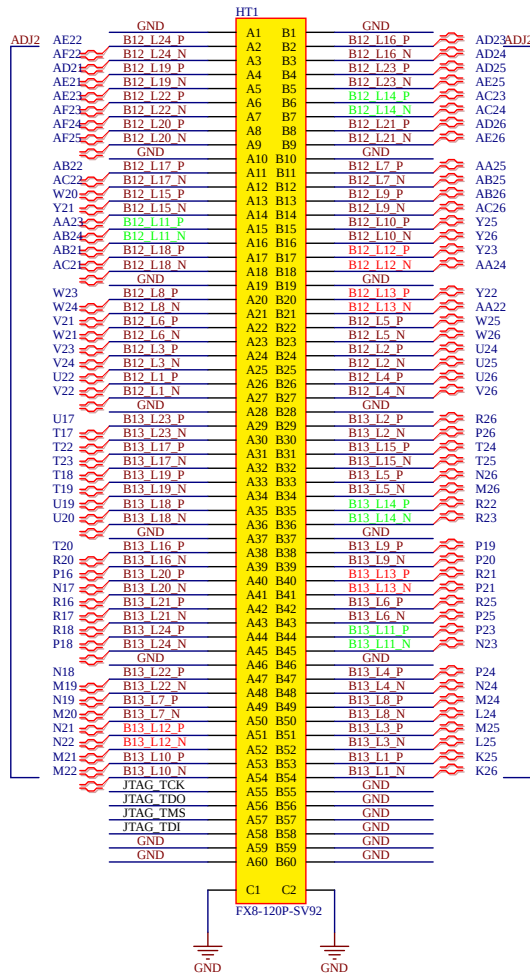

等长阻抗：所有引出BANK 差分走线等长1411mil 差分阻抗100欧姆 单端阻抗50欧姆

可用IO 232 GPIOs 或者116对差分

引出8对GTX 最高速度每个通道 10.3125Gbps