


RESULT AND OBSERVATION

Topology:

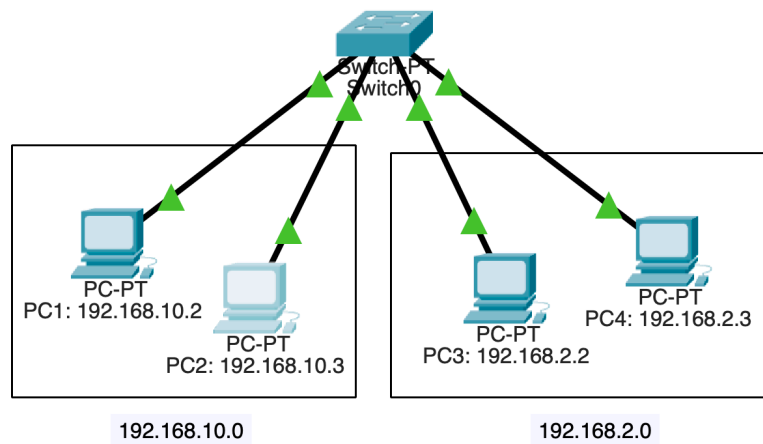

VLAN configuration:

```
Enter configuration commands, one per line.
mahesh(config)#vlan 10
mahesh(config-vlan)#name left
mahesh(config-vlan)#vlan 2
mahesh(config-vlan)#name right
mahesh(config-vlan)#exit
mahesh(config)#int fa0/1
mahesh(config-if)#switchport mode access
mahesh(config-if)#switchport access vlan 10
mahesh(config-if)#exit
mahesh(config)#int fa1/1
mahesh(config-if)#switchport mode access
mahesh(config-if)#switchport access vlan 10
mahesh(config-if)#exit
mahesh(config)#int fa2/1
mahesh(config-if)#switchport mode access
mahesh(config-if)#switchport access vlan 2
mahesh(config-if)#exit
mahesh(config)#int fa3/1
mahesh(config-if)#switchport mode access
mahesh(config-if)#switchport access vlan 2
mahesh(config-if)#exit
mahesh(config)#
```


Brief view of vlan:

```
mahesh#
mahesh#sh vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa4/1, Fa5/1
2	right	active	Fa2/1, Fa3/1
10	left	active	Fa0/1, Fa1/1
1002	fdi-default	active	
1003	token-ring-default	active	
1004	fdiinet-default	active	
1005	trnet-default	active	

```
mahesh#
```

Pinging in same vlan :

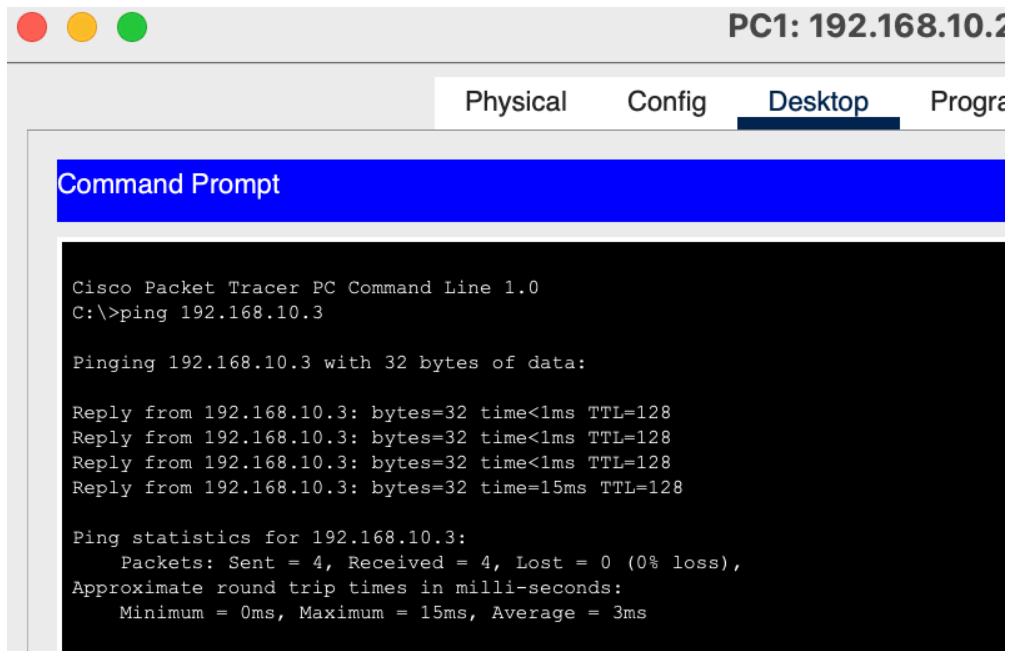

The screenshot shows a Cisco Packet Tracer PC window for PC1 with IP 192.168.10.2. The 'Desktop' tab is selected, displaying a Command Prompt. The command prompt shows a successful ping to 192.168.10.3. The output indicates that 4 packets were sent and received with 0% loss, and the average round trip time was 3ms.


```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.3

Pinging 192.168.10.3 with 32 bytes of data:

Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time=15ms TTL=128

Ping statistics for 192.168.10.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 15ms, Average = 3ms
```

Pinging in different vlan :

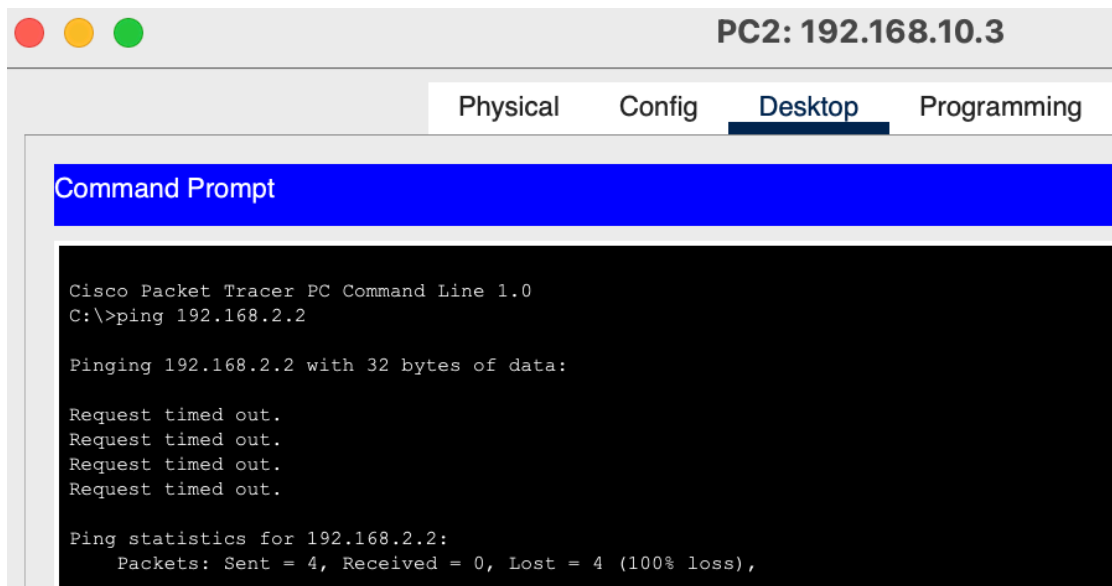

The screenshot shows a Cisco Packet Tracer PC window for PC2 with IP 192.168.10.3. The 'Desktop' tab is selected, displaying a Command Prompt. The command prompt shows a failed ping to 192.168.2.2. The output indicates that 4 packets were sent but none were received, resulting in a 100% loss.

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```