BACK WALL (+Y)

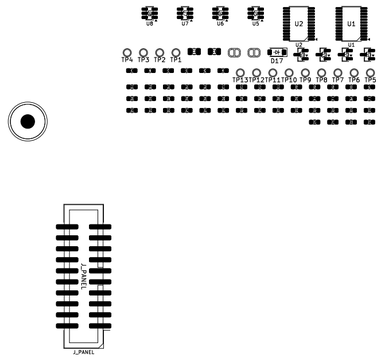

WeAct 3.7 e-paper: glass into the window, tape the two lands (foam tape), header east, 1x8 lead to J_EPD (SMD); 2.0 mm PC lens on the 0.4 mm tape frame over the window on the face



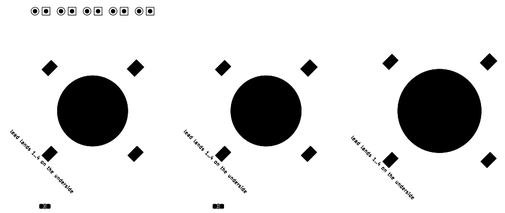

TD2 7in glass 189.32 x 120.24 centre (0,−10): align to the silk guide; die-cut 0.4 mm foam tape frame (3M VHB 5915, User.2) in the band; glass about 1.1 mm proud



STARBOARD (+X)

CONNECTOR END = PORT (−X). DO NOT ROTATE THE DISPLAY

PORT (−X)

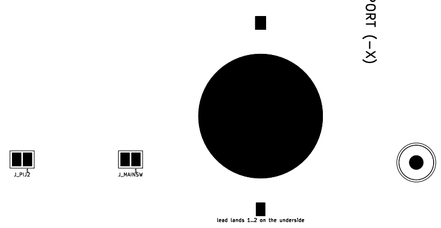

PCB-C UNDERSIDE (REV A, C5, MESHSAT-709, 2026-09-04) — sealed face: plugged vias, gasket band, silicone beads on the LED joints — faces PCB-B — ribbon J_PANEL (SMD), leads J_MAINSW / J_PIJ2 on solder lands

FRONT WALL (−Y) v v v

MESHSAT-709. Case-centred frame, +Y = case back wall. Panel in the Peli 1520PF frame. Generated

MeshSat

Sheet:

File: pcb-c-display.kicad_pcb

Title: MeshSat Field Kit carrier — PCB-C CONTROL PANEL

Size: A2	Date: 2026-09-04	**Rev: A (C5)**
KiCad E.D.A. 9.0.9		Id: 1/1