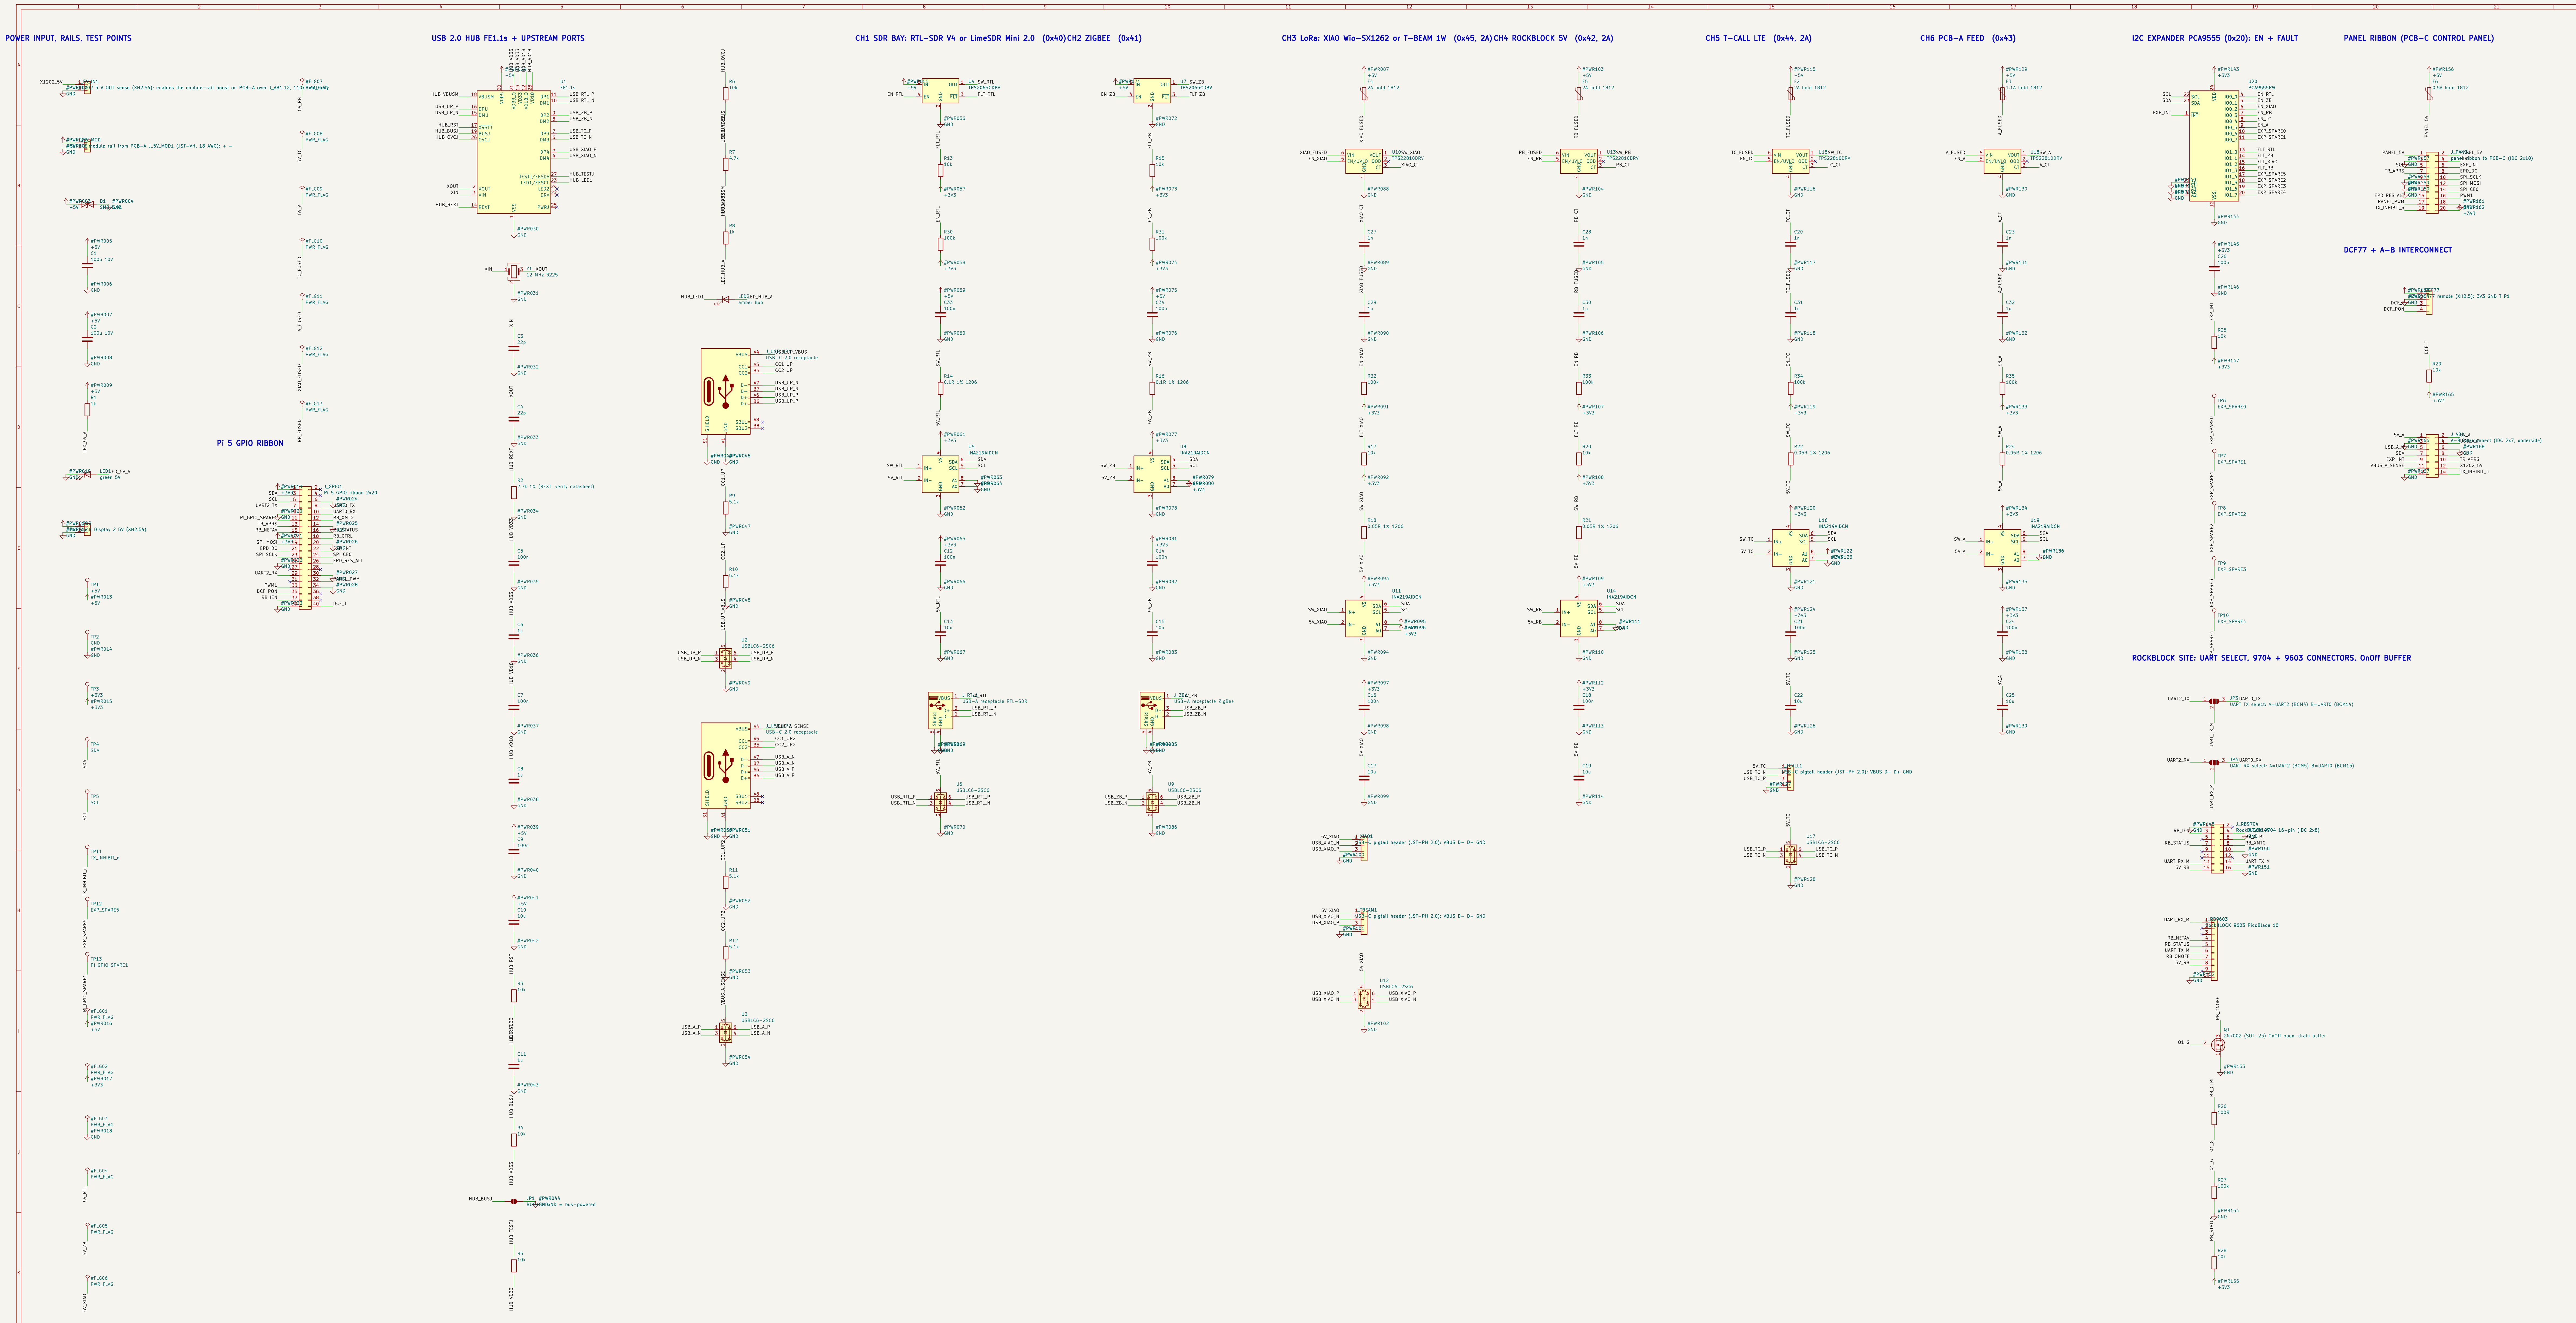
POWER INPUT, RAILS, TEST POINTS
USB 2.0 HUB FE1.1s + UPSTREAM PORTS
PI 5 GPIO RIBBON
CH1 SDR BAY: RTL-SDR V4 or LimeSDR Mini 2.0 (0x40)
CH2 ZIGBEE (0x41)
CH3 LoRa: XIAO Wio-SX1262 or T-BEAM 1W (0x45, 2A)
CH4 ROCKBLOCK 5V (0x42, 2A)
CH5 T-CALL LTE (0x44, 2A)
CH6 PCB-A FEED (0x43)
I2C EXPANDER PCA9555 (0x20): EN + FAULT
PANEL RIBBON (PCB-C CONTROL PANEL)
DCF77 + A-B INTERCONNECT
ROCKBLOCK SITE: UART SELECT, 9704 + 9603 CONNECTORS, OnOff BUFFER

MESHSAT-709. B11: +5V from the PCB-A module-rail boost over J_5V_MOD (VH); the X1202 XH outpu
Phase B2 schematic (B4 re-layout), generated by tools/gen_sch_b.py. Netlist style: every pin carries

MeshSat

Sheet: /
File: pcb-b-compute.kicad_sch

Title: MeshSat Field Kit carrier – PCB-B COMPUTE

Size: A0 | Date: 2026-09-02 | **Rev: A**
KiCad E.D.A. 9.0.9 | Id: 1/1