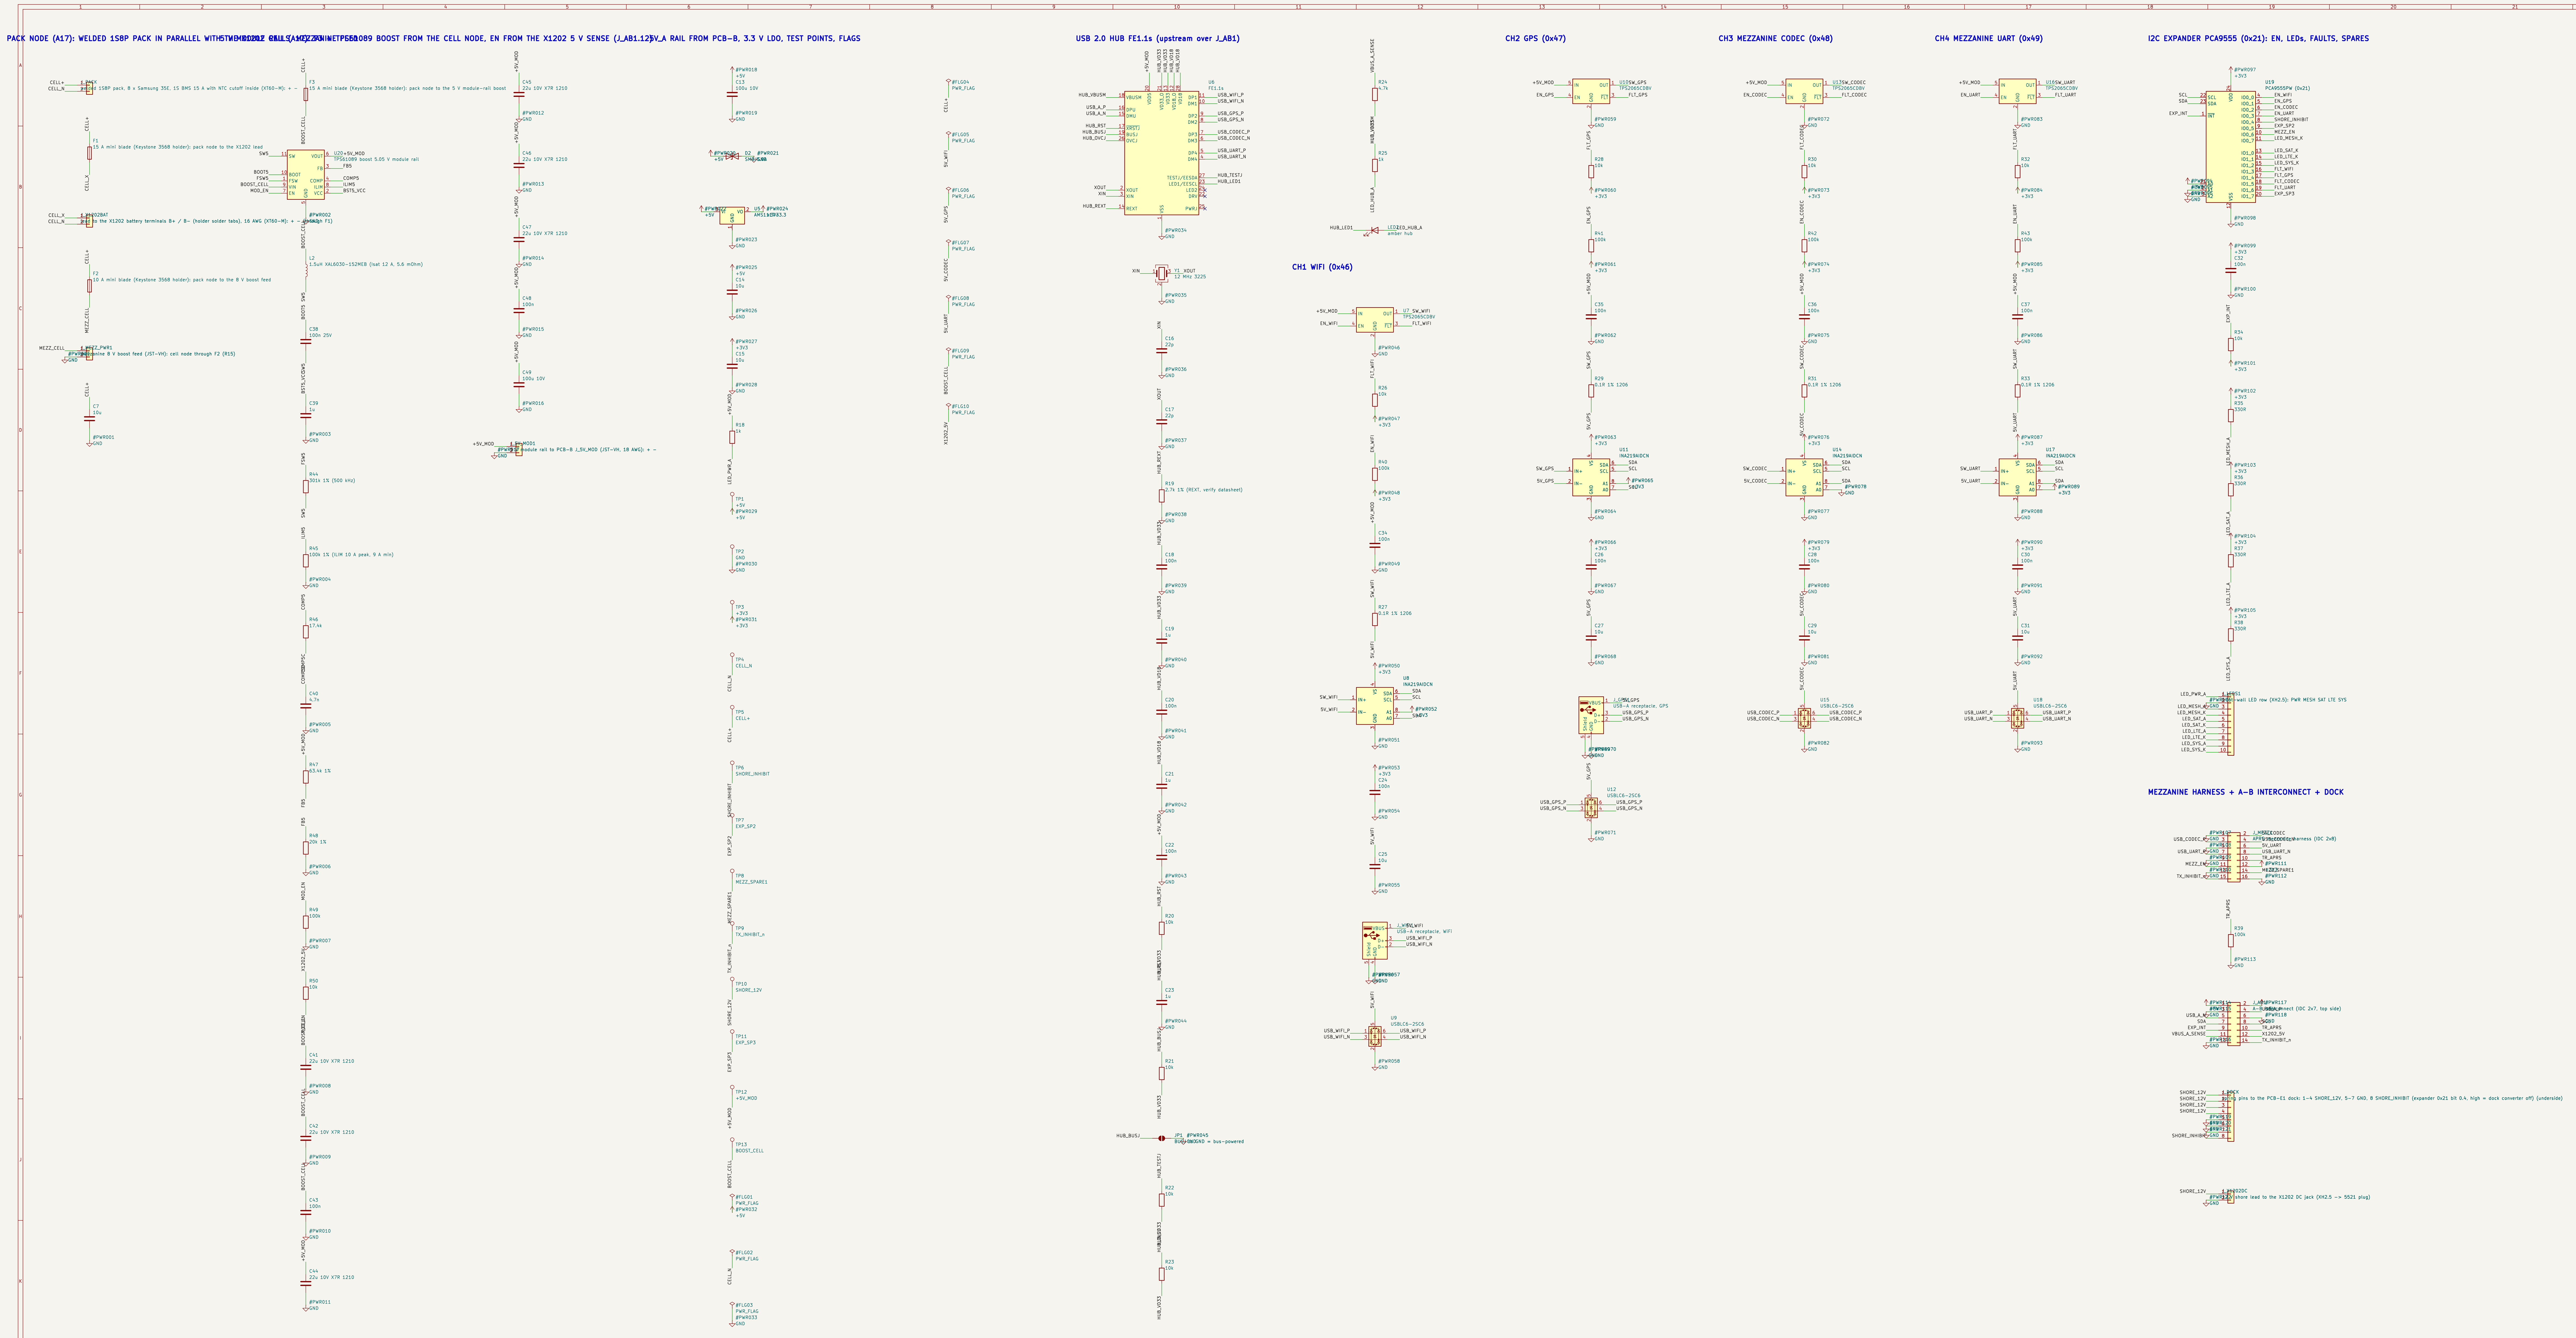
PACK NODE (A17): WELDED 1S8P PACK IN PARALLEL WITH THE X1202 CELLS (A17)
5 V MODULE RAIL (A17): TPS61089 BOOST FROM THE CELL NODE, EN FROM THE X1202 5 V SENSE (J_AB1.12)
5V_A RAIL FROM PCB-B, 3.3 V LDO, TEST POINTS, FLAGS
USB 2.0 HUB FE1.1s (upstream over J_AB1)
CH1 WIFI (0x46)
CH2 GPS (0x47)
CH3 MEZZANINE CODEC (0x48)
CH4 MEZZANINE UART (0x49)
I2C EXPANDER PCA9555 (0x21): EN, LEDs, FAULTS, SPARES
MEZZANINE HARNESS + A-B INTERCONNECT + DOCK

MESHSAT-709. A17: 5 V module rail (F3, TPS61089 boost from the cell node, EN from the X1202 5 V
Phase A2 schematic (A4: 16.3 fixes), generated by tools/gen_sch_a.py. Netlist style: every pin carries

MeshSat

Sheet: /
File: pcb-a-power.kicad_sch

Title: MeshSat Field Kit carrier – PCB-A POWER + I/O

Size: A0
Date: 2026-09-02
Rev: A
KiCad E.D.A. 9.0.9
Id: 1/1