




PACK NODE OVER THE DOCK BLOCK (32.56): 9 A PINS, PRE-CHARGE, 25 A BLADE, DOCK SIGNAL PINS

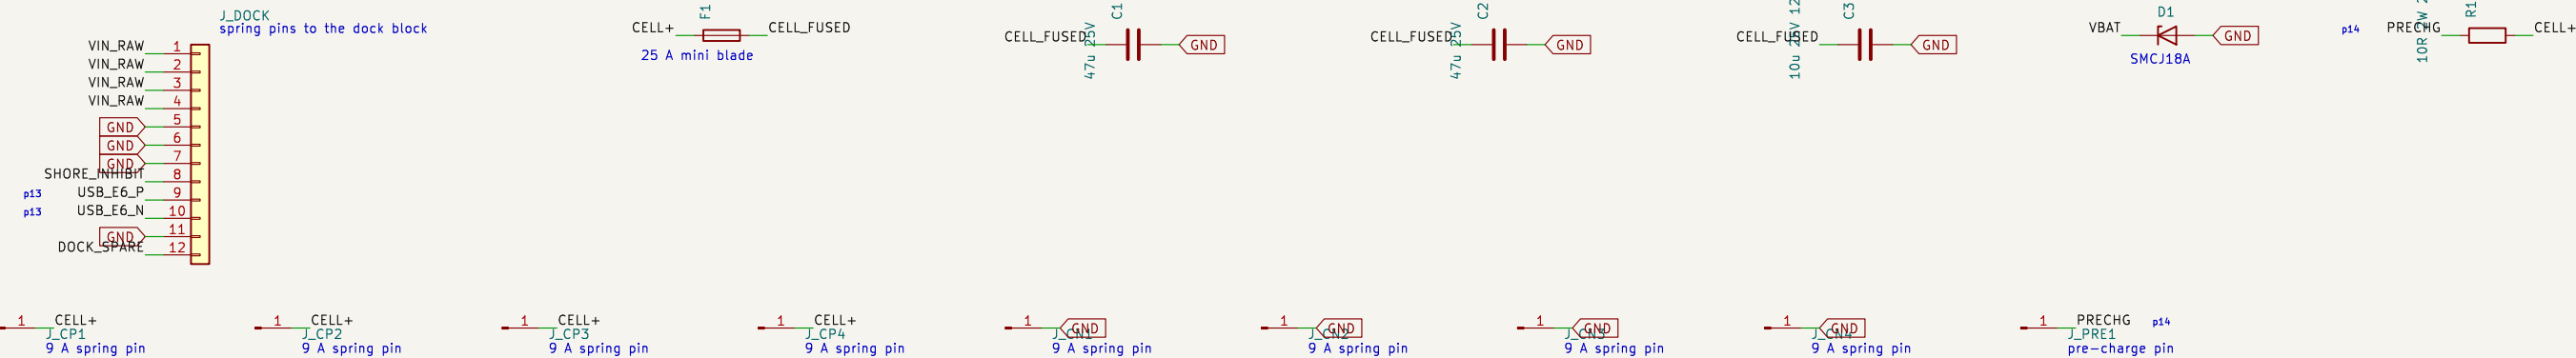


MAIN POWER CONTROL LTC2954

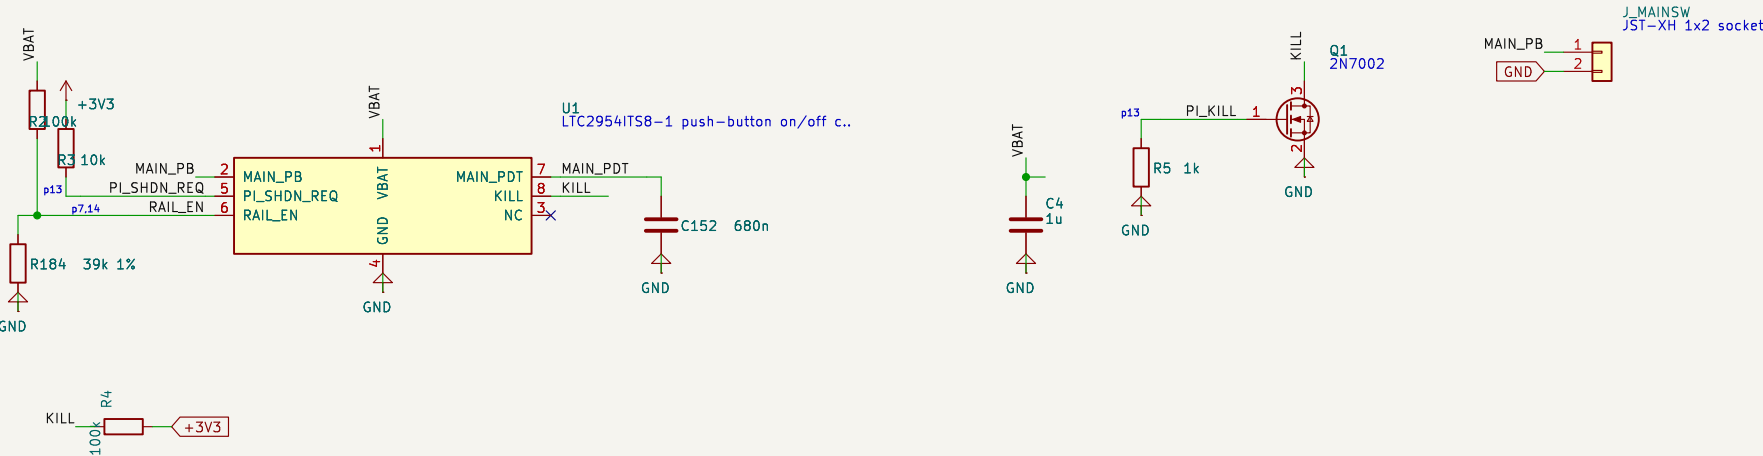


FRONT END: LM5176 FROM THE 9 TO 36 V INPUT TO THE 20 V CHARGE BUS

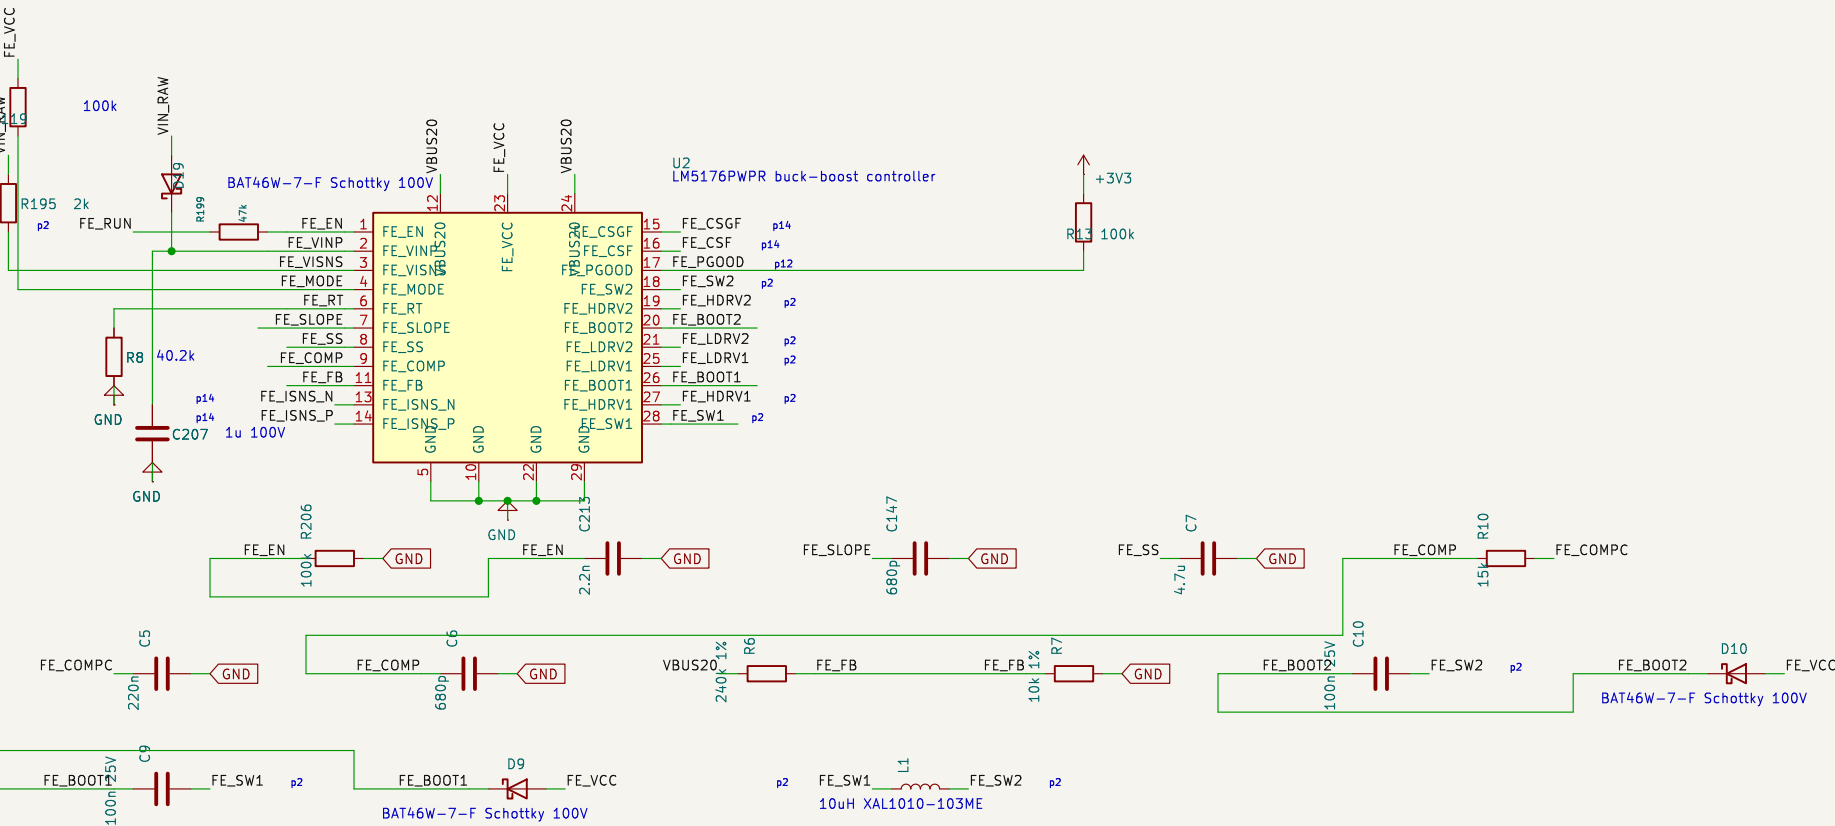


FRONT END: LM5176 FROM THE 9 TO 36 V INPUT TO THE 20 V CHARGE BUS (continued)

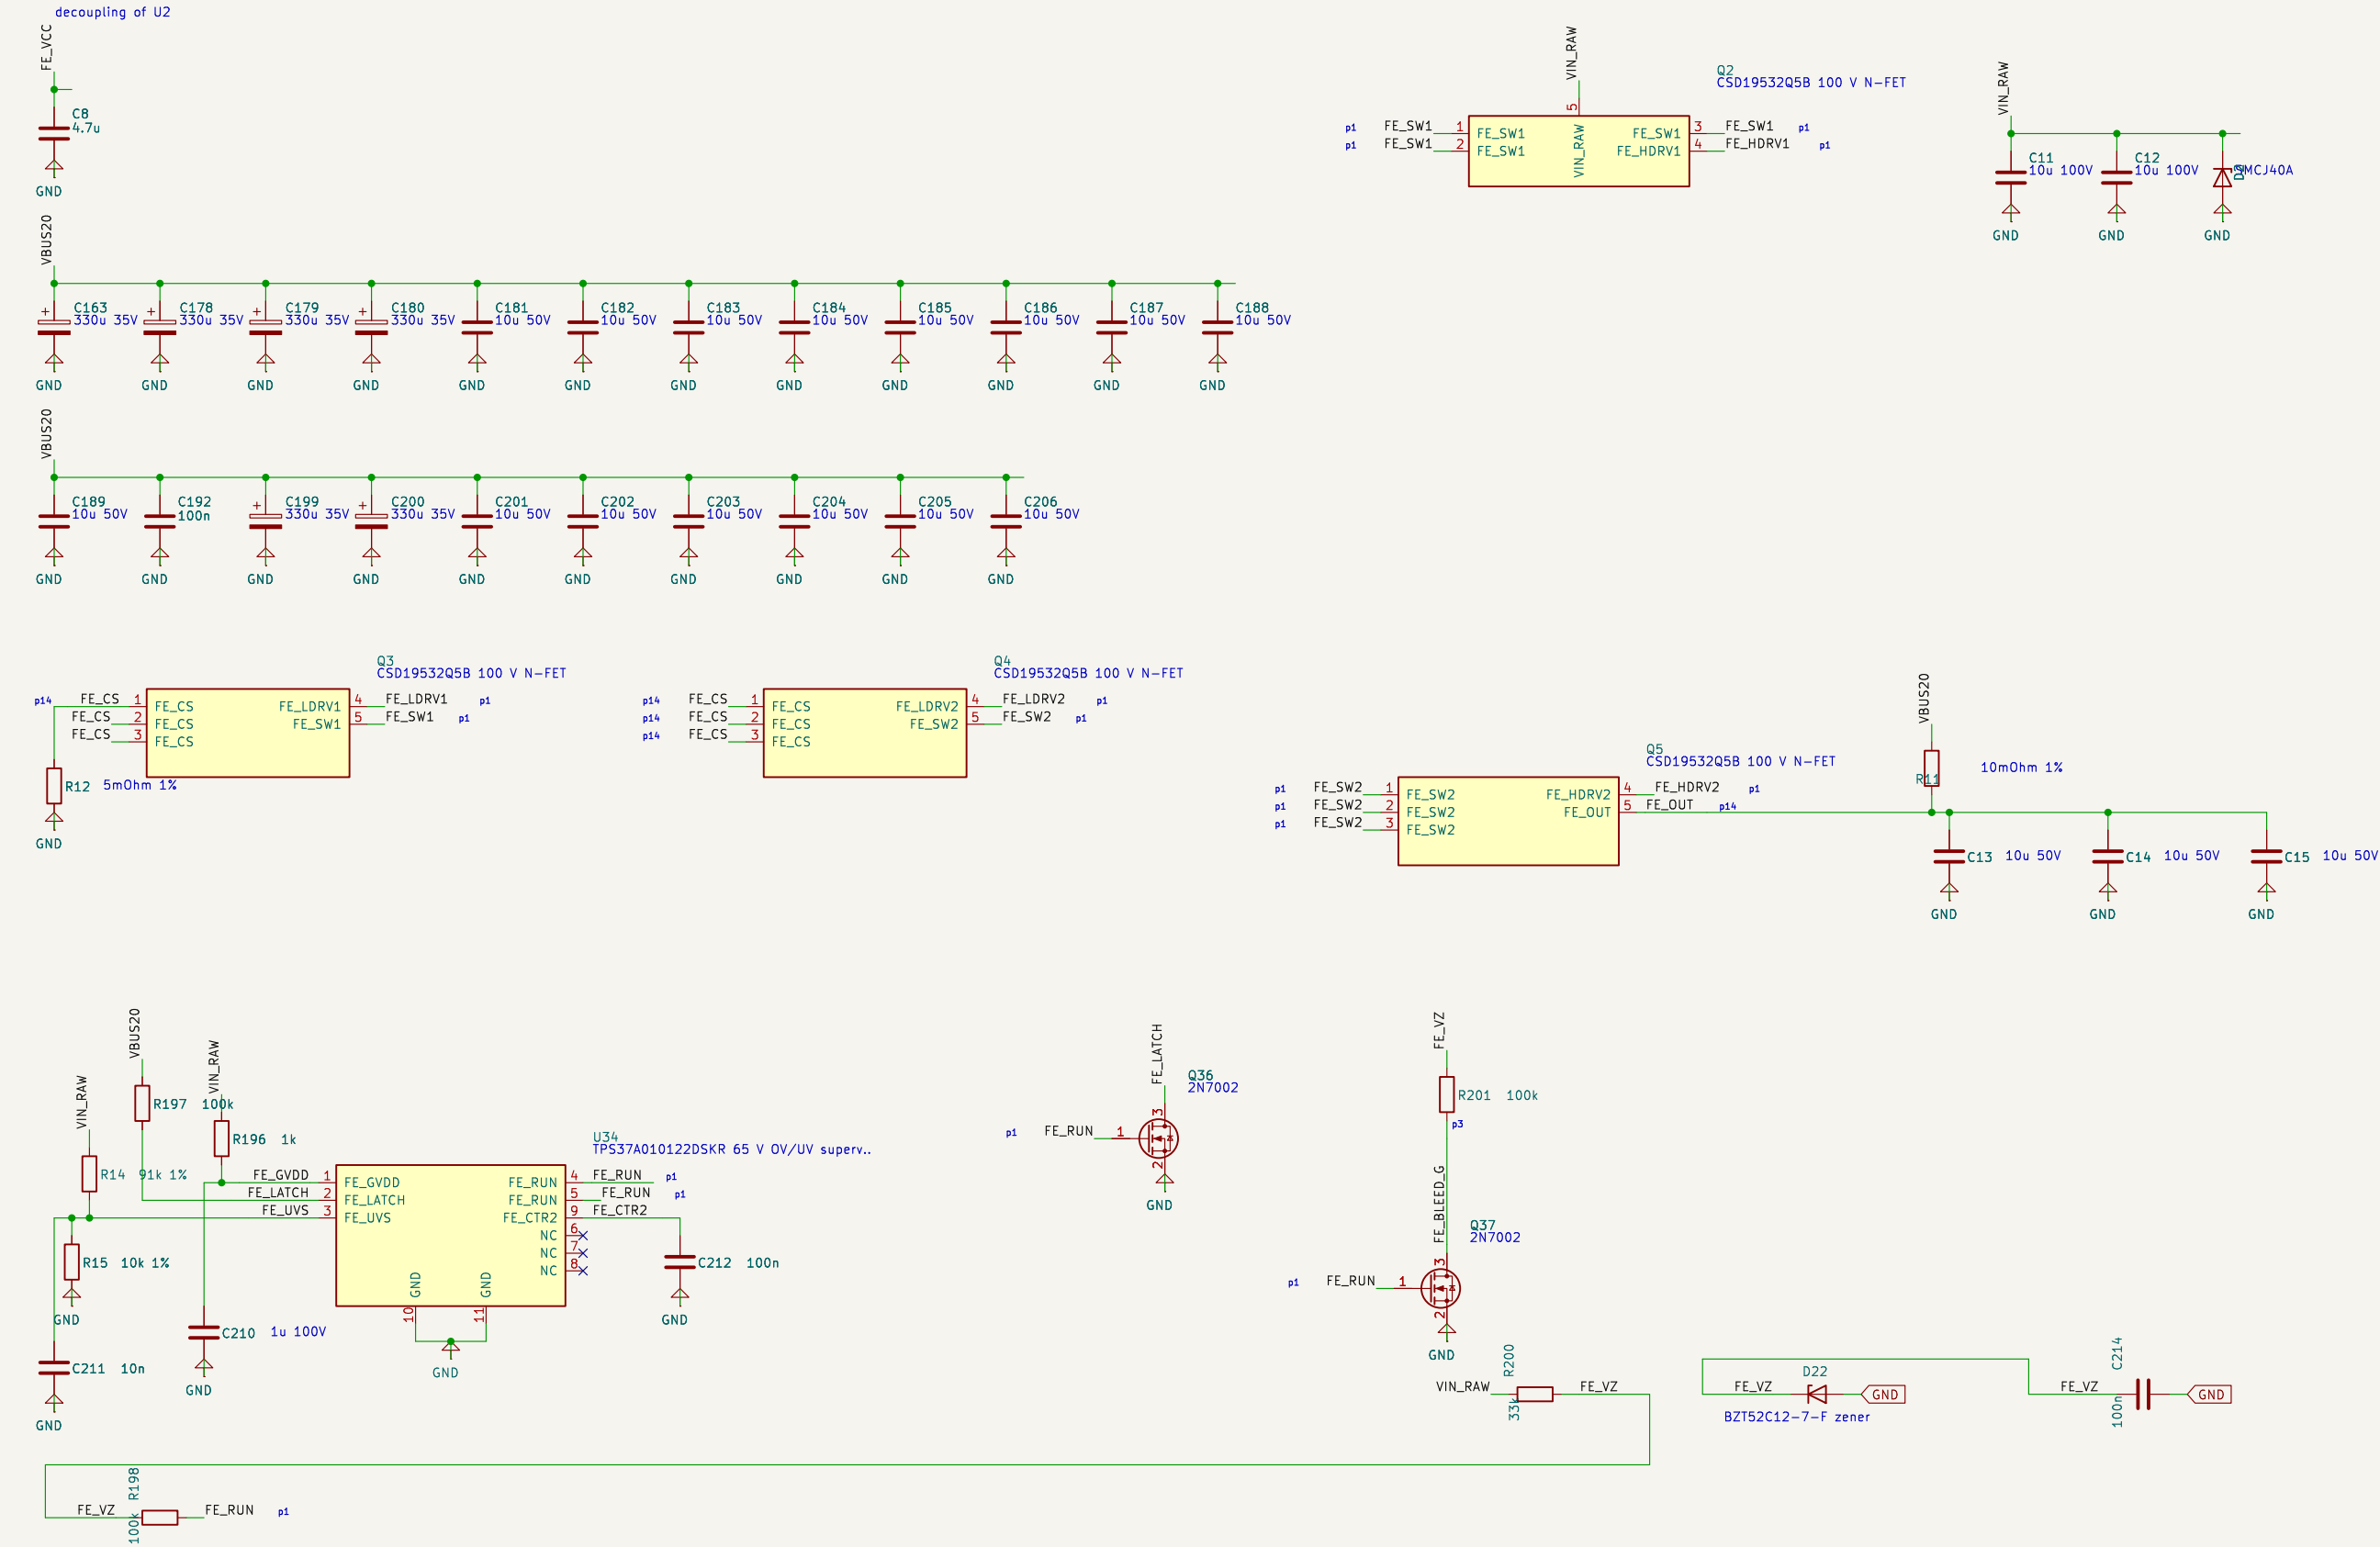


FRONT END: LM5176 FROM THE 9 TO 36 V INPUT TO THE 20 V CHARGE BUS (continued)

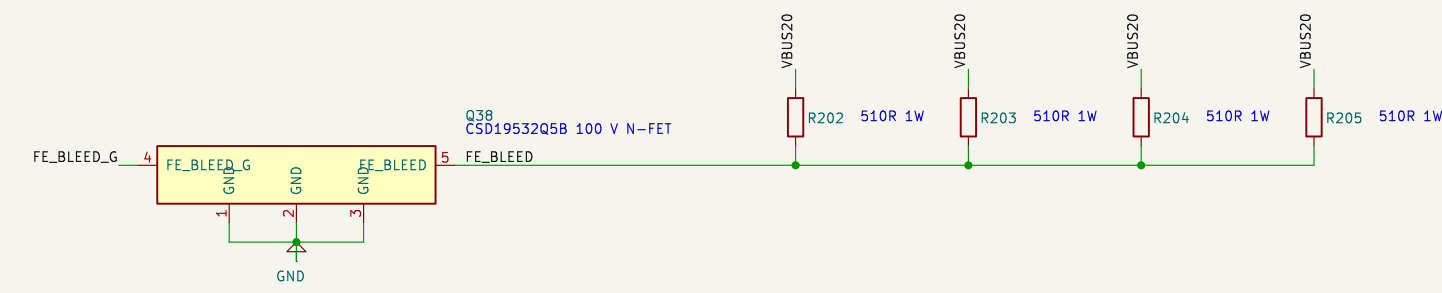


CHARGER BQ25731: 4S FROM THE 20 V BUS, SYSTEM ON VSYS (VBAT), PACK BEYOND RSR, I2C 0x6B

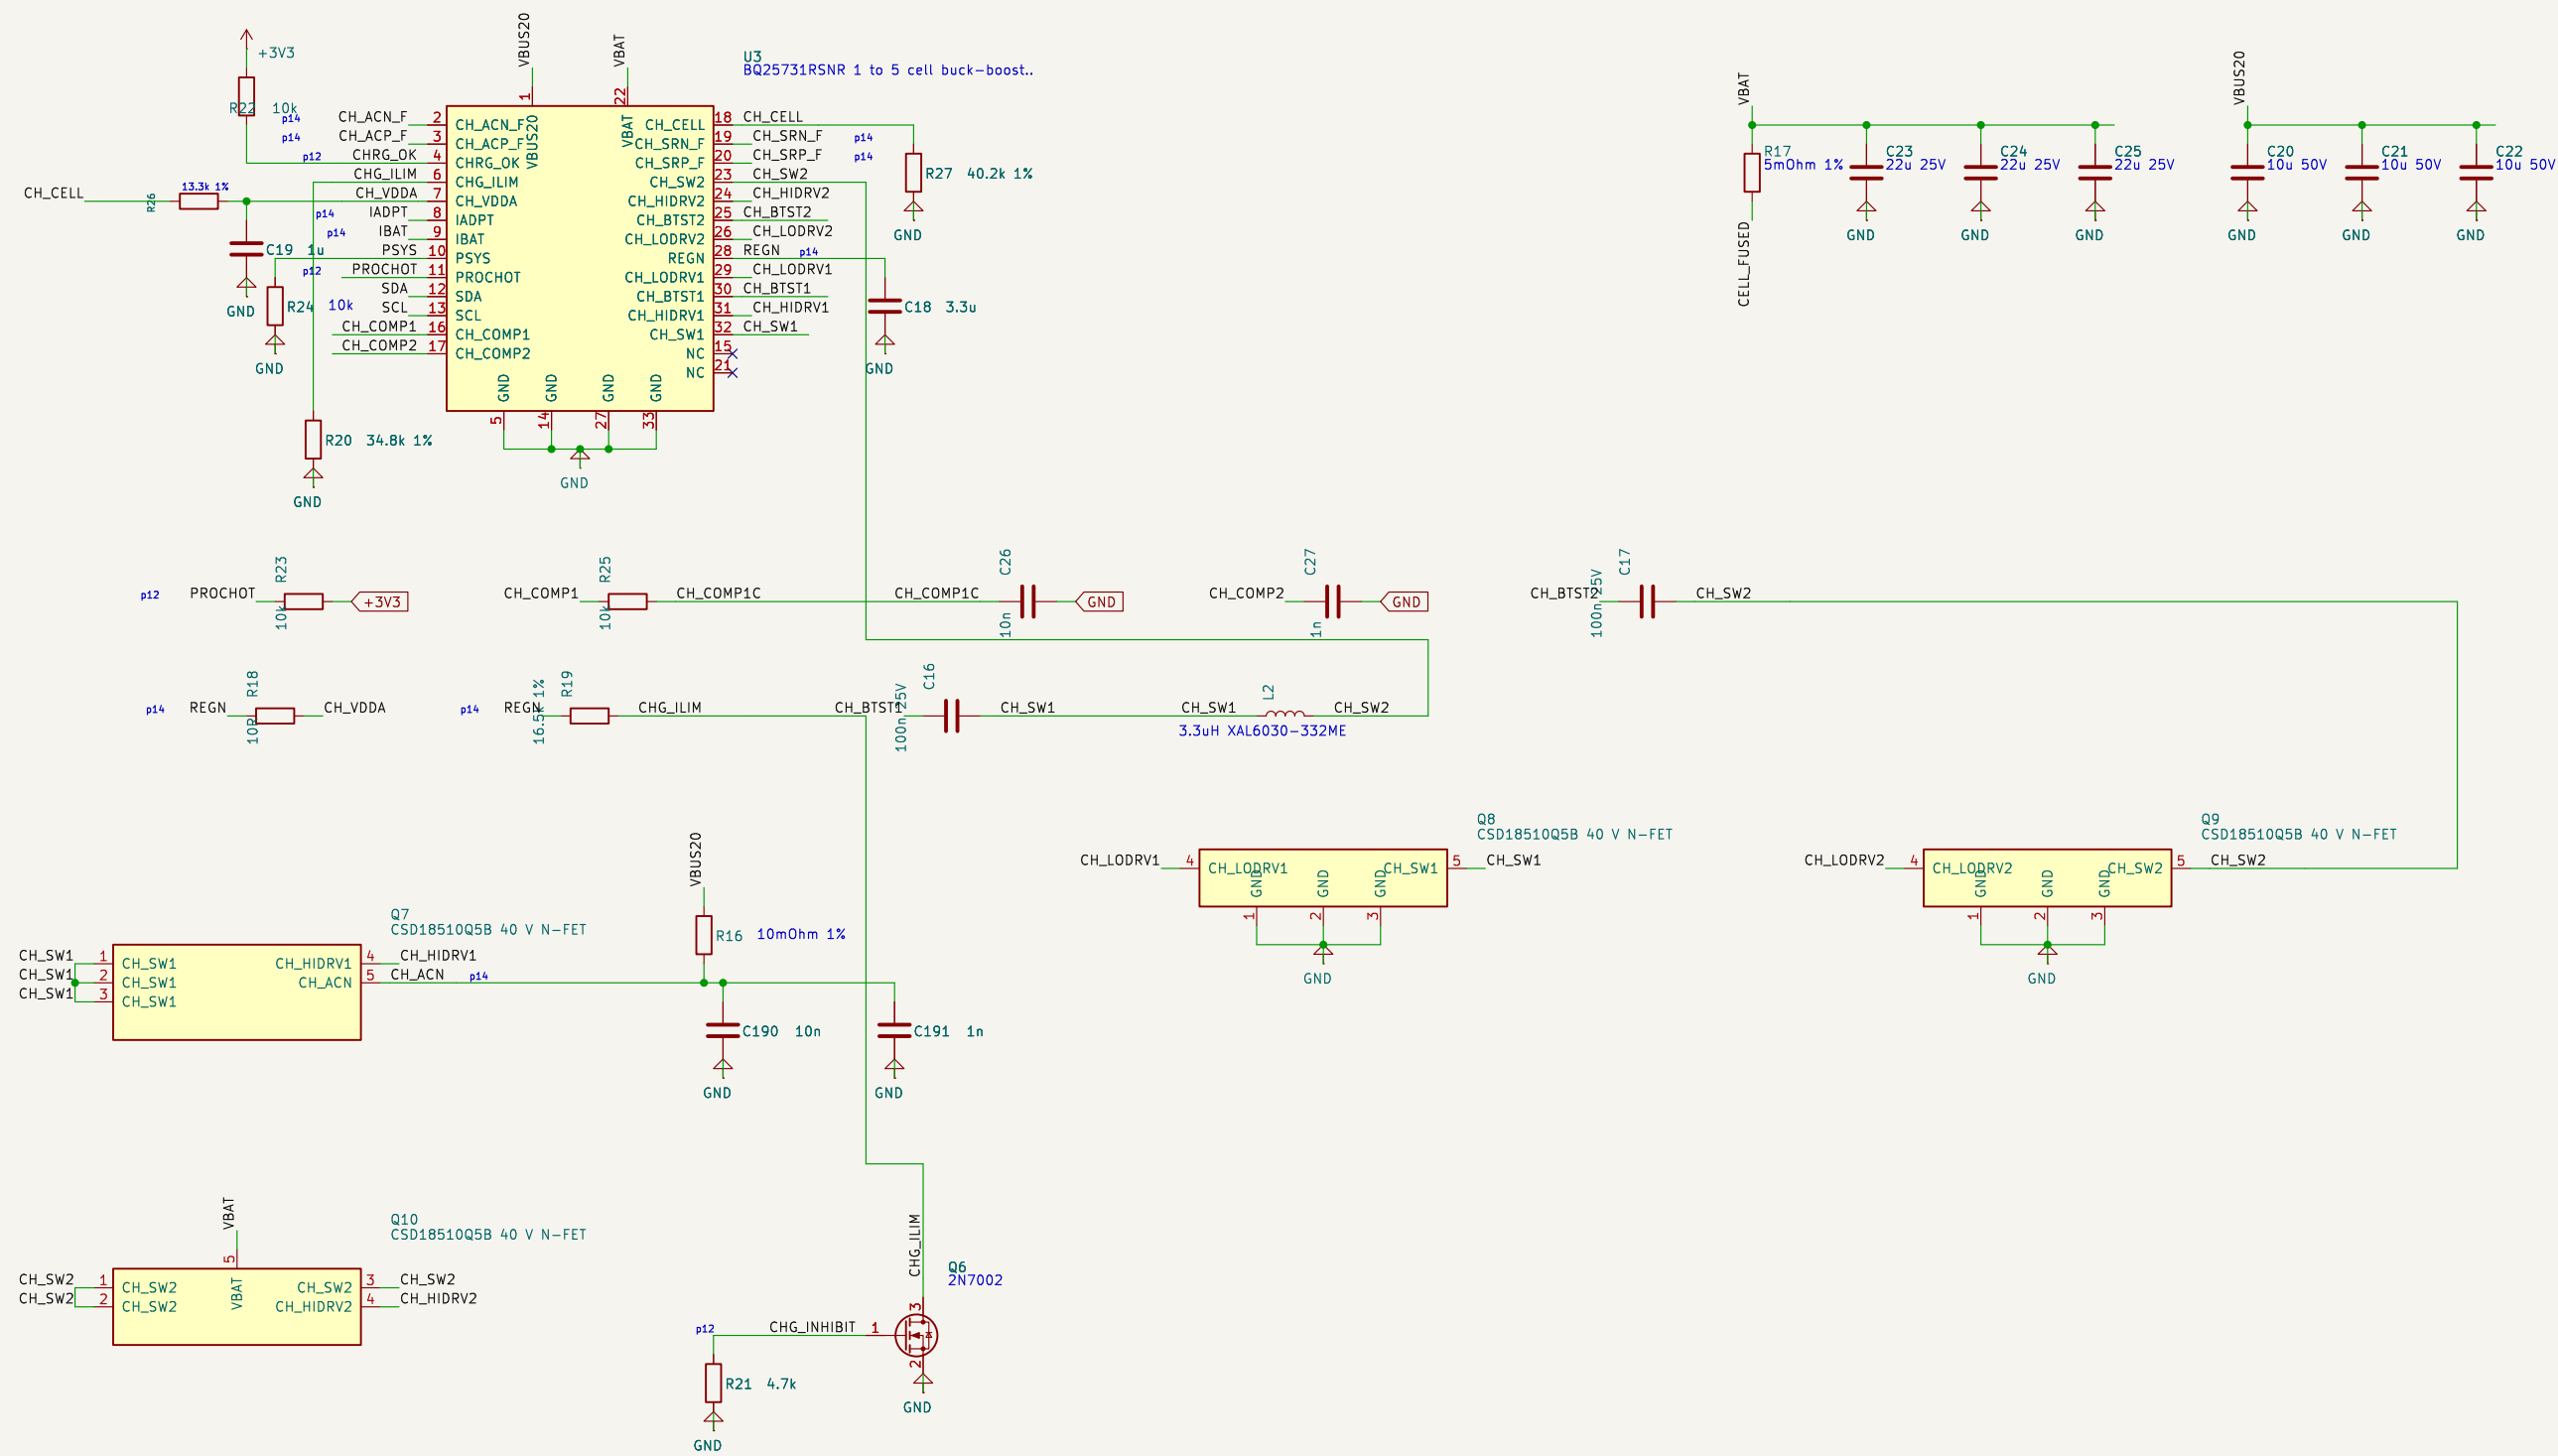


SLOT RAIL S1: AP64500 5.1 V + INA226 0x40

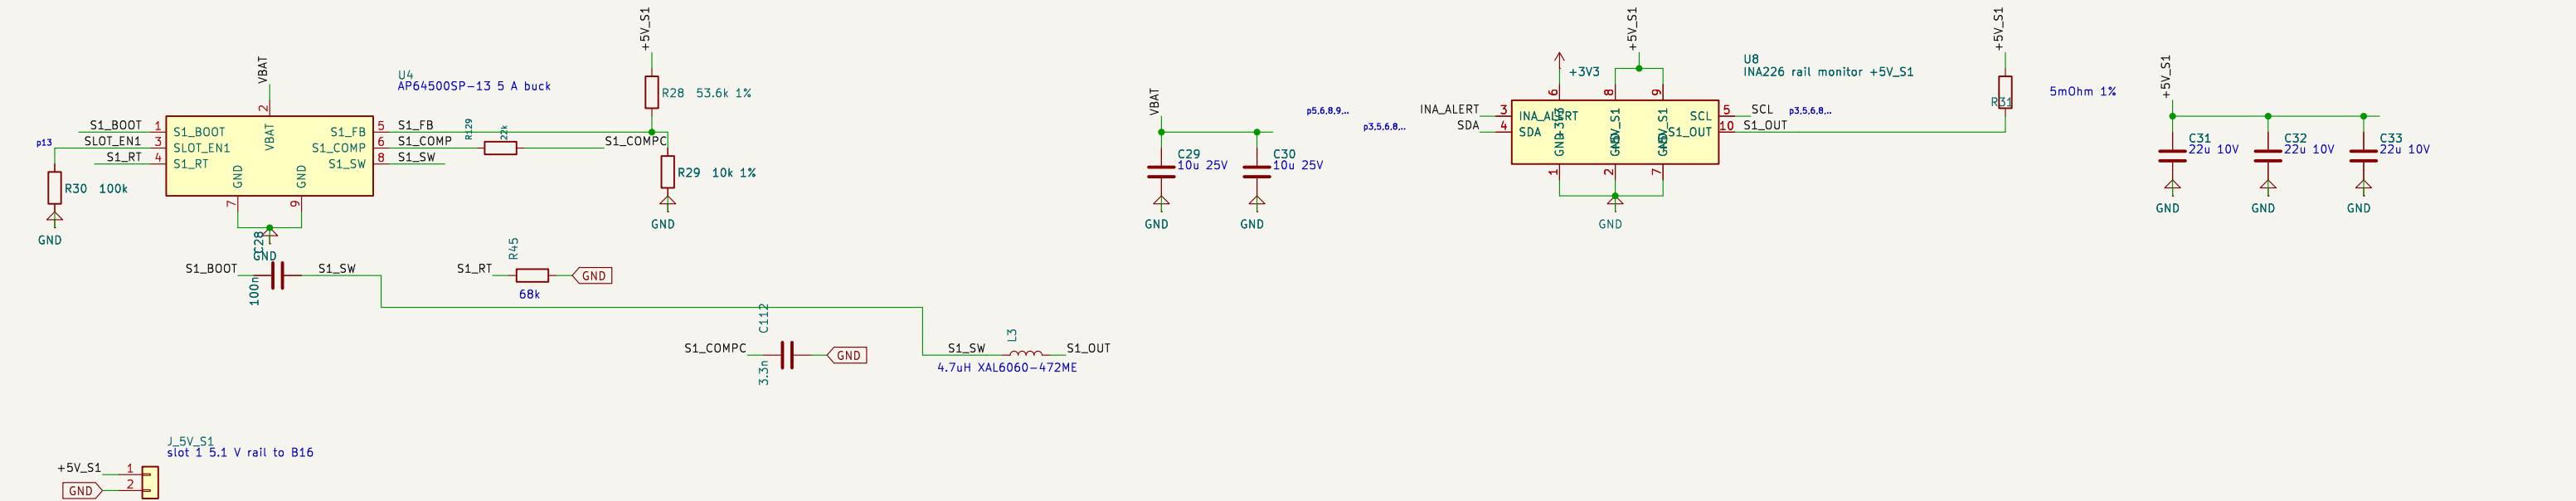


SLOT RAIL S2: LM5176 5.1 V (7.2 A MINIMUM LIMIT) + INA226 0x41

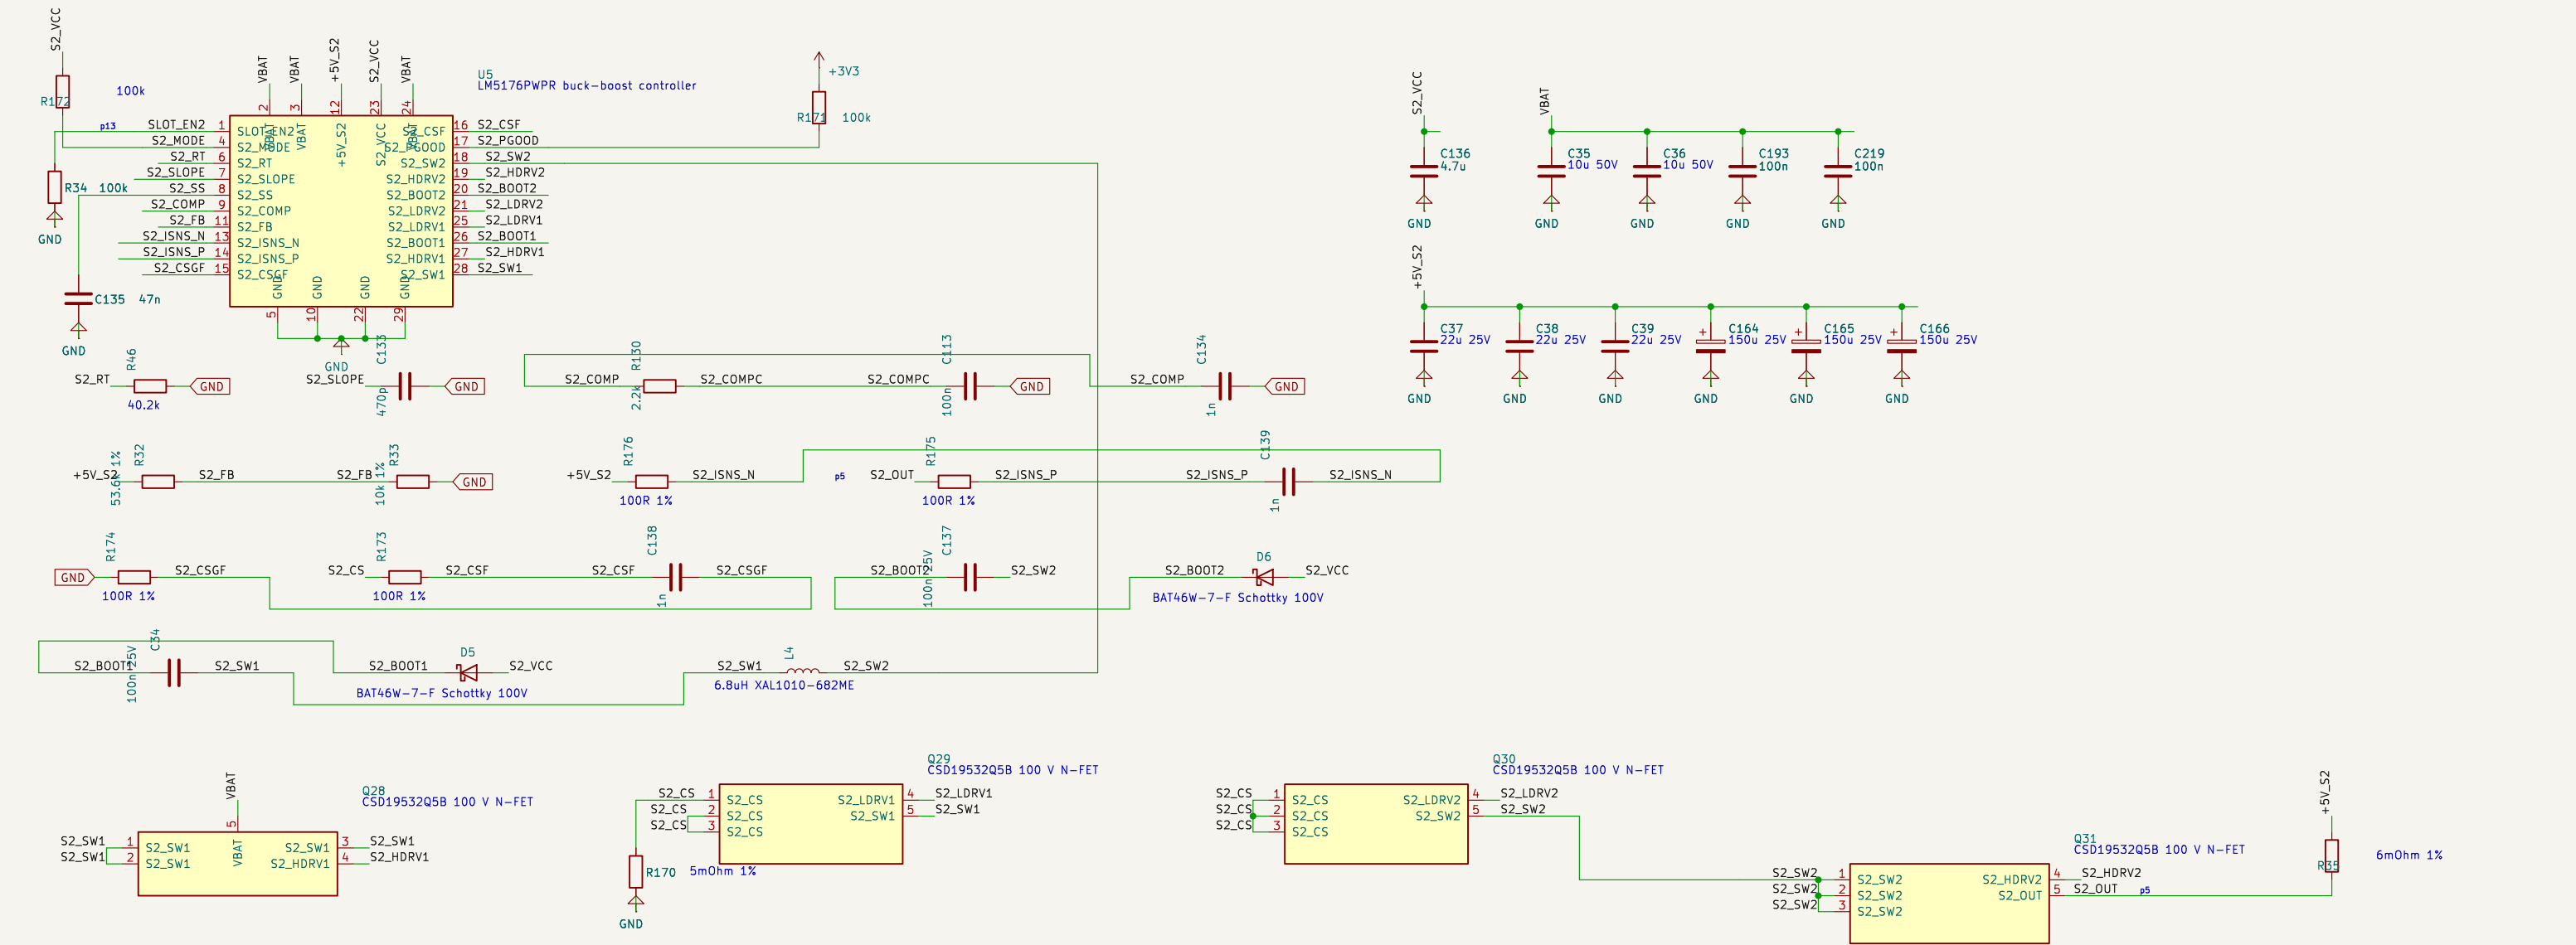



SLOT RAIL S2: LM5176 5.1 V (7.2 A MINIMUM LIMIT) + INA226 0x41 (continued)

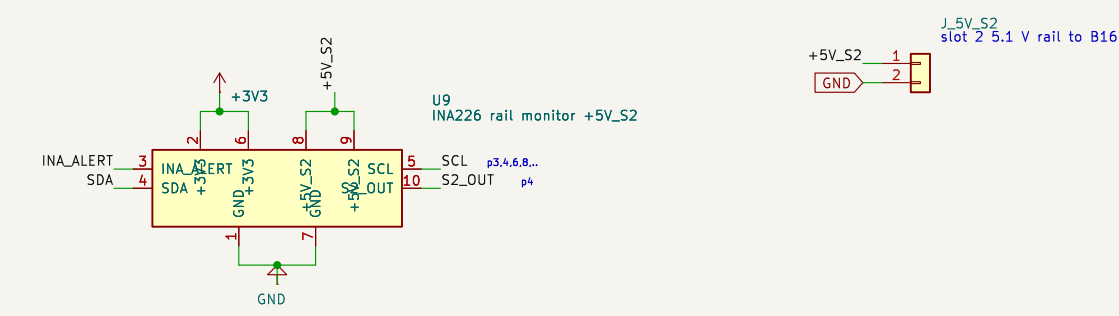


SLOT RAIL S3: AP64500 5.1 V + INA226 0x44

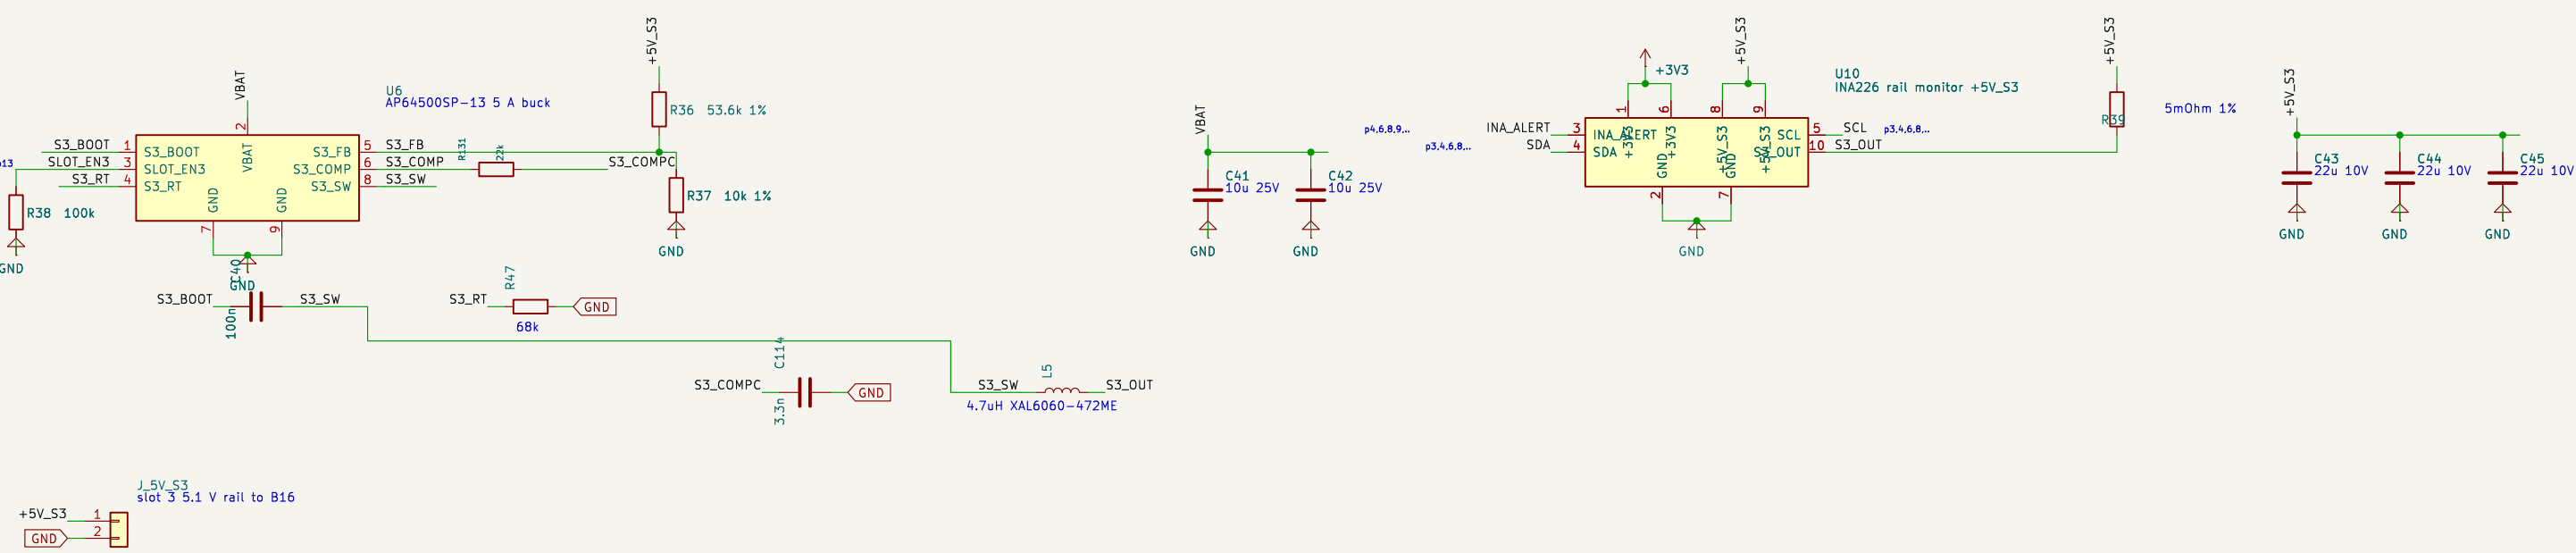

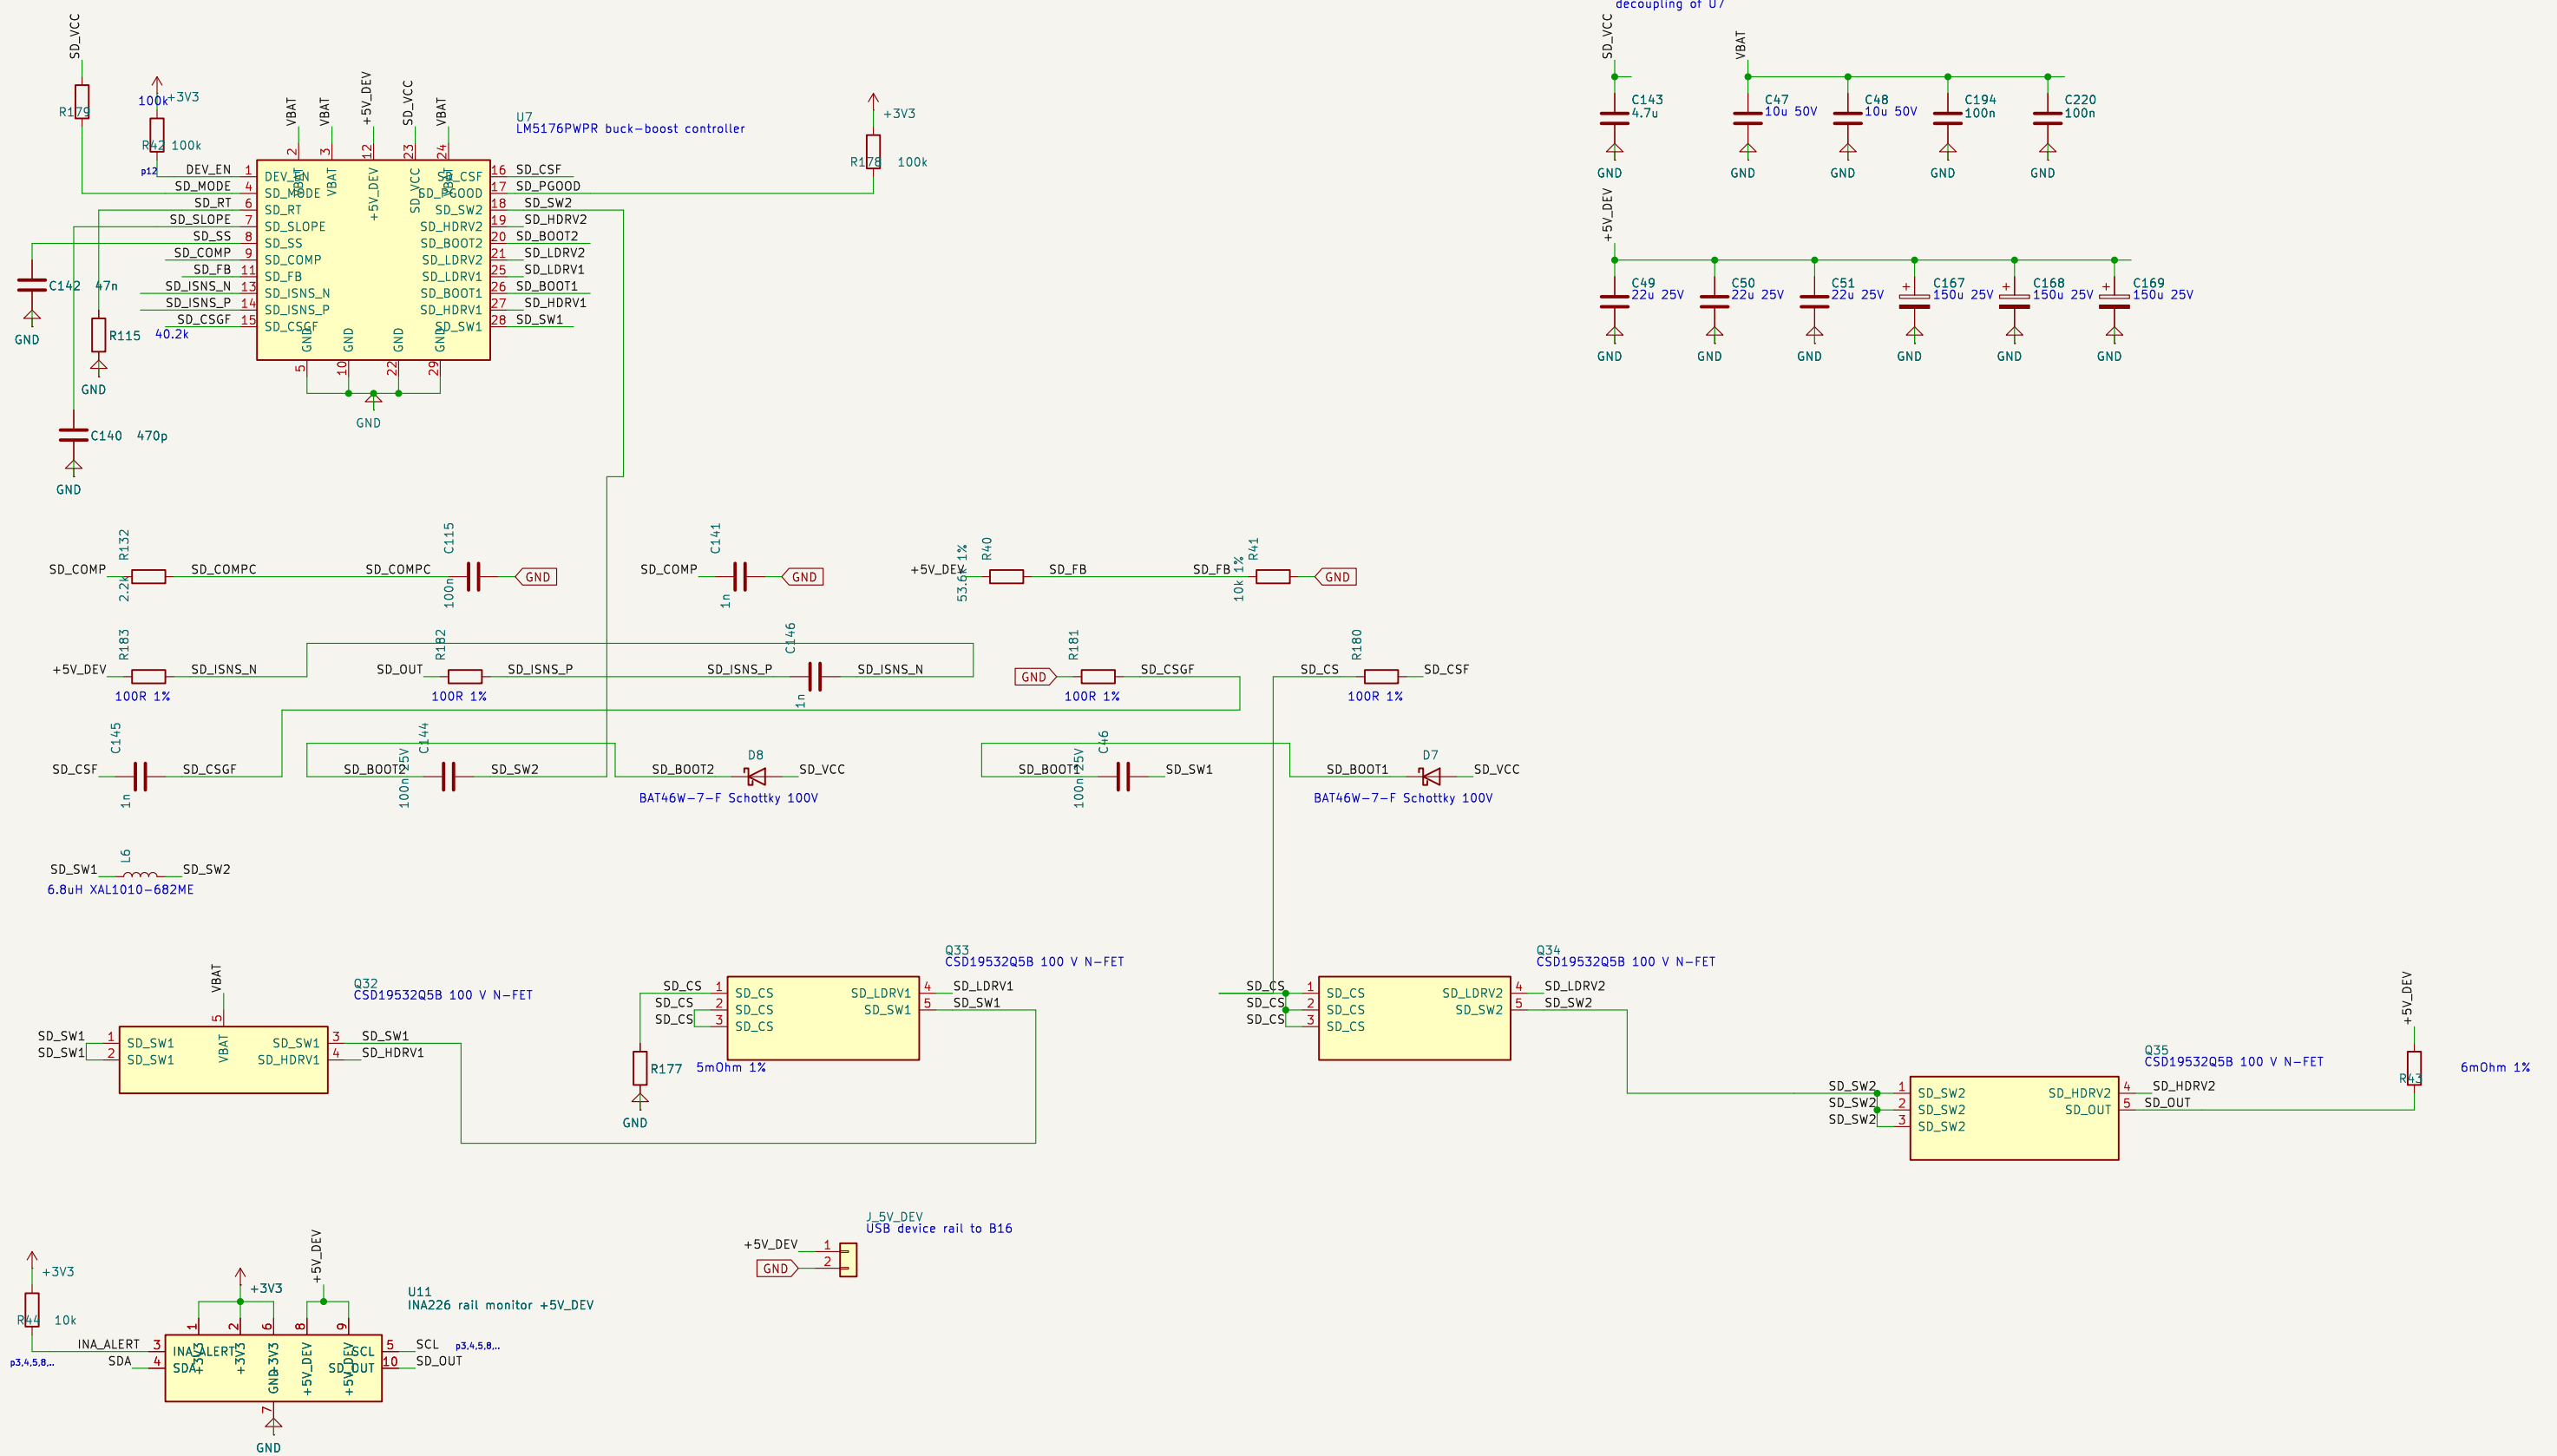





PA RAIL: LM5176 13.8 V 6 A, EMCON GATED, INA226 0x46 (continued)

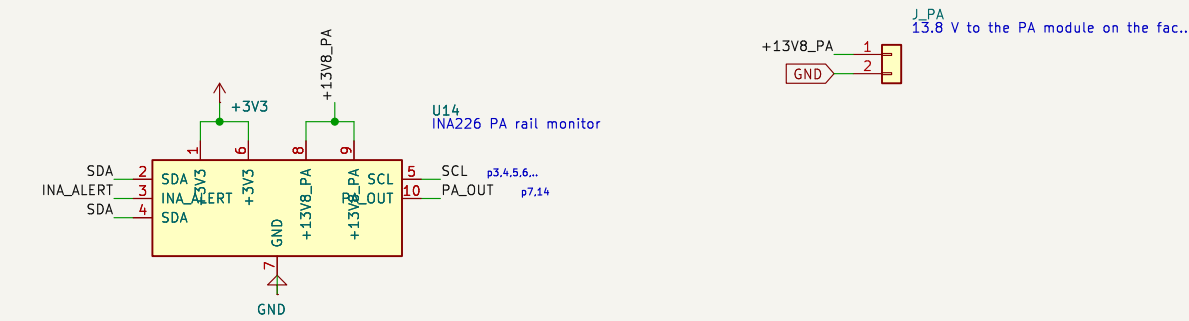


HF RAIL: LM5176 12.0 V 2 A, EMCON GATED

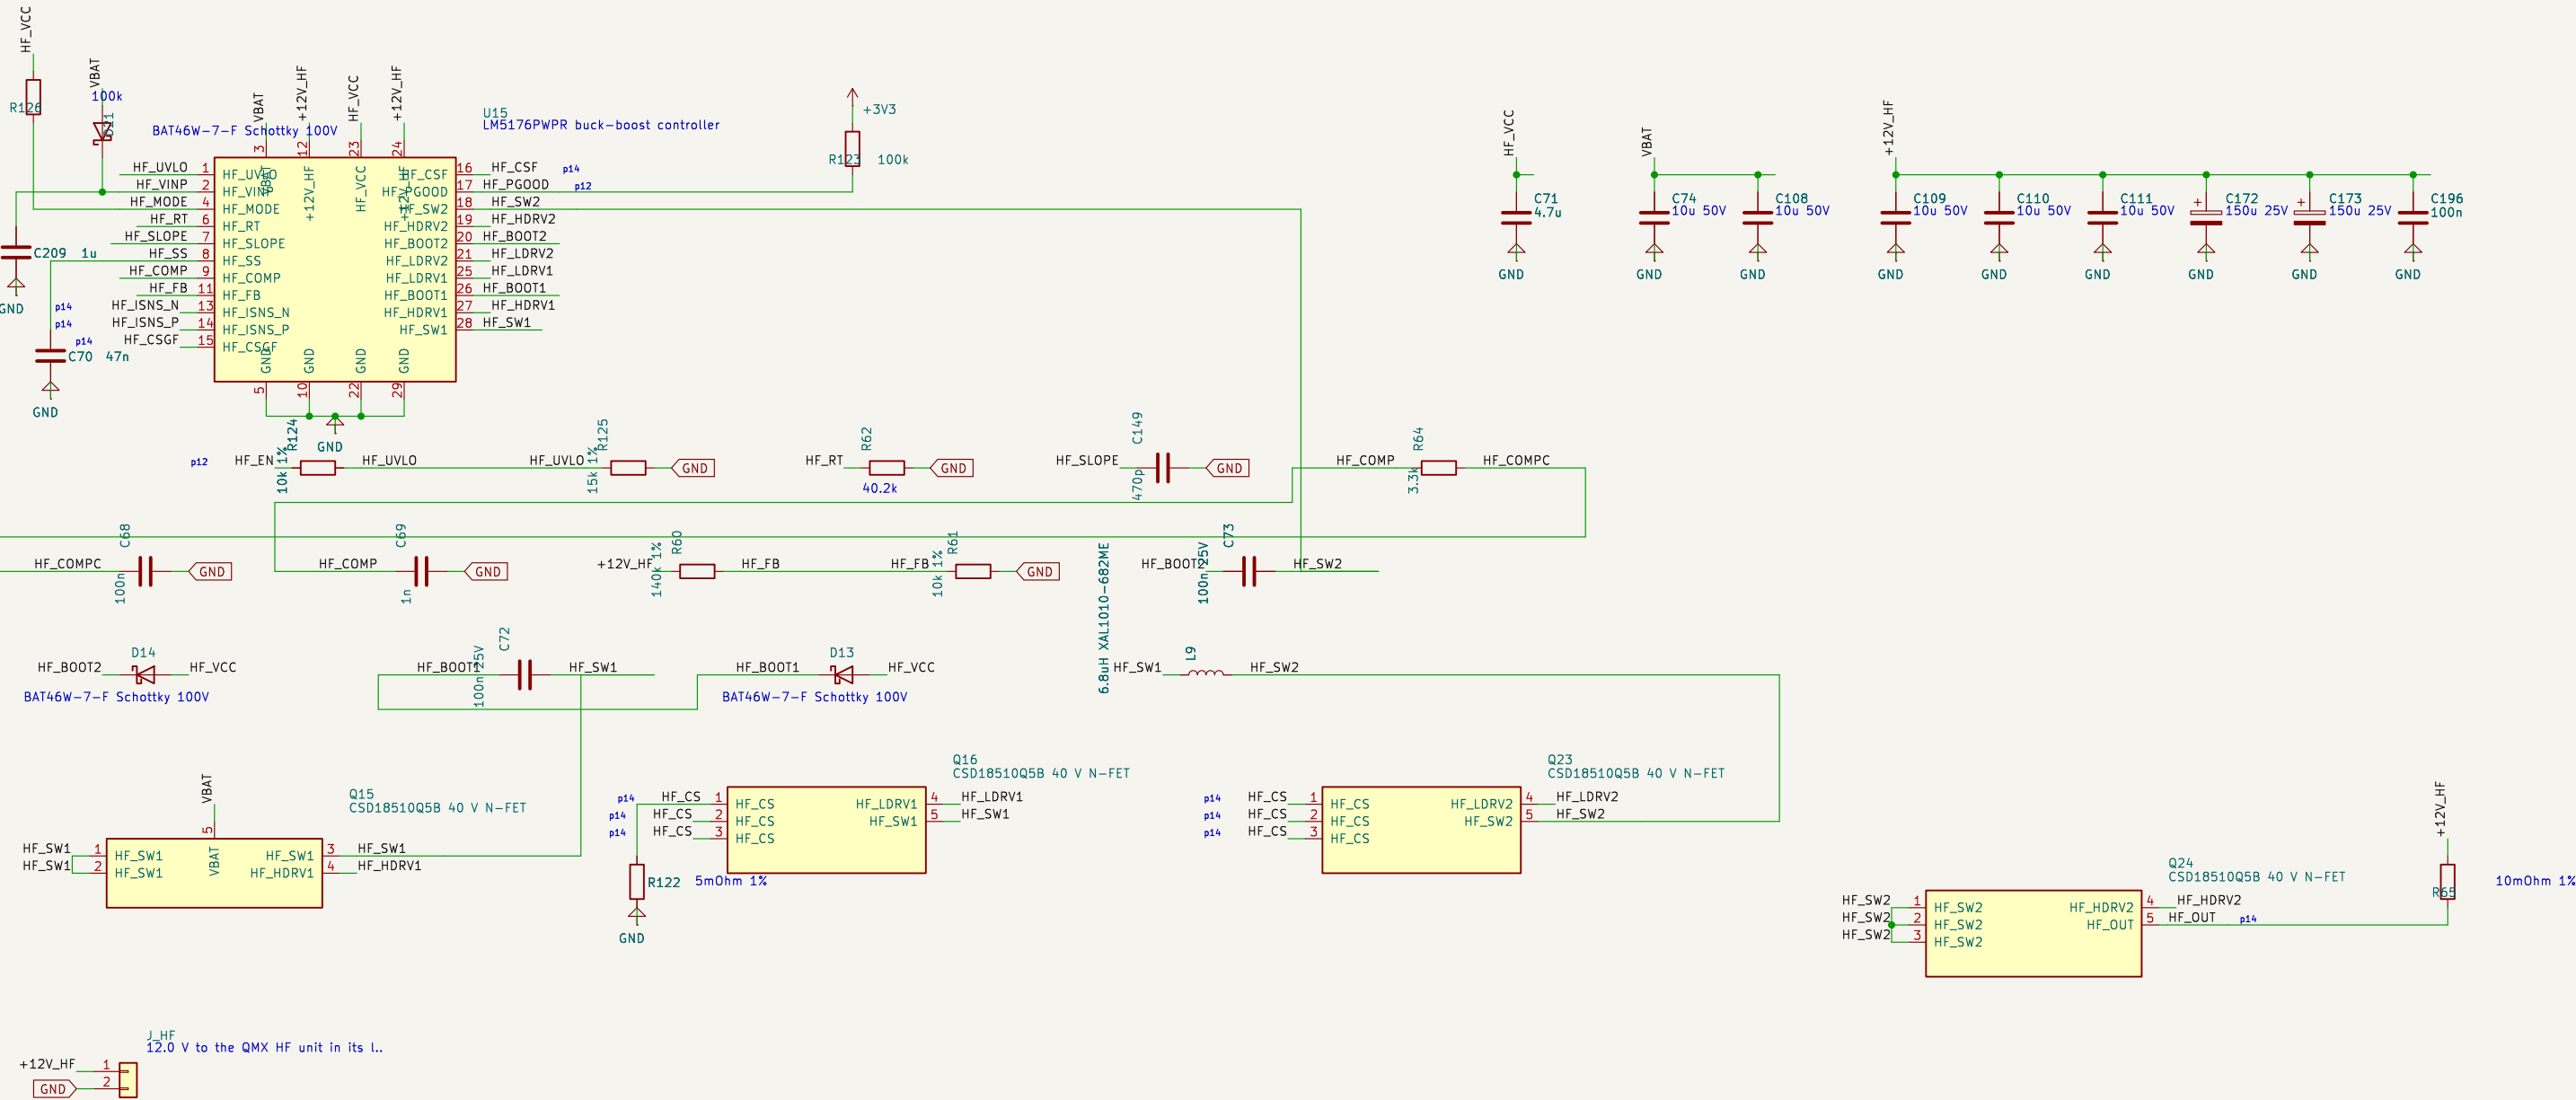


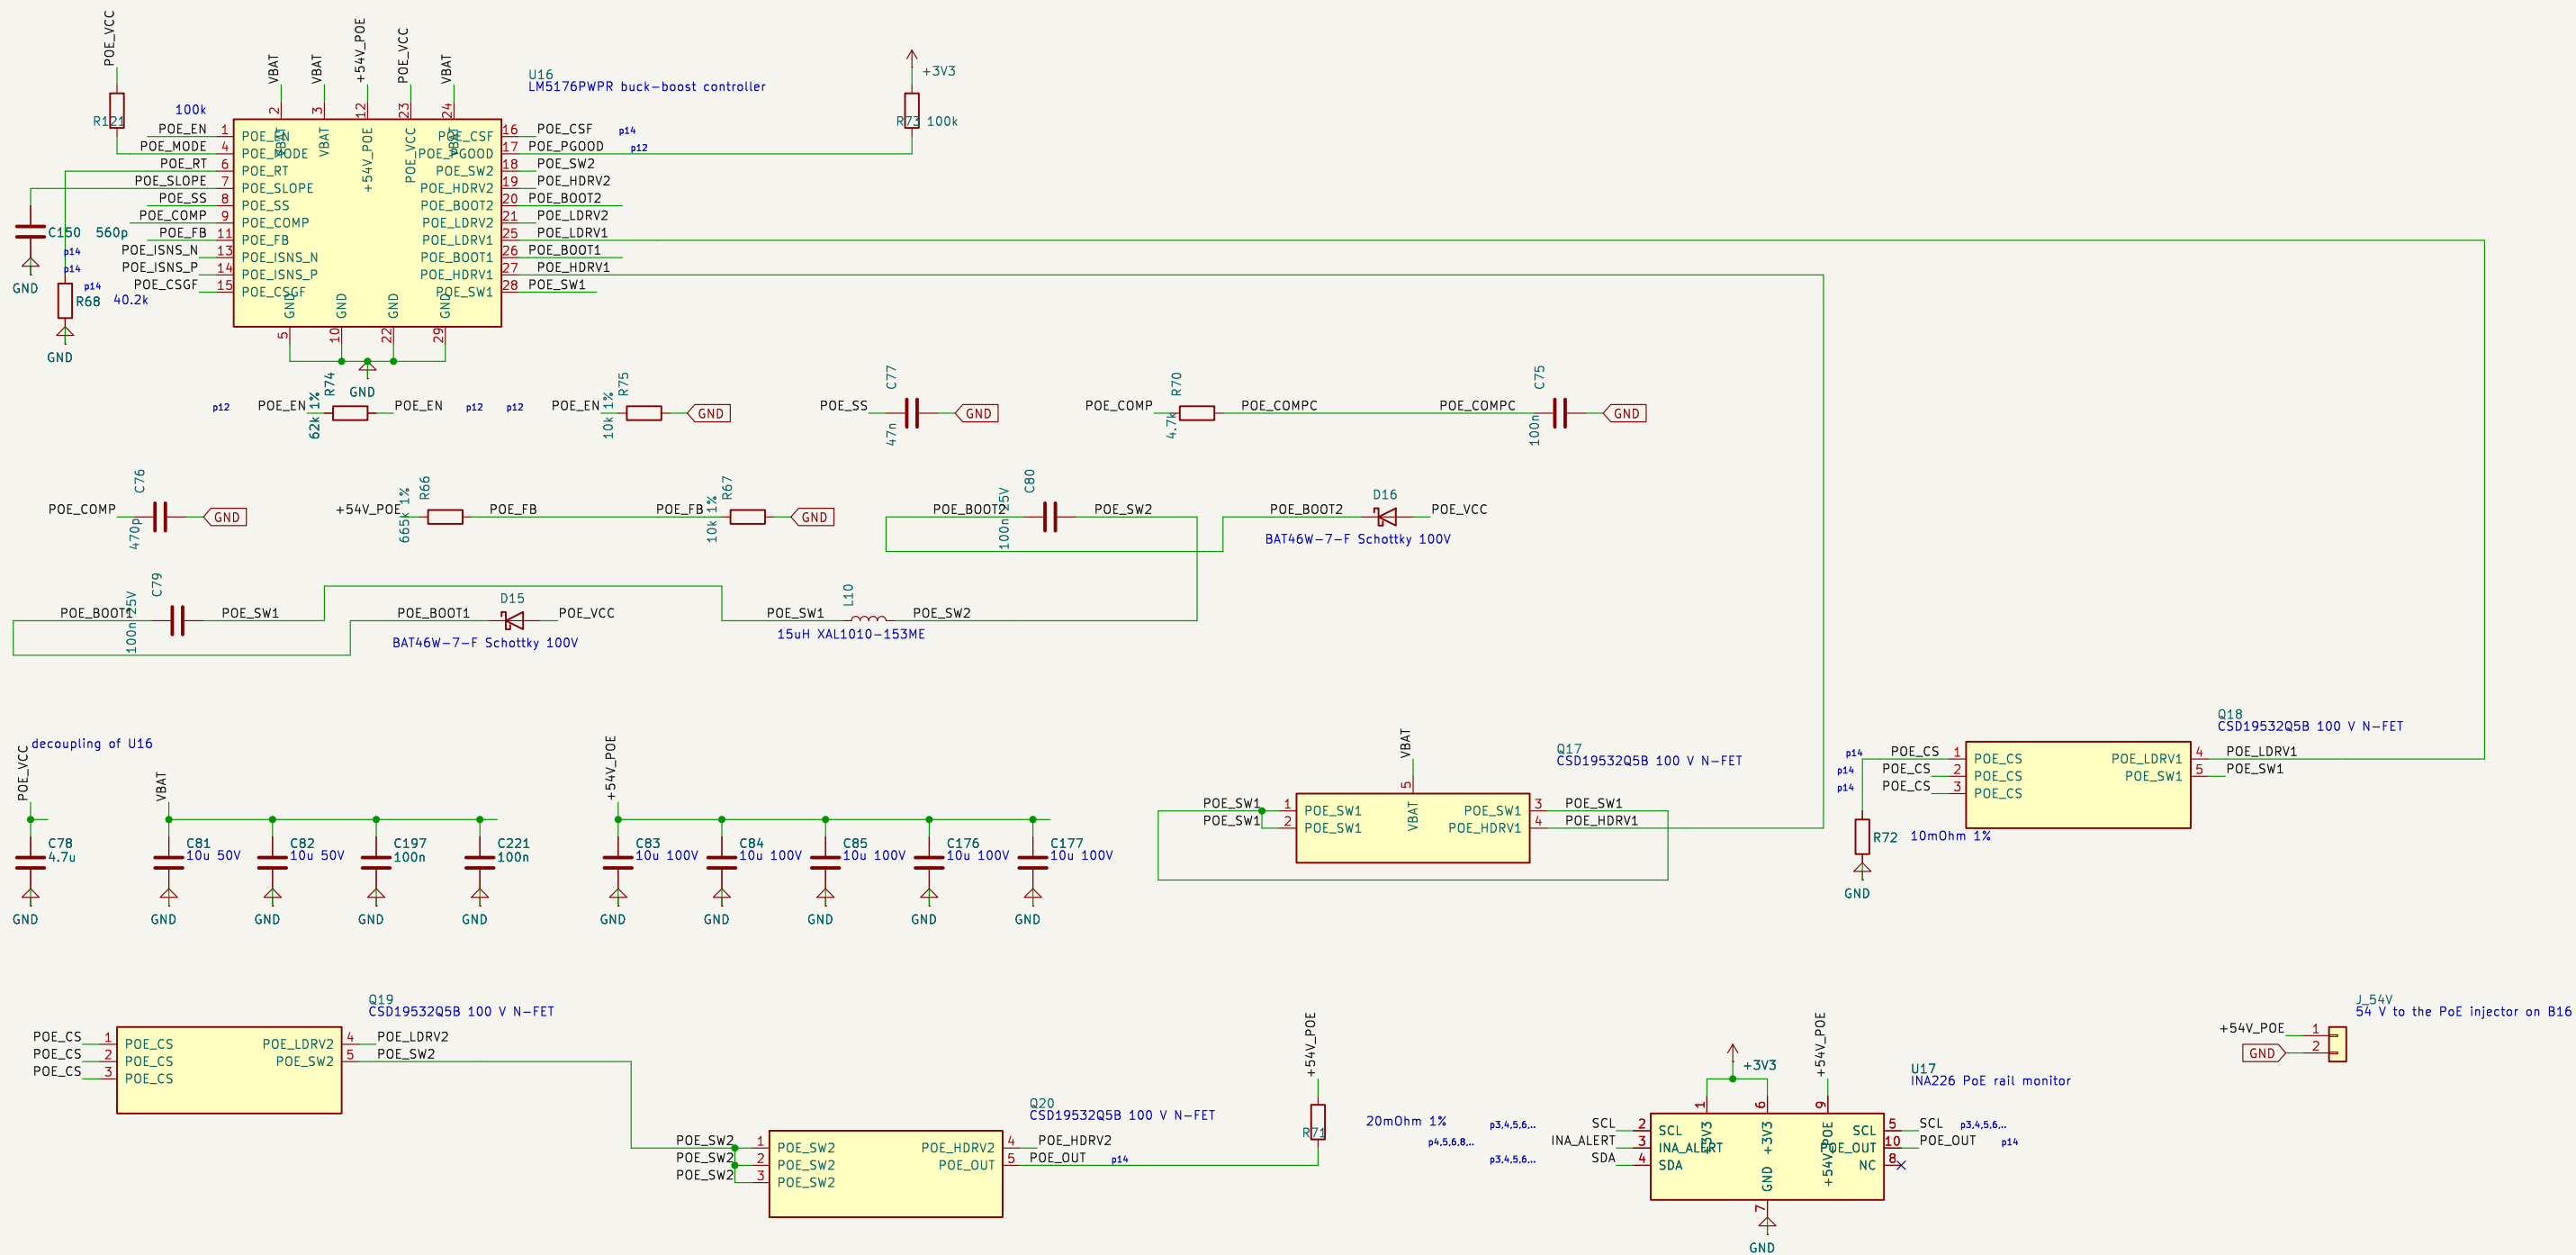


USB-C PD OUTLET: TPS25740A + LM5176 5/9/15 V STAGE

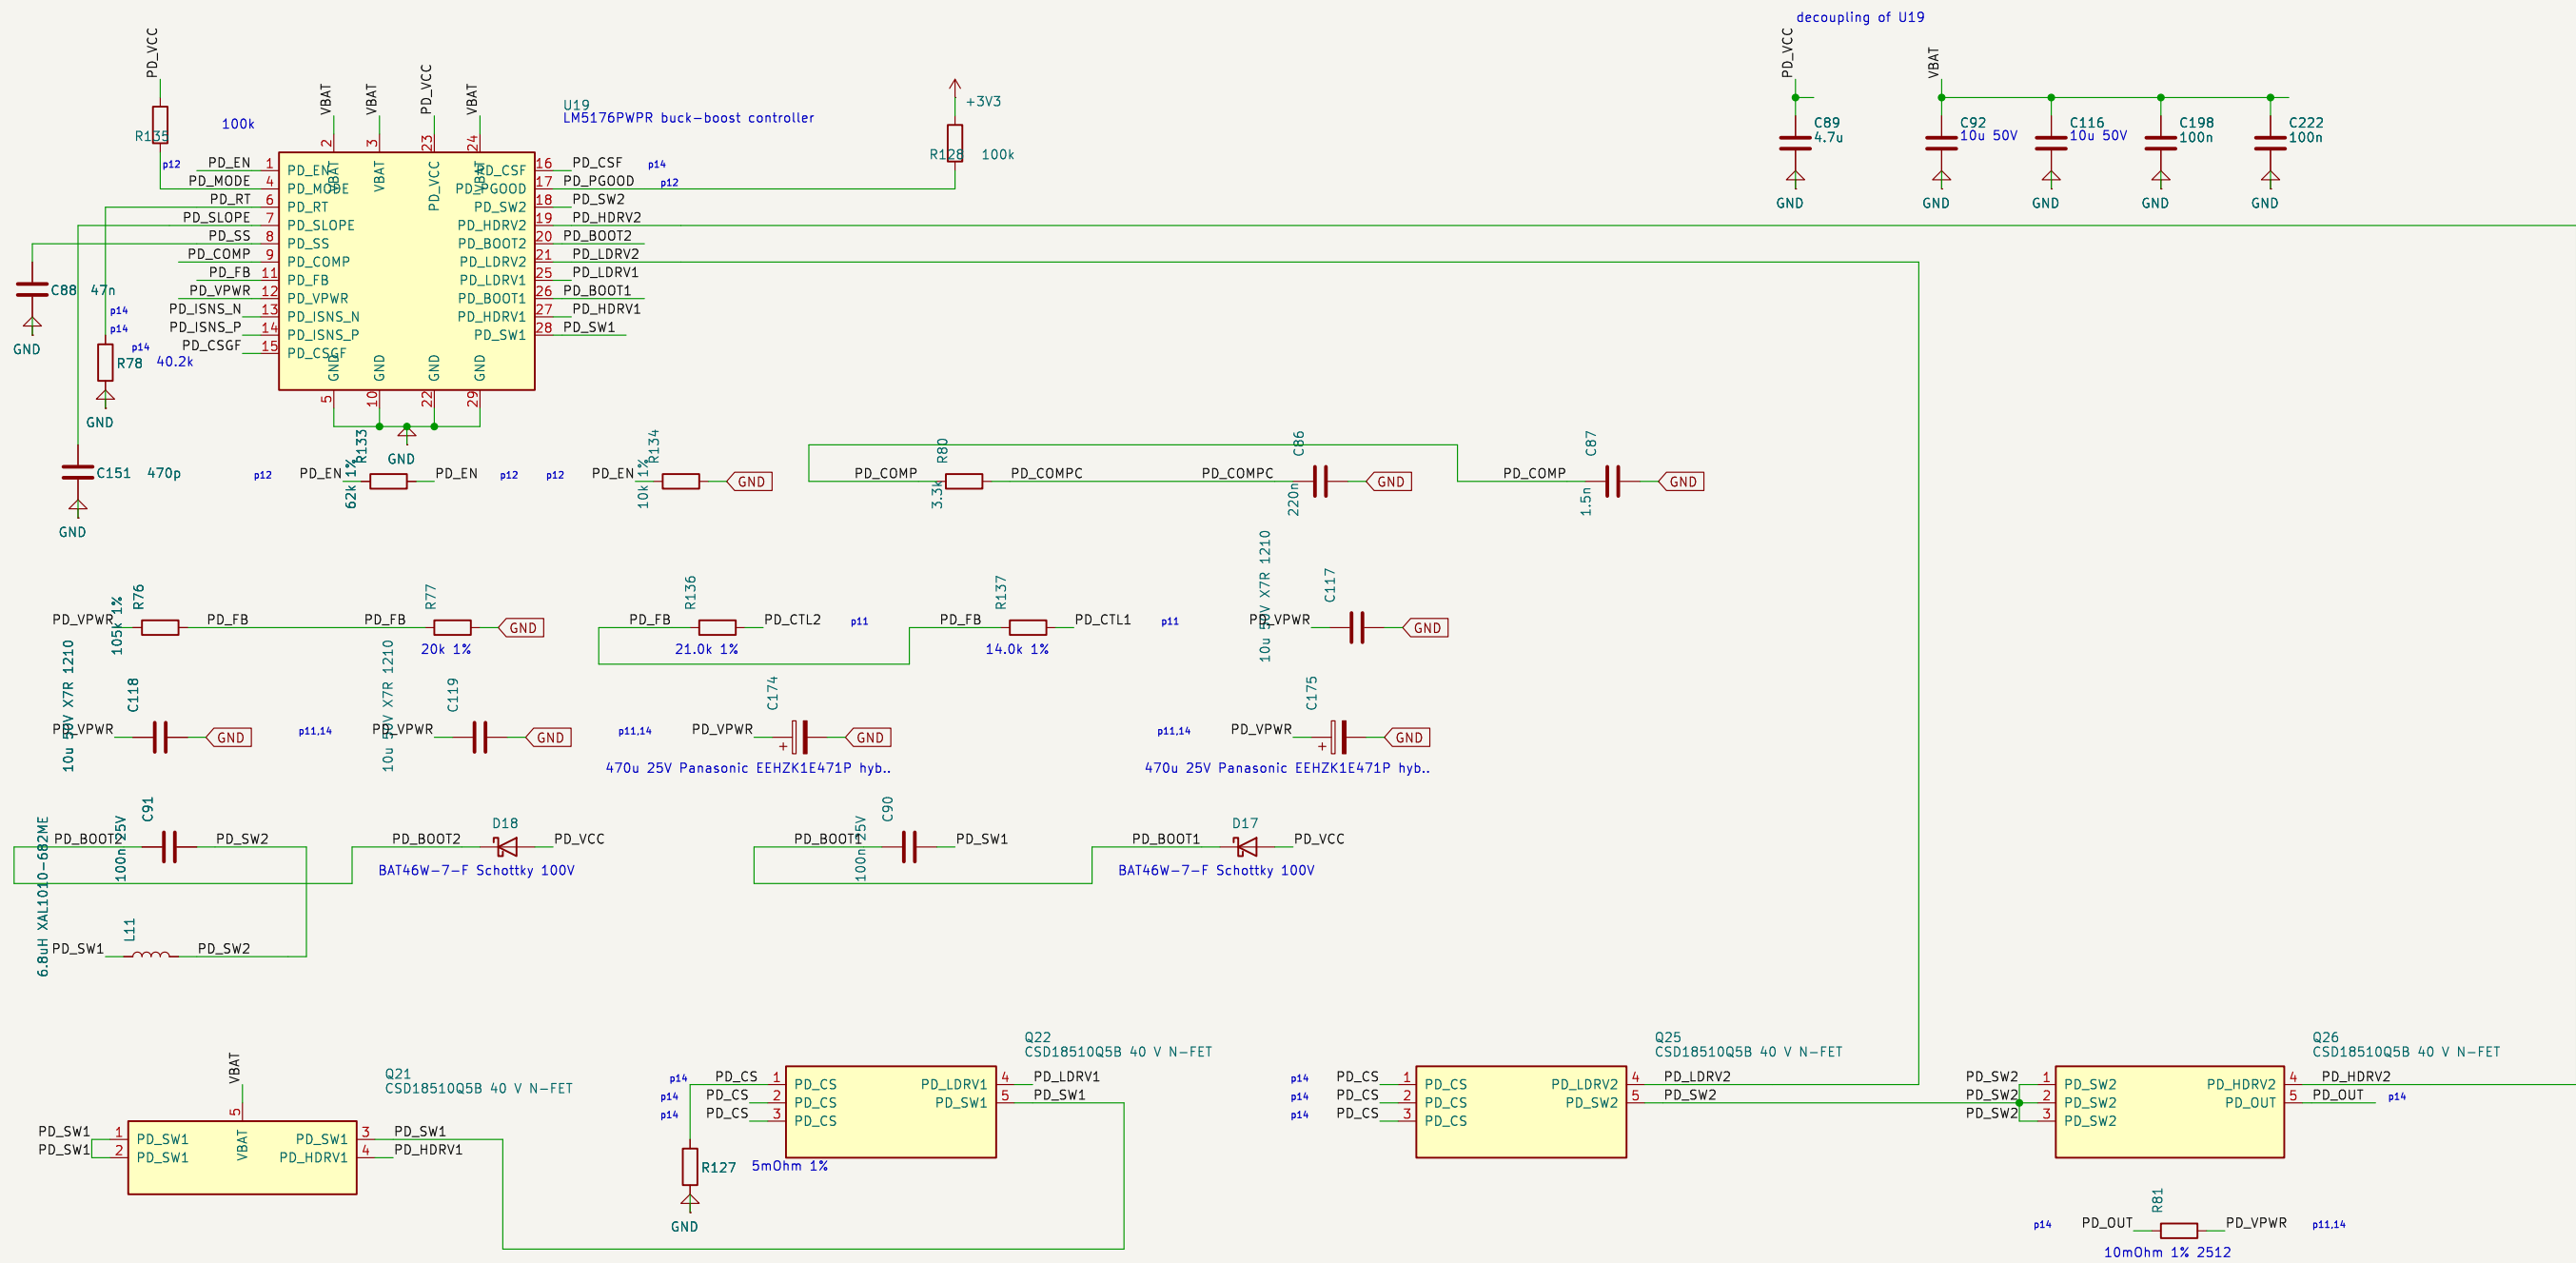


USB-C PD OUTLET: TPS25740A + LM5176 5/9/15 V STAGE (continued)

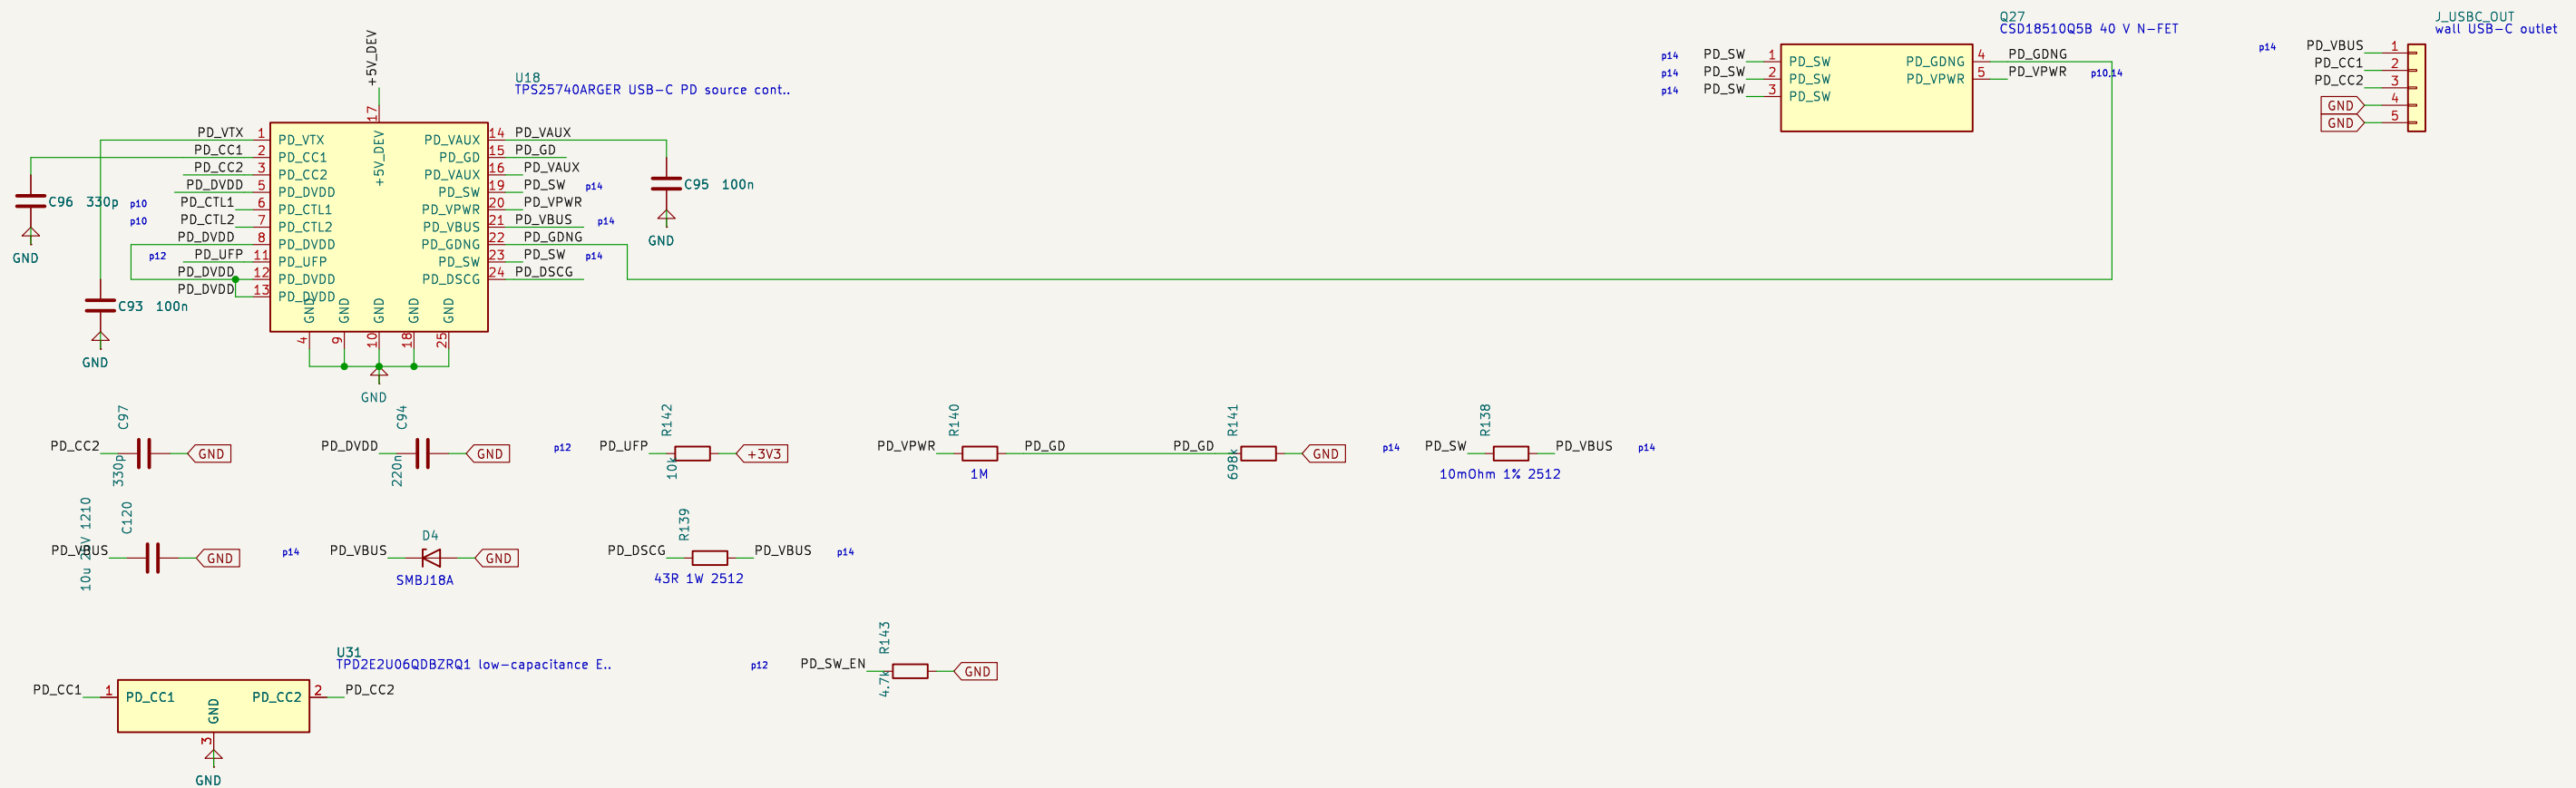


EFUSES: MONITOR, HEATER (12.0 V BUCK), D8 5 V



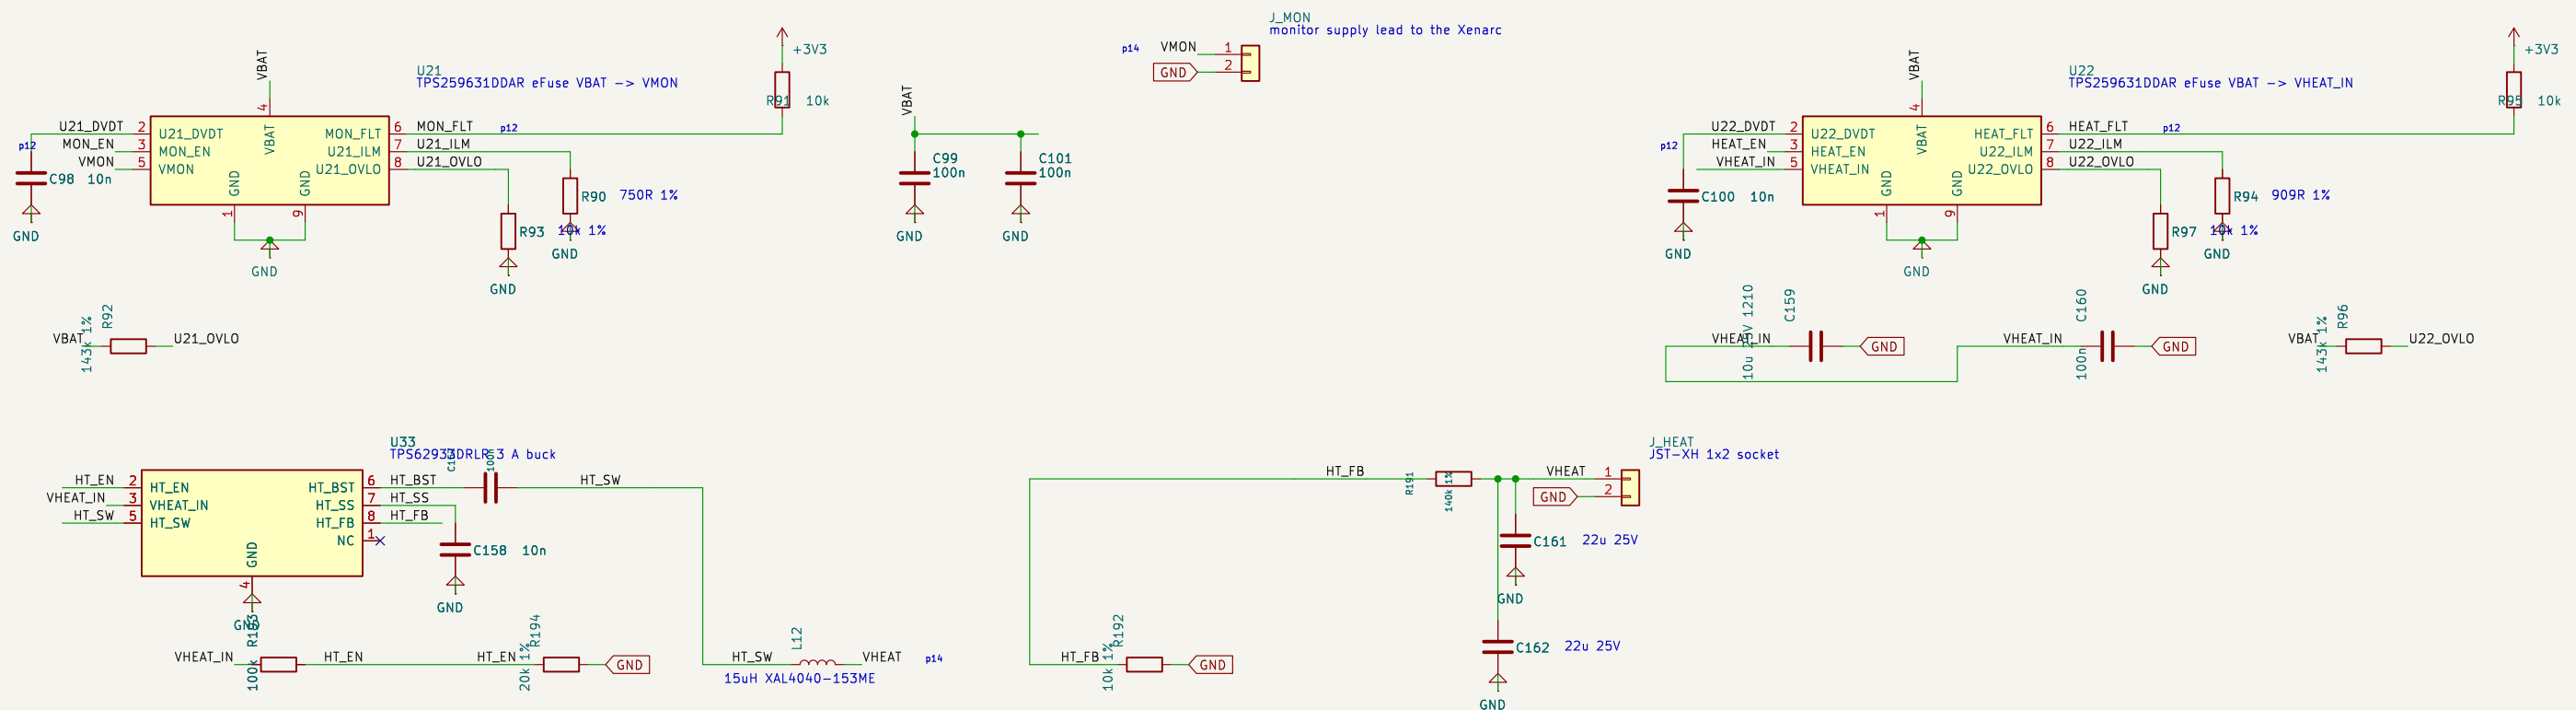


EFUSES: MONITOR, HEATER (12.0 V BUCK), D8 5 V (continued)

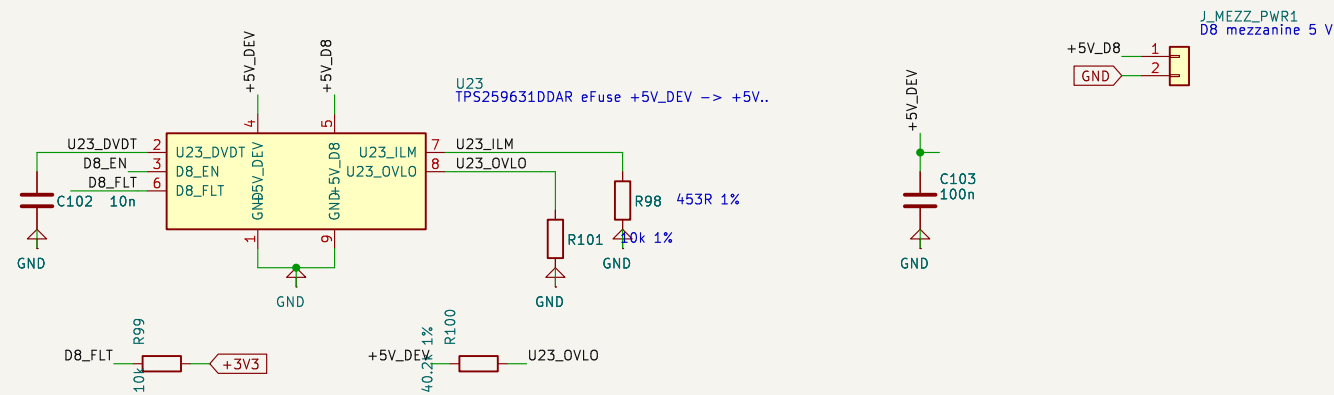


EMCON GATES 74AUP1G08 (BOTH LINES), OUTLET INTERLOCK 74LVC08, EXPANDERS 0x21 0x24

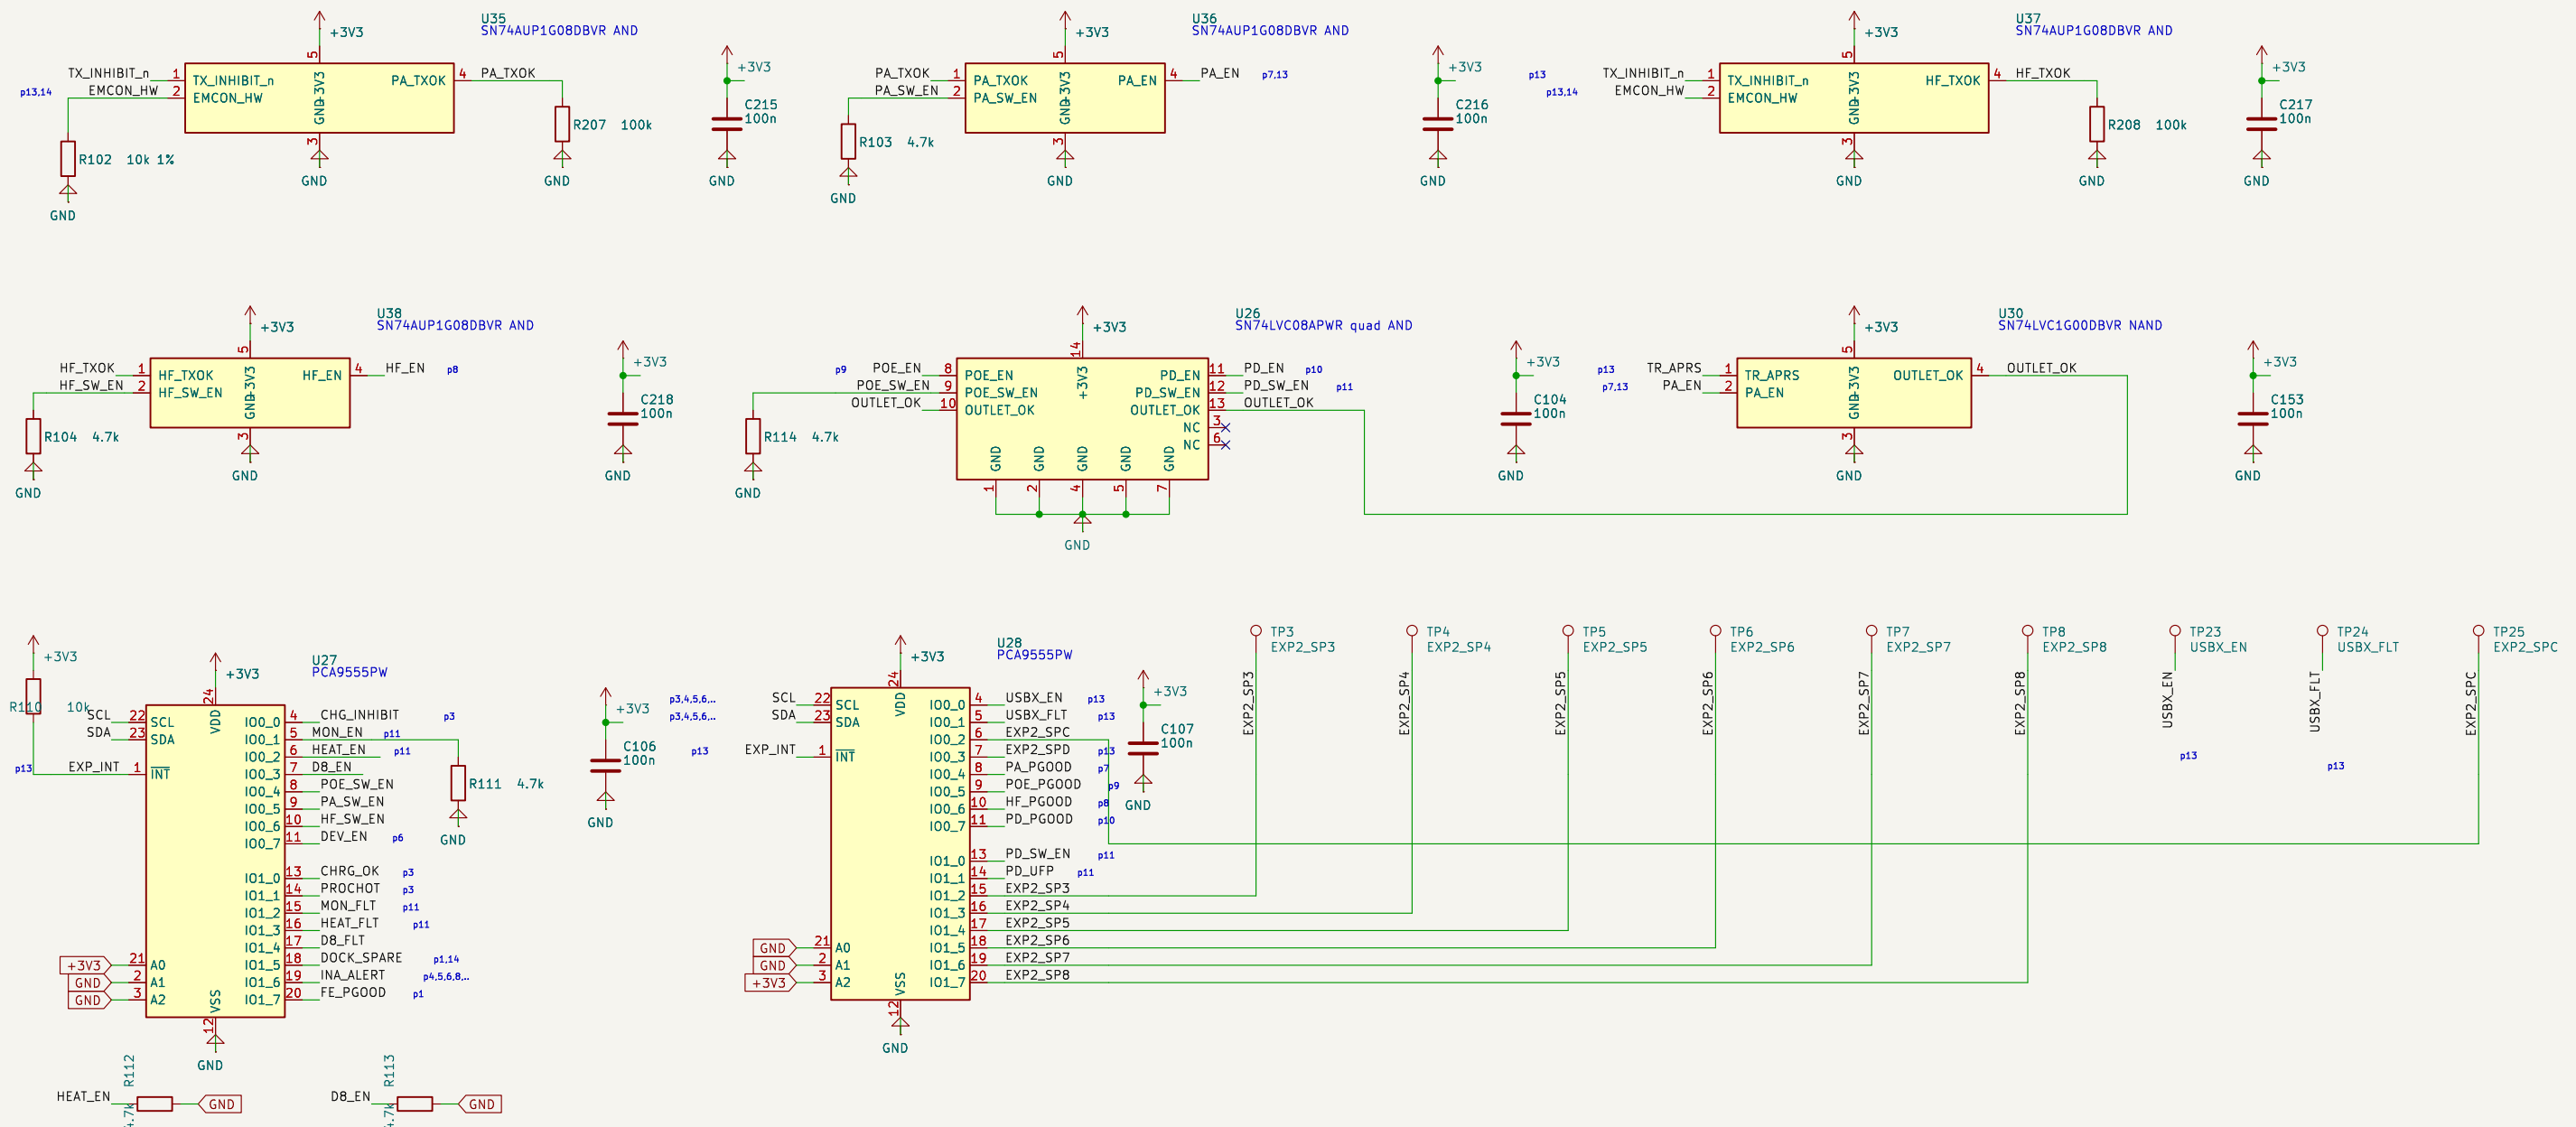


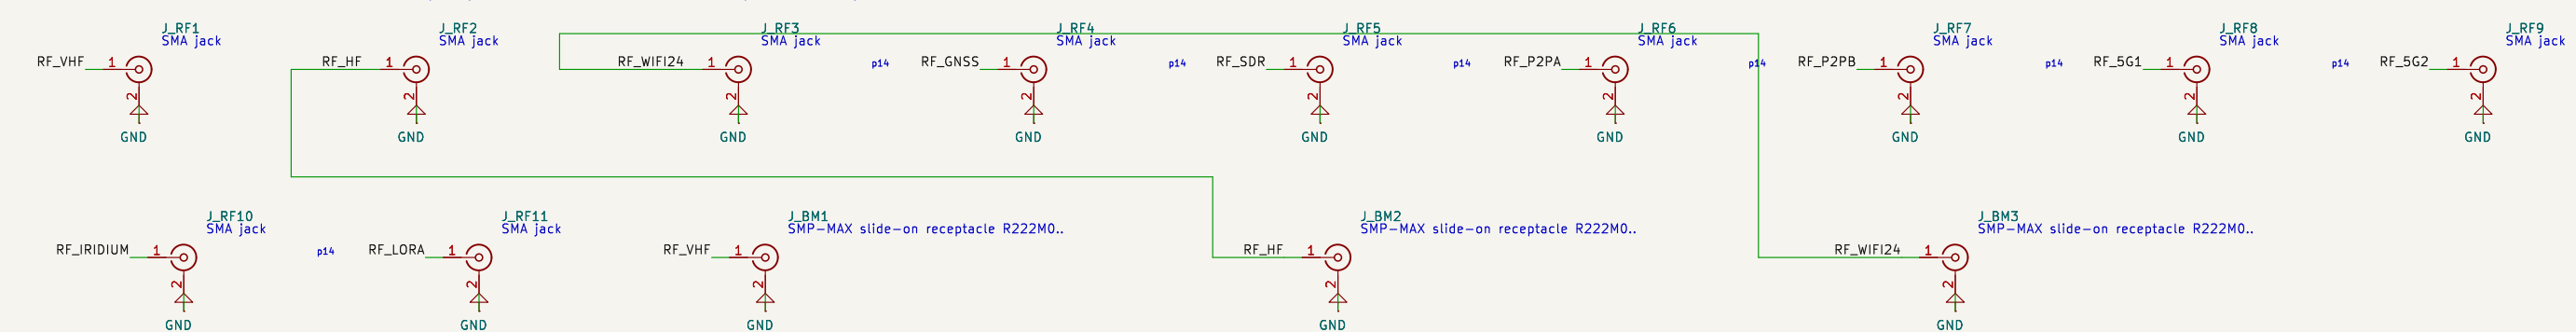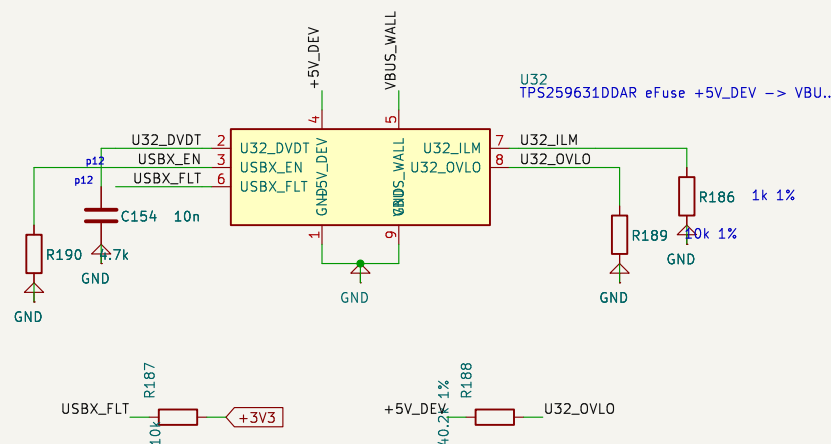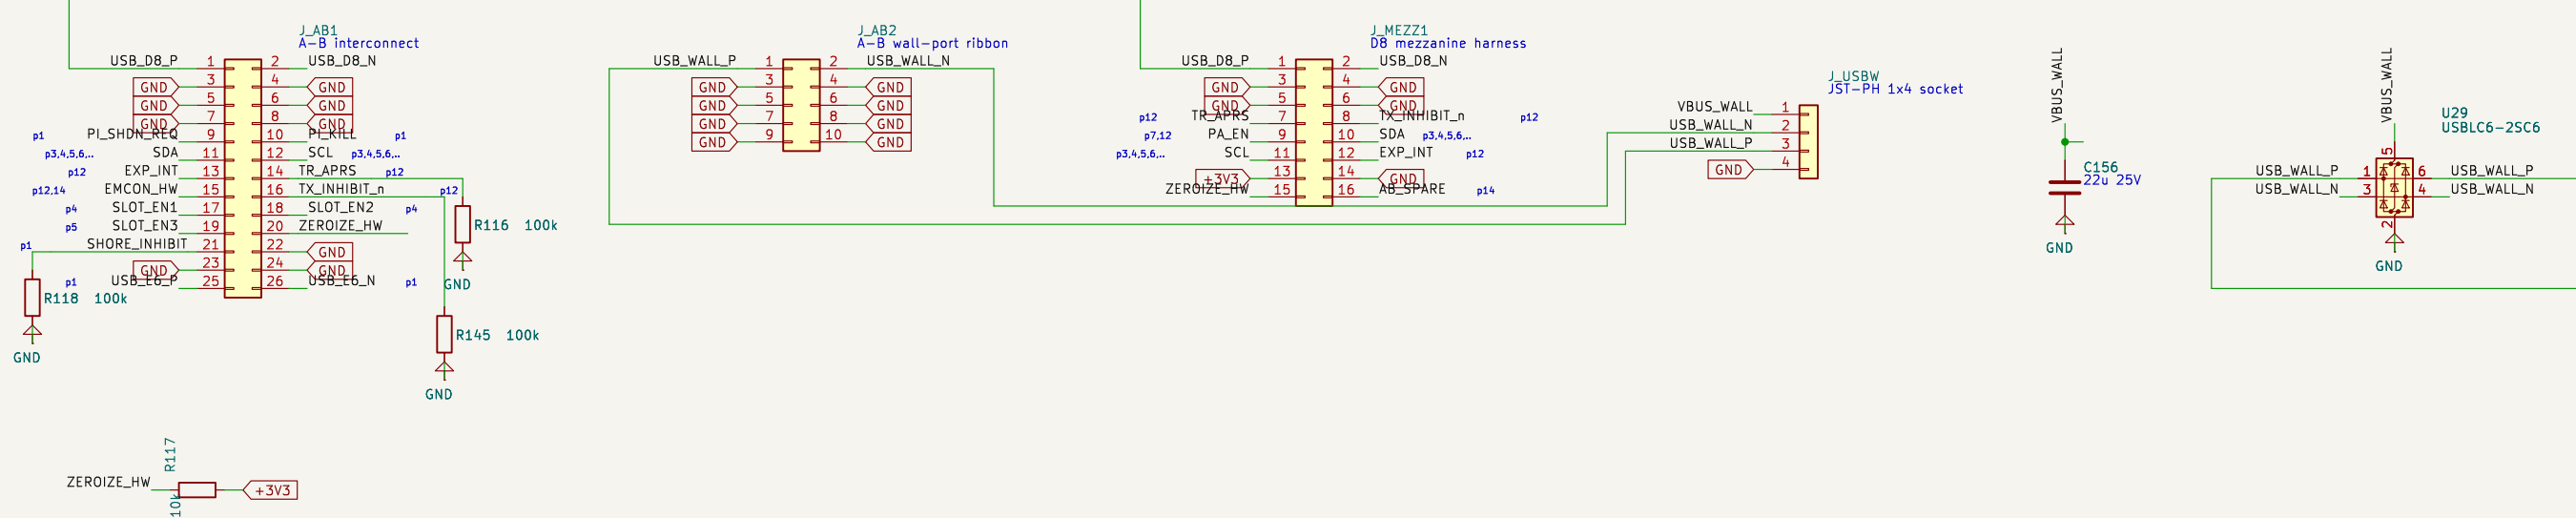

ELEVEN BLIND–MATE RF SITES: SMA JACK (TOP) + SMP–MAX RECEPTACLE (UNDERSIDE) (continued)

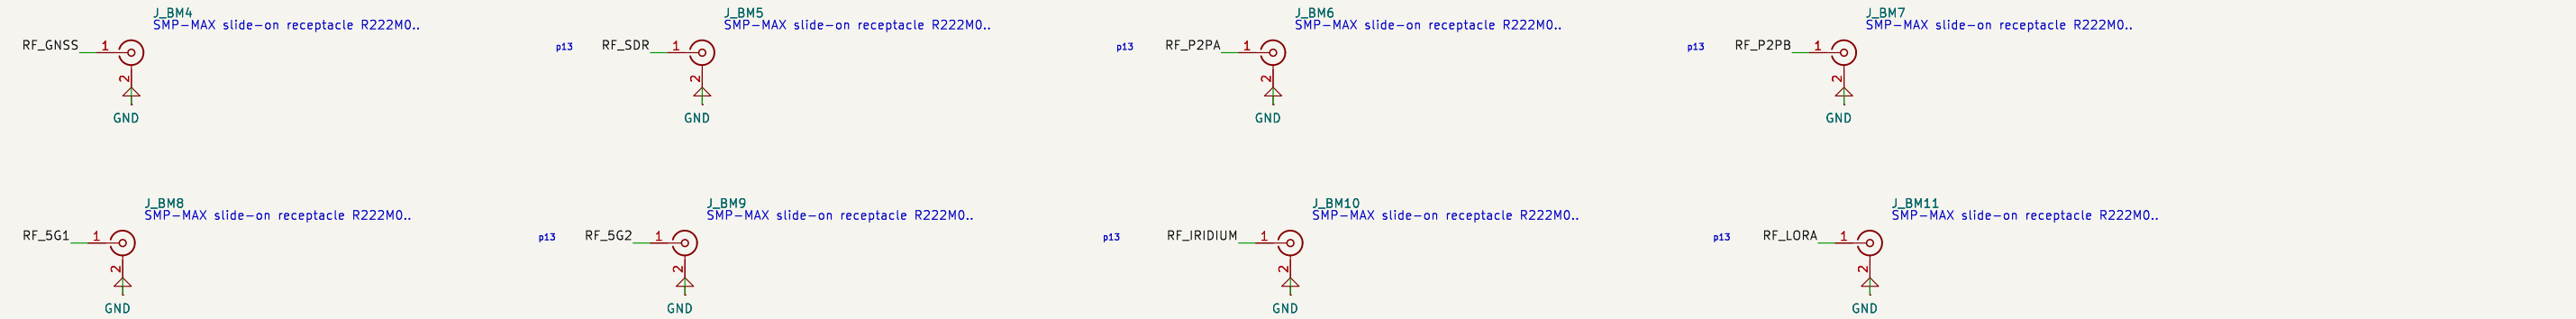

TEST POINTS, FLAGS

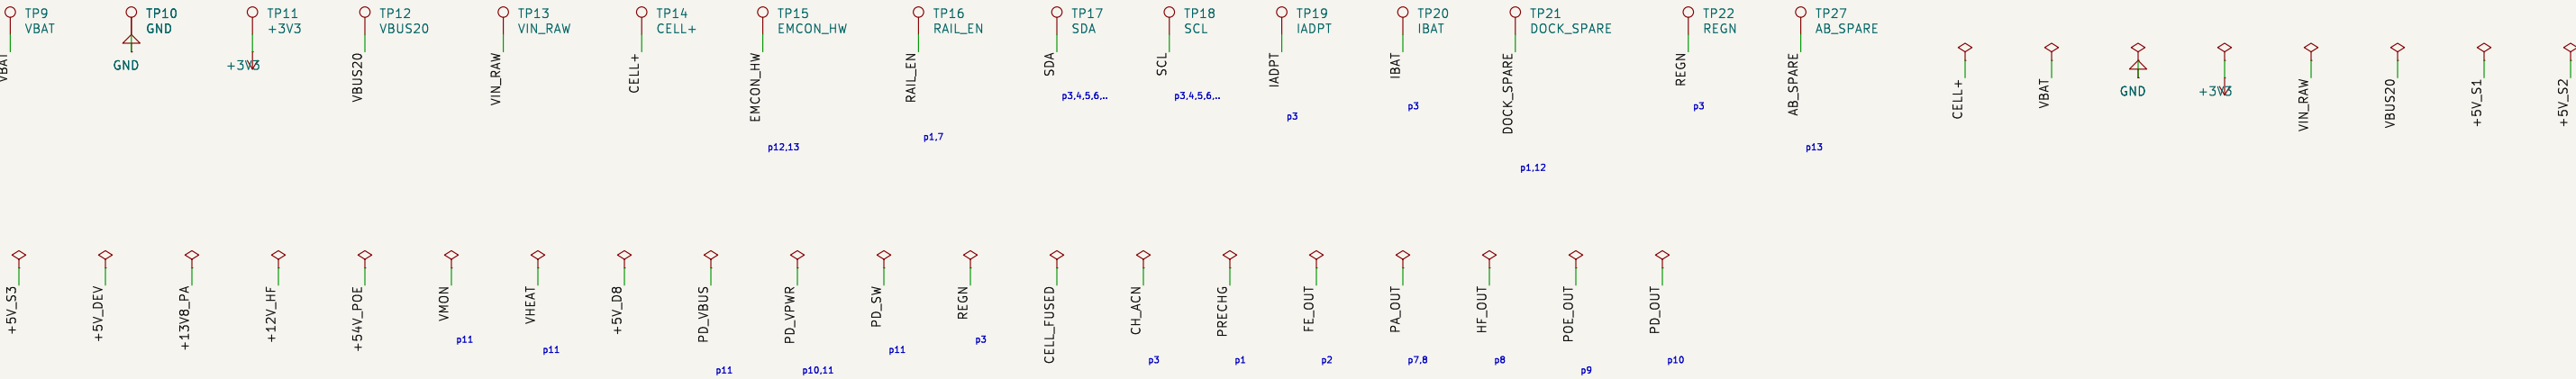

OTHER PARTS (not in a section list)

