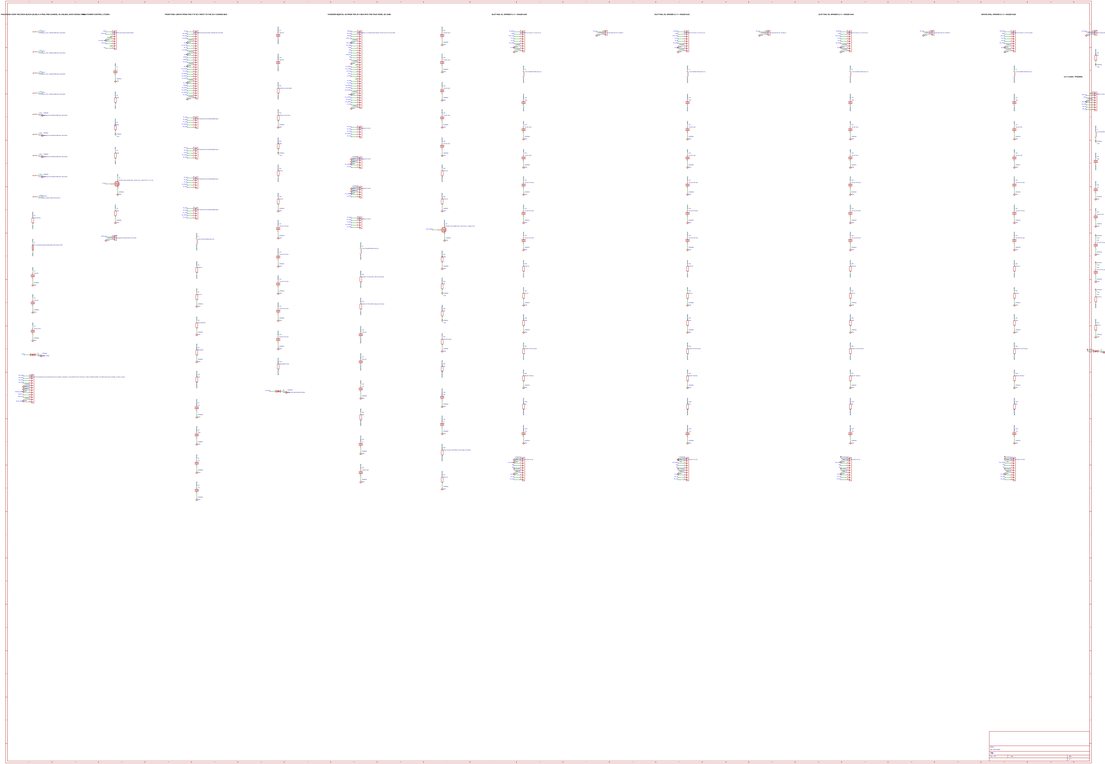

PACK NODE OVER THE DOCK BLOCK (32.56): 9 A PINS, PRE-CHARGE, 25 A BLADE, DOCK SIGNAL PINS
MAIN POWER CONTROL LTC2954
FRONT END: LM5176 FROM THE 9 TO 36 V INPUT TO THE 20 V CHARGE BUS
CHARGER BQ25731: 4S FROM THE 20 V BUS INTO THE PACK NODE, I2C 0x6B
SLOT RAIL S1: AP64500 5.1 V + INA226 0x40
SLOT RAIL S2: AP64500 5.1 V + INA226 0x41
SLOT RAIL S3: AP64500 5.1 V + INA226 0x44
DEVICE RAIL: AP64500 5.1 V + INA226 0x45
3.3 V LOGIC: TPS62933
PA RAIL: LM5176 13.8 V 6 A, EMCON GATED, INA226 0x46
HF RAIL: LM5176 12.0 V 2 A, EMCON GATED
POE RAIL: LM5176 BOOST 54 V 0.6 A, INA226 0x47
USB-C PD OUTLET: TPS25740A + LM5176 5/9/15 V STAGE
EFUSES: MONITOR, HEATER, D6 5 V
EMCON GATES 74LVC08, EXPANDERS 0x21 0x24
ELEVEN BLIND-MATE RF SITES: SMA JACK (TOP) + SMP-MAX RECEPTACLE (UNDERSIDE)
TEST POINTS, FLAGS
RIBBON J_AB1 2x13, MEZZANINE HARNESS J_MEZZ1 2x8, WALL USB DATA
OTHER PARTS (not in a section list)
Sheet : /
File : pcb-a-power
Title :
Size : "A0"
Date :
Rev :
Id : /