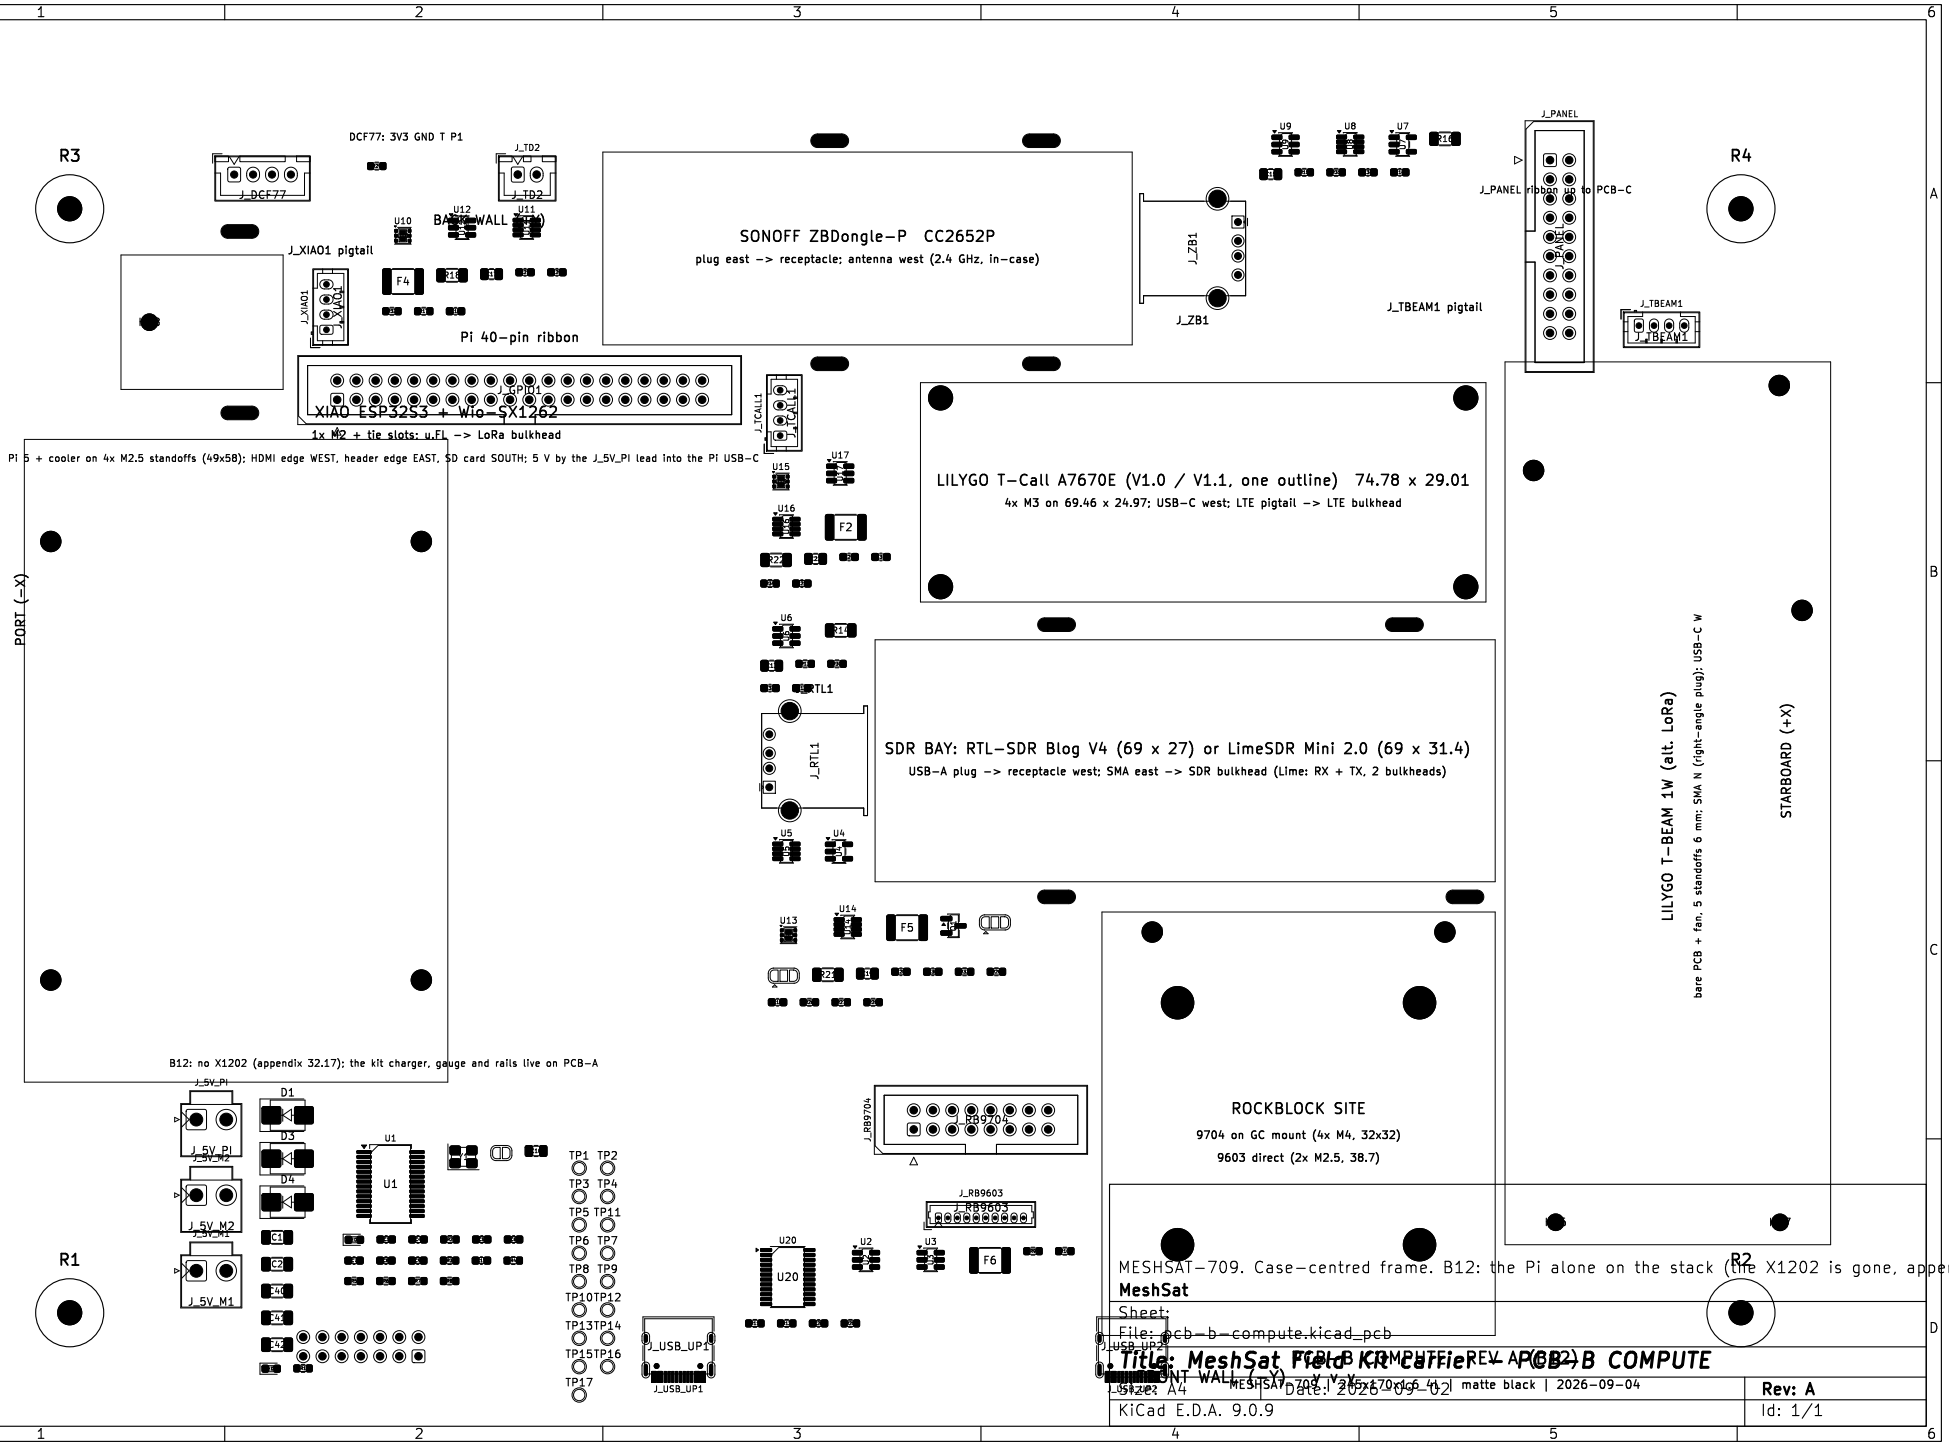
R3
R4
R1
R2
DCF77: 3V3 GND T P1
J_DCF77
J_TD2
J_TD2
BAT WALL (+X)
J_XIAO1 pigtail
J_XIAO1
SONOFF ZBDongle-P CC2652P
plug east -> receptacle; antenna west (2.4 GHz, in-case)
J_ZB1
J_ZB1
J_PANEL
J_PANEL ribbon up to PCB-C
J_TBEAM1 pigtail
J_TBEAM1
Pi 40-pin ribbon
J_PI1
XIAO ESP32S3 + Wio-SX1262
1x M2 + tie slots: u.FL -> LoRa bulkhead
J_TCALL1
LILYGO T-Call A7670E (V1.0 / V1.1, one outline) 74.78 x 29.01
4x M3 on 69.46 x 24.97; USB-C west; LTE pigtail -> LTE bulkhead
Pi 5 + cooler on 4x M2.5 standoffs (49x58); HDMI edge WEST, header edge EAST, SD card SOUTH; 5 V by the J_5V_PI lead into the Pi USB-C
PORT (-X)
J_RTL1
SDR BAY: RTL-SDR Blog V4 (69 x 27) or LimeSDR Mini 2.0 (69 x 31.4)
USB-A plug -> receptacle west; SMA east -> SDR bulkhead (Lime: RX + TX, 2 bulkheads)
LILYGO T-BEAM 1W (alt. LoRa)
bare PCB + fan, 5 standoffs 6 mm; SMA N (right-angle plug); USB-C W
STARBOARD (+X)
B12: no X1202 (appendix 32.17); the kit charger, gauge and rails live on PCB-A
J_5V_PI
J_5V_M2
J_5V_M1
J_RB9704
J_RB9603
ROCKBLOCK SITE
9704 on GC mount (4x M4, 32x32)
9603 direct (2x M2.5, 38.7)
J_USB_UP1
J_USB_UP2
MESHSAT-709. Case-centred frame. B12: the Pi alone on the stack (the X1202 is gone, appendix 32.
MeshSat
Sheet:
File: pcb-b-compute.kicad_pcb
Title: MeshSat Field Kit Carrier — PCB-B COMPUTE
REV A (CB-2)
Size: A4
Date: 2026-09-02
KiCad E.D.A. 9.0.9
Rev: A
Id: 1/1